GSW®
www.GSW-USA.com

Item No.:_____
Order No.:_____
Qty:_____Date:_____

Features

8” centers; 1.8 GPM aerator
Swing spout from 6”~16”; 1/2” NPT connection
Chrome-plated copper construction
Labeled hot and cold handles

Optional Installation Kit:

1/2” NPT supply nipple unit
1-1/2” x 3-3/8”

Intertek

Description 8” Heavy Duty Faucet

Featuring a flow rate of 1.8 GPM and a 1/2” NPT connection, this faucet is great for quickly filling up buckets and sink compartments for dishwashing and other general cleaning tasks. It’s perfect for restaurants, grocery stores, schools, and hotels. An installation kit is required for setup (sold separately).

Plan View AA-812GT

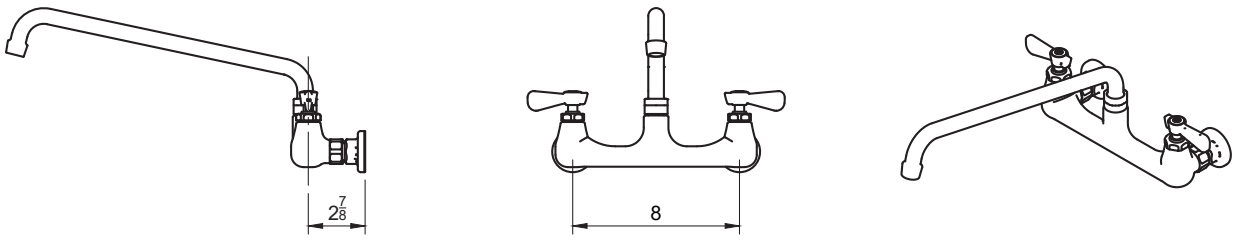

Item No.	Spout (Optional)	Description	G. W. (lb)	Qty. /case
AA-800GT		Base Only, No Spout	51	12
AA-800S		Supply Inlet For AA-8xx Series	50	100
AA-800W		Rubber Washer	2	1000
	AA-006G	Optional 6” Spout for AA-8xxGT Series	16	24
	AA-008G	Optional 8” Spout for AA-8xxGT Series	17	24
	AA-010G	Optional 10” Spout for AA-8xxGT Series	19	24
	AA-012G	Optional 12” Spout for AA-8xxGT Series	20	24
	AA-014G	Optional 14” Spout for AA-8xxGT Series	22	24
	AA-016G	Optional 16” Spout for AA-8xxGT Series	23	24

- 1/2 NPT female inlets

GSW 4177 Rowland Ave. #B, El Monte, CA 91731 **Tel:** 1-800-897-5999, 1-626-291-5599 **Fax:** 1-866-499-3088, 1-626-286-0166 GSW-USA.com