

Complete the cold chain

The ARCTIKO -76°F / -60°C freezer is perfect for storing Super frozen tuna and other high quality foods. Reliable cooling technology and timeless Danish designs together with a digital display and castors, ensures that you get the complete package with the possibility for easy cleaning around and below.

SF SERIES -76°F -60°C

Features

- Single compressor
- Low energy consumption
- Low noise level
- 100% HCFC/CFC free
- Key lock, castors and baskets

Controller features

- Digital display
- Visual and acoustic alarm
- Adjustable high/low temperature alarm
- Contact for remote alarm
- Probe failure alarm



SF150



SF500

As a synonym for security, the SF series gives reliable low temperature freezing, with good temperature uniformity. Digital display, alarms, contact for remote monitoring, basket(s) and castors are some of the standards.

Model	SF150	SF500
Dimensions exterior WxDxH (inches)	28,1x27,1x34,8	61,4x27,1x34,8
Net capacity (L)	133	368
Temperature range (°C)	-40/-60	-40/-60
Temperature range (°F)	-40/-76	-40/-76
Power supply (V)	120	120
Frequency (Hz)	60	60
Power consumption (KWH/24H)	6,6	7,7

We reserve the right to change specifications without notice. Subject to confirmation and availability.




Technical specifications



Model	SF150	SF500
Dimensions exterior WxDxH (inches)	28.3x27.1x34.8	61.4x27.1x34.8
Dimensions exterior WxDxH (mm)	720x695x885	1560x695x885
Net capacity (L)	133	368
Net capacity (cu. FT)	4,9	13,5
Dimensions interior WxDxH (inches)	22.0x17.3x26.0	55.1x17.3x26.0
Dimensions interior WxDxH (mm)	560x440x660	1400x440x660
Insulation (inches)	3.15	3.15
Insulation (mm)	80	80
Temperature range (°F)	-40 / -76	-40 / -76
Temperature range (°C)	-40 / -60	-40 / -60
Max. ambient temperature (°F)	77	77
Max. ambient temperature (°C)	25	25
Power supply (V)	120	120
Frequency (Hz)	60	60
Power consumption (KWH/24H)	6,6	7,7
AMP (A)	3,6	3,6
Noise level (DBA)	<55	<55
Weight (KG)	59	89
Shipping weight (KG)	64	94
Shipping weight with wooden box (KG)	91	141
Shipping dimensions WxDxH (inches)	29.9x27.6x37.8	63.0x27.6x37.8
Shipping dimensions WxDxH (mm)	760x700x960	1600x700x960
Shipping dimensions with wooden box WxDxH (inches)	31.7x29.7x44.9	65.2x29.7x45.1
Shipping dimensions with wooden box WxDxH (mm)	805x755x1140	1655x755x1145
No. of compressors.	1	1
Visual / Acoustic alarm	√ / √	√ / √
Adjustable high/low temperature alarm	√	√
Probe failure alarm	√	√
Alarm display as codes	√	√
Contact for remote alarm	√	√
Prepared for GSM alarm module	√	√
Porthole for installation of PT100/CO ² back up	optional	optional
Digital display	√	√
Defrost manual / auto	manual	manual
Castors	√	√
Chart recorder	optional	optional
Basket (pcs)	1	4
Lighting	√	√
Lock	√	√
Inner liner material	Varnish steel	Varnish steel
Cabinet material	Varnish steel	Varnish steel
Colour (exterior)	white	white
Refrigerant	HC	HC

We reserve the right to change specifications without notice. Subject to confirmation and availability

DUS00003-02

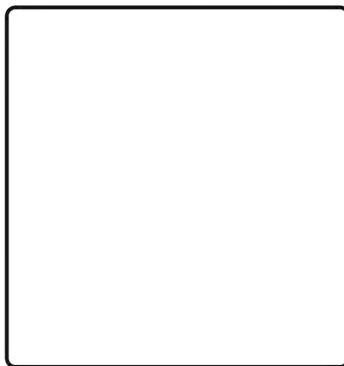

ETL: UL code 471
NSF standard nr. 7