

Merchandisers

MERCHANDISER REFRIGERATORS

MERCHANDISER FREEZER



BUILT TO PERFORM, DESIGNED TO DELIVER

The Asber Merchandiser Refrigerators and Freezers combine durability, efficiency, and eye-catching design for superior product display. A chip-resistant black vinyl exterior ensures lasting appeal, while the bright white interior and stainless-steel floor enhance visibility, hygiene, and easy cleaning—perfect for any retail or foodservice environment.

INSULATION & ENERGY EFFICIENCY

High Performance, Environmentally Responsible Design

- Ecomate™ insulation: Industry-leading, eco-friendly technology (ODP-0, GWP-3) for exceptional temperature retention and energy savings.
- Maximum thermal efficiency: 2" thick insulation throughout.

REFRIGERATION SYSTEM & PERFORMANCE

Efficient, Reliable, and Environmentally Friendly

- R290 Hydrocarbon refrigerant: Delivers quicker temperature recovery and lower energy consumption, ensuring environmental responsibility.
- Reversible Condensing Fan Motor: Ensuring optimal airflow, reduced maintenance, and improved long-term efficiency.
- Hermetic compressor system with epoxy-coated evaporator provides long-lasting performance and corrosion resistance operation.
- Electronic controller with digital display provides accurate, easy-to-monitor temperature management.
- Temperature ranges in ambient conditions up to 100°F and 65% RH:
 - Refrigerators: 32°F to 38°F. / Freezer: 0°F to -8°F.

LIGHTING & DISPLAY FEATURES

Clear, Attractive, and Energy-Efficient

- Argon-insulated double-pane (refrigerator) and triple-pane (freezer) glass doors for improved efficiency and condensation-free visibility.
- Energy-efficient, shadow-free LED interior lighting, for product visibility.
- Model "47" features sliding glass doors for space-saving operation.

CONSTRUCTION & FEATURES

Durable, Safe, and Easy to Maintain

- Chip-resistant black vinyl exterior: Provides superior scratch and wear resistance versus painted surfaces, for a sleek look in busy retail areas.
- NSF-approved white coated steel interior walls ensure easy cleaning, sanitation, and long-lasting use.
- Stainless-steel floor: Provide exceptional durability, easy cleaning, and superior sanitation for food safety compliance.
- Doors lock with a universal key for product security during off-hours.
- Field-reversible doors on solid single-door models for flexible installation.

OPERATOR-FOCUSED DESIGN

Ergonomic, Practical, and Sanitary

- In-step interior design: provides a superior door seal, reducing energy loss, and preventing condensation.
- Magnetic one-piece door gaskets: Ensure a tight seal to preserve internal temperatures; tool-free removable, simplifying cleaning and maintenance.
- Standard 4" casters (front with brakes) provide stability, mobility, and easy access for cleaning and maintenance.
 - 17 ft³ models include 2-1/2" casters, front with brakes.

CERTIFICATIONS

- NSF-7 Certified: Meets rigorous food safety and sanitation standards.
- ETL Listed: Certified for electrical and mechanical safety.
- DOE Compliant: Meets U.S. Department of Energy efficiency standards.

OPTIONS & ACCESSORIES

- 6" Stainless-steel legs.
- Extra shelves.



ARM 17 A



AFMD 23 A




ARMD 47 SD A

MODEL	DOORS	SHELVES	CAPACITY	VOLTS - FREQUENCY	POWER	AMP	EXTERIOR DIMENSIONS (in)			SHIPPING	
			ft³		HP		Width	Depth	Height	Lbs	ft³
SWING DOORS REFRIGERATORS											
ARM 17 A	1	4	17.0	115V. - 60Hz.	1/4	2.5	27-1/2	26-3/4	77-1/8	260	42.4
ARMD 23 A	1	4	23.0	115V. - 60Hz.	1/4	2.5	28-1/8	31-1/8	83-1/2	289	49.4
ARMD 37 A	2	8	37.0	115V. - 60Hz.	1/3	3.2	43-1/2	32-1/4	84	395	74.2
ARMD 49 A	2	8	49.0	115V. - 60Hz.	1/3	3.2	55-1/4	31-1/8	83-1/2	459	88.3
ARMD 72 A	3	12	72.0	115V. - 60Hz.	2 x 1/3	7.5	82-3/4	32-1/4	85-1/4	633	155.4
SLIDING DOORS REFRIGERATOR											
ARMD 47 SD A	2	8	49.0	115V. - 60Hz.	1/3	3.2	55-1/4	31-1/8	83-1/2	459	88.3
SWING DOORS FREEZERS											
AFMD 23 A	1	4	23.0	115V. - 60Hz.	1/2	5.0	28-1/8	31-1/8	83-1/2	289	49.4

SPECIFICATIONS MAY CHANGE WITHOUT PRIOR NOTICE | HEIGHT INCLUDES CASTERS. | VALID FOR CONTINENTAL USA & CANADA. | MAR, 2026

Merchandisers

MERCHANDISER REFRIGERATORS
MERCHANDISER FREEZER

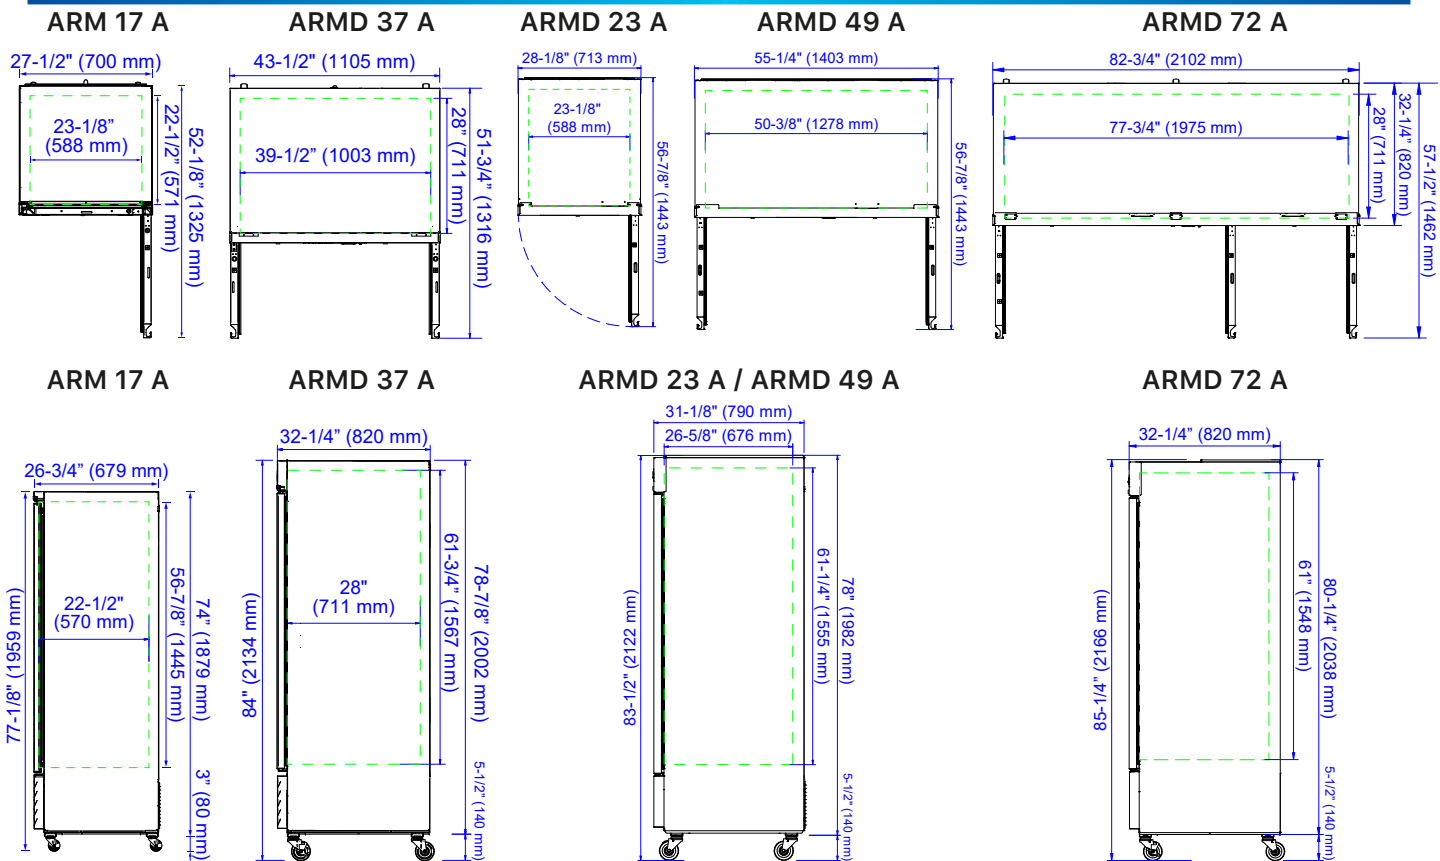

MODEL	ARM 17 A	ARMD 23 A	ARMD 37 A	ARMD 49 A ARMD 47 SD A	ARMD 72 A	AFMD 23 A
ELECTRICAL DATA						
Volts - Frequency	115V. - 60Hz.					
Power (HP)	1/4		1/3		2 x 1/3	1
Full Amp Load	2.5		3.2		7.5	8.3
Plug Type	NEMA 5-15P				NEMA 5-15P (2)	NEMA 5-15P
Refrigerant	R290					
INTERIOR DIMENSIONS (in)						
Width	23-1/8		39-1/2	50-3/8	77-3/4	23-1/8
Depth	22-1/2	26-5/8	28	26-5/8	28	26-5/8
Height	56-7/8	61-1/4	61-3/4	61-1/4	61	61-1/4
Shelf (in)	22-1/2 x 20-1/8	23-5/8 x 22-1/2	25-3/8 x 19-1/4	23-5/8 x 22-1/2	24-1/4 x 24-1/4	23-5/8 x 22-1/2
					27-3/8 x 24-1/4	
SHIPPING DIMENSIONS (in)						
Width	29-1/2	33-1/2	46-1/8	56-1/4	85-3/8	46-1/8
Depth	29-1/2		35	32-1/4	36-5/8	35
Height	80-3/4	84-5/8	83-7/8	84-5/8	85-3/8	83-7/8



INSTALLATION REQUIREMENTS

- ELECTRICAL CONNECTION:** Units pre-wired at factory with chord and NEMA 5-15P plug set included for 115/60/1 phase.
- REFRIGERANT:** R290 is classified as A3 flammable refrigerant; risk of fire or explosion due to puncture of refrigerant tubing; follow handling instructions carefully.

- RESIDENTIAL APPLICATIONS DISCLAIMER:** Asber assumes no liability for parts or labor coverage for component failure, factory defect or any other damages for units installed in non-commercial foodservice or residential applications.

SPECIFICATIONS MAY CHANGE WITHOUT PRIOR NOTICE | HEIGHT INCLUDES CASTERS. | VALID FOR CONTINENTAL USA & CANADA. | MAR, 2026