



PORTIONING SCALES

PPC SERIES

Model:

PPC 4/8
PPC 5/10
PPC 8/16
PPC 10/20



Product features

- ✓ Available in 8, 10, 16 and 20lb capacity
- ✓ Toggles between kg, lb and oz with one button
- ✓ Robust stainless steel case and plate
- ✓ 100 hours duration rechargeable battery
- ✓ Pedal foot accessory, for tare operation
- ✓ With indicator module WI
- ✓ RS232 Serial communication


Product highlights



Pedal foot for handsless operation



Easy weight visibility

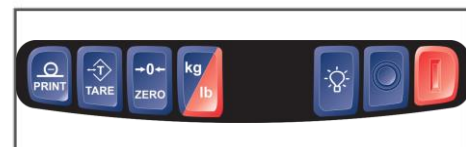

Unit conversion

Certifications



Warranty






PORTIONING SCALES

PPC SERIES

Dimensions

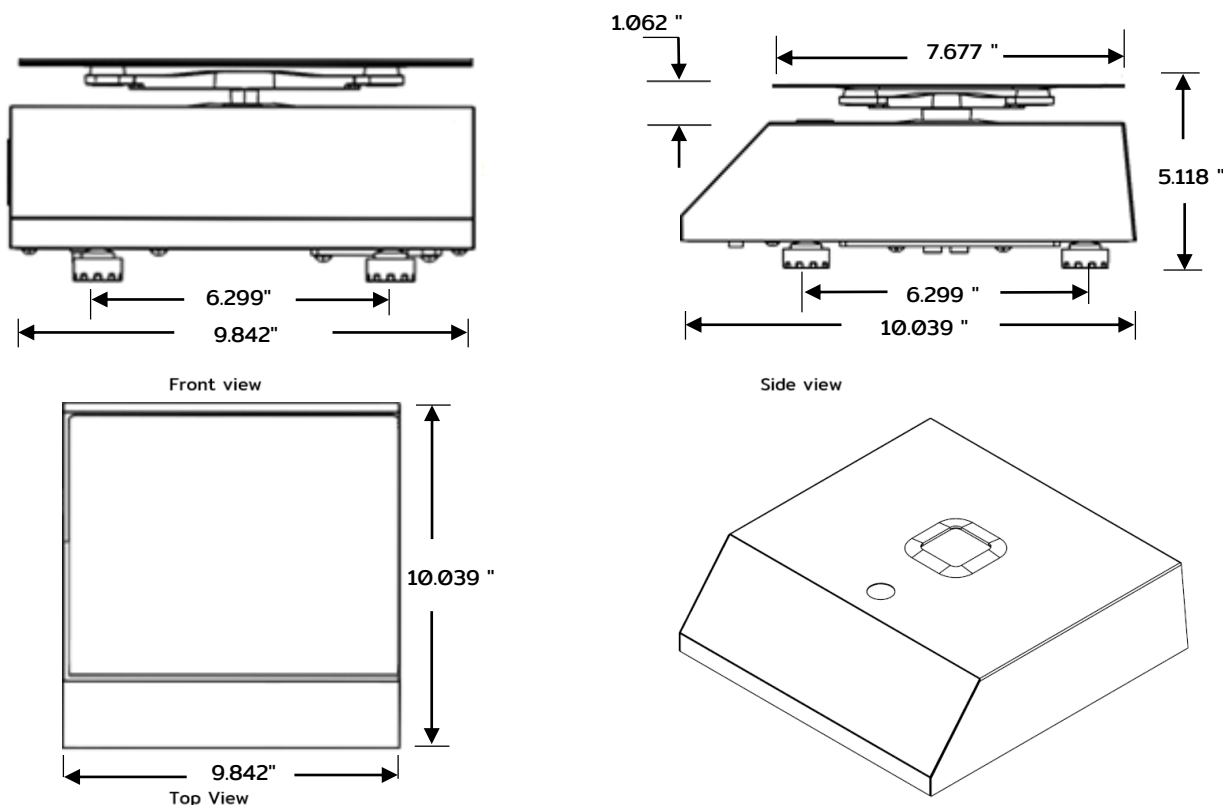

Technical specifications

Dimensions PPC 4/8, PPC 5/10, PPC 8/16, PPC 10/20: Electrical data

External dimensions	W: 10.039" D: 9.842" H: 5.118"
Packging dimensions	W: 14.173" D: 13.976" H: 11.811"
Net weight	7.3854 lb
Total weight (packing included)	10.912 lb
Plate dimensions	W: 7.677" D: 9.842" H: 1.00"

Power supply	100-240 Vac 50/60 Hz / 9Vdc
Amps	0.2A / 0.5 A
Cord length	70.00"
Plug type	NEMA-5-15P
Display	LCD display with backlight

Construction

Cabinet material	Stainless steel
Plate material	Stainless steel
Plate holder	High strength reinforced plastic
Leveling feet	4 adjustable foot

Performance data

Capacity	8 lb / 10 lb / 16 lb / 20 lb
Minimal division	1g/0.002lb 1g/ 0.002lb
	2g/0.005lb 2g/0.005lb
Max. Tare	8 lb / 10 lb / 16 lb / 20 lb

Logistic data

Units per pallet	45
Weight per pallet	530.762 lb
Dim. Per pallet	44.883" x 48.031" x 64.566"
Storage temperature	-4°F to 122°F (-20°C to 50°C)

Additional data


Operation temperature	14°F to 104°F (-10°C to 40°C)
Communication	Serial RS-232
Software PC available	Software scale
Pedal Tare accessory	Included




PORTIONING SCALES

PPC SERIES


Dimensions

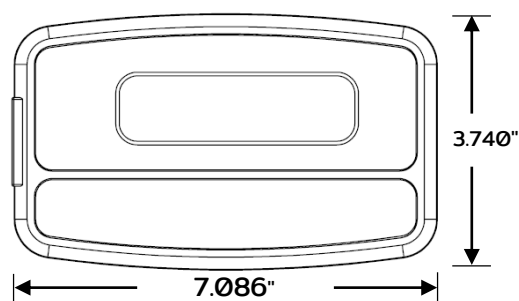


Front view

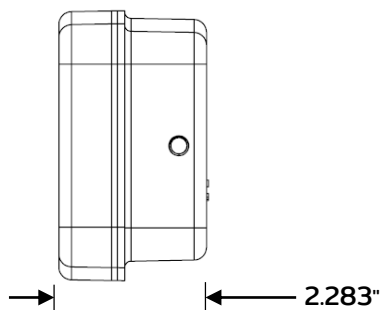

Side view

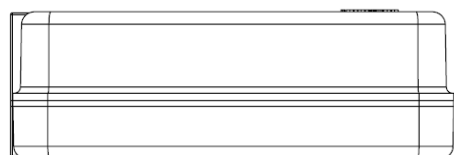

Top View



Technical specifications

Dimensions PPC 4/8, PPC 5/10, PPC 8/16, PPC 10/20: Electrical data

External dimensions	W: 10.039" D:9.842" H: 5.118"
Packing dimensions	W: 14.173" D:13.976" H: 11.811"
Net weight	7.3854 lb
Total weight (packing included)	10.912 lb
Plate dimensions	W: 7.677" D: 9.842" H: 1.00"

Power supply	100-240 Vac 50/60 Hz / 9Vdc
Amps	0.2A / 0.5 A
Cord length	70.00"
Plug type	NEMA-5-15P
Display	LCD display with backlight

Construction

Indicator module material	ABS Plastic

Performance data

Capacity	8 lb / 10 lb / 16 lb / 20 lb
Minimal division	1g/0.002lb 1g/ 0.002lb
	2g/0.005lb 2g/0.005lb
Max. Tare	8 lb / 10 lb / 16 lb / 20 lb

Logistic data

Units per pallet	45
Weight per pallet	530.762 lb
Dim. Per pallet	44.883" x 48.031" x 64.566"
Storage temperature	-4°F to 122°F (-20°C to 50°C)

Additional data

Operation temperature	14°F to 104°F (-10°C to 40°C)
Communication	Serial RS-232
Software PC available	Software scale
Pedal Tare accessory	Included