



# BEVERAGE-AIR®

PROJECT: \_\_\_\_\_  
ITEM # \_\_\_\_\_ QTY: \_\_\_\_\_  
MODEL # \_\_\_\_\_  
AIA # \_\_\_\_\_ SIS # \_\_\_\_\_  
APPROVED: \_\_\_\_\_

THAW CABINET

## THAW CABINET

### Model: HTPS1WHC-1S

SOLID DOOR



## 7 YEAR WARRANTY Parts, Labor, and Compressor

### CABINET CONSTRUCTION

- Exterior is stainless steel front and sides
- Stainless steel interior
- Full electronic control
- One piece grille
- Self-closing door with 120° stay-open feature, on cam-lift hinges
- Field reversible door
- Door lock
- Snap-in magnetic gaskets for positive door seal
- 14 Pair of tray slides for full size sheet pans or 28 1/2 half pans (pans not included)
- 6" Heavy-duty casters, two (2) with brakes
- 8' Cord and plug (see electrical data for details)

### REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Hot gas condensate evaporator
- Adaptive defrost
- Epoxy coated evaporator coil
- Maintains product temperatures between 36°F and 39°F
- **Smart Thaw Technology:** Automatically transitions to thaw mode when loaded with frozen products, no need for operator interaction.
- **High-Performance Heating & Airflow:** Delivers powerful heat and robust airflow while carefully preserving food quality and safety.
- **Seamless Transition to Cool Mode:** Automatically switches to standard refrigeration mode after thawing, ensuring optimal storage for the full product lifecycle.



### OPTIONS & ACCESSORIES

- Stainless steel breaker
- 6" Legs seismic/flanged
- 3" Casters

3779 Champion Blvd., Winston-Salem, NC 27105  
888-845-9800 Fax: 336-245-6453  
Beverage-Air.com Sales@bevair.com




Please verify qualifying units by visiting:  
[www.energystar.gov/cfs](http://www.energystar.gov/cfs)

Specifications are subject to change without prior notice.  
Date Issued 3/26 Printed in U.S.A.


# BEVERAGE-AIR®

## Thaw Cabinet Model: HTPS1WHC-1S


PLAN VIEW

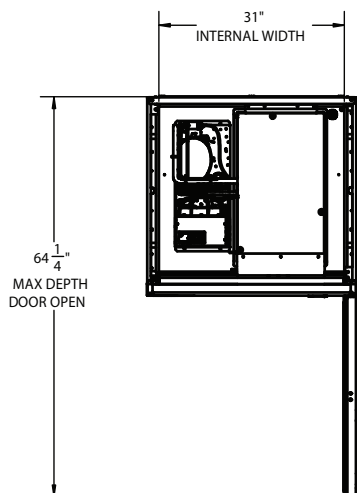

ELEVATION VIEW

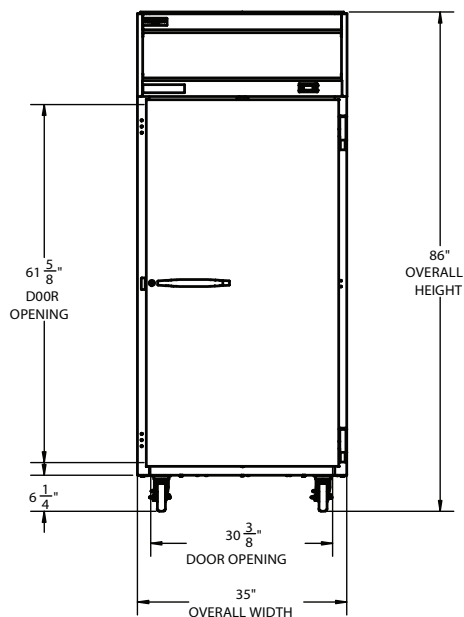

SIDE VIEW

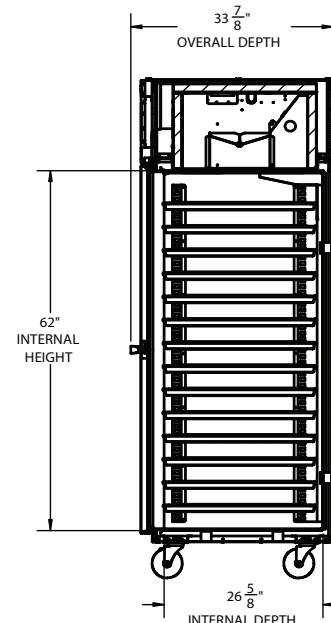

### EXTERNAL DIMENSIONAL DATA

|                               |                                         |
|-------------------------------|-----------------------------------------|
| Width Overall (in)            | 35"                                     |
| Depth Overall (in)            | 33 $\frac{7}{8}$ "                      |
| Height Overall (in)           | 86"                                     |
| Number of Doors               | 1                                       |
| Depth with Door Open 90° (in) | 64 $\frac{1}{4}$ "                      |
| Door Openings (in)            | 30 $\frac{3}{8}$ " x 61 $\frac{5}{8}$ " |

### INTERNAL DIMENSIONAL DATA

|                              |                    |
|------------------------------|--------------------|
| NET Capacity (cubic ft.)     | 22.490             |
| Internal Width Overall (in)  | 31"                |
| Internal Depth Overall (in)  | 26 $\frac{5}{8}$ " |
| Internal Height Overall (in) | 62"                |

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM).

Required Clearance: Top 12" and Rear 3"

### ELECTRICAL DATA

|                     |          |
|---------------------|----------|
| Full Load Amps      | 13.9     |
| Voltage             | 115/60/1 |
| Nema Plug (8' cord) | 5-20P    |

### REFRIGERATION DATA

|                           |                     |
|---------------------------|---------------------|
| Horsepower                | 1/4                 |
| Capacity (BTU/Hr)         | 1702                |
| Heat Rejection (BTU/Hr)   | 2553                |
| Charge (lbs/grams/ounces) | 0.2425 / 110 / 3.88 |

### SHIPPING DATA

|                       |          |
|-----------------------|----------|
| Gross Weight - Crated | 400 lbs. |
| Height - Crated (in)  | 88"      |
| Width - Crated (in)   | 41"      |
| Depth - Crated (in)   | 41"      |

### ELECTRICAL CONNECTION



115/60/1  
NEMA 5-20P

Unit pre-wired at factory and include 8' long cord and plug set.

3779 Champion Blvd., Winston-Salem, NC 27105 | 888-845-9800 | Fax: 336-245-6453 | Beverage-Air.com | Sales@bevair.com

Date Issued 3/26 | Printed in U.S.A.