



R2A-FGEN

52" Two Section Full Glass Door Refrigerator



R2A-FGEN
04/29/26
Item # 13756

W x D x H

52" x 33.5" x 79.5" *
*with 4" casters



Dimensions / Capacity

Interior Storage Capacity (CF) (AHAM)

Overall Width x Depth

Height (including 4" casters)

Door Opening Width x Height

Depth with Door Open at 90°

Adjustable Shelves

Shelf Dimensions (W x D)

Adjustable Center Shelves

Crated Length x Width x Height

Crated Shipping Weight

Two Section R2A-FGEN

48.76 ft³

52" x 33.5"

79.5"

20.25" x 59.25"

57.75"

6

19.75" x 26"

3

58" x 37.5" x 81"

562 lbs.

Electrical / Refrigeration

Voltage

HACR Breaker

Electrical Connection (NEMA)

Voltage Range

Ambient Temp. Range

Control Setpoint Range

Amperage

Energy Consumption (kWh/day) @ASHRAE

Heat Rejection (BTU/Hr.) @NSF

Approx. Nominal Compress. BTU/HR (HP)

Refrigerant / Charge Amount (oz)

Two Section R2A-FGEN

115/60/1

15.0 Amps

5-15P ⚡

104-126

45° to 100°F

31° to 52°F

8

5.49

1066.93

1545(1/2HP)

R290 / (4.9 oz)

Options

☐ 4" Casters

☐ 6" Casters

☐ 6" Adjustable Legs (LP-6 LEG, LP-6P LEG)

☐ Stainless Steel Shelves (HS-5679, HS-5680)

☐ Additional Epoxy Shelves (HS-5614, HS-5658)

☐ Foot pedal door opener (HS-5380)

☐ Heated Condensate Pan (HS-5462)

☐ Tray Pan Slides (HS-3557, HS-5093)



Seven year warranty
on labor, parts, and
compressor. Valid in
United States, Canada,
Puerto Rico and U.S.
Territories.

For more information, please visit
hoshizakiamerica.com/support/warranty/

Item #: _____

Project: _____

Qty: _____

AIA#: _____

Features

► **Maximum interior storage capacity with smallest external footprint**

► **Stainless steel interior with stainless steel exterior front, sides and top**

► **Unique ducted air distribution system**

- Energy efficient interior LED light
- Environmentally friendly R290 hydrocarbon refrigerant
- Solid state digital controller with temperature alarms and LED display (Fahrenheit or Celsius)
- Cabinet and doors are insulated with 2-3/8" of CFC free, foamed in place polyurethane
- Stainless steel exterior and interior door come standard with locks
- Exclusive stepped door design to protect recessed door gasket
- Spring assisted self-closing doors with stay open feature
- Sturdy 8 gauge stainless steel hinge plate with welded hinge pin
- Extruded aluminum flush mount door handle
- Field reversible doors
- Evaporator coils are epoxy electrocoated (E-Coat) to help fight corrosion
- Energy efficient automatic hot gas condensate evaporator
- Top mount refrigeration comes standard with a condenser filter
- Refrigerant flow is controlled with thermostatic expansion valve
- Stainless steel shelf supports
- (3) epoxy coated wire shelves are standard per section
- Center shelves for added storage capacity
- Standard with 4" casters (two with brakes)
- Stackable (two units high) to conserve warehouse floor space
- 10 ft. cord and plug

If GFCI is required, a GFCI breaker MUST be used in lieu of GFCI receptacle

Hoshizaki reserves the right to change specifications without notice.




R2A-FGEN

52" Two Section Full Glass Door Refrigerator




R2A-FGEN
04/29/26
Item # 13756


FRONT VIEW

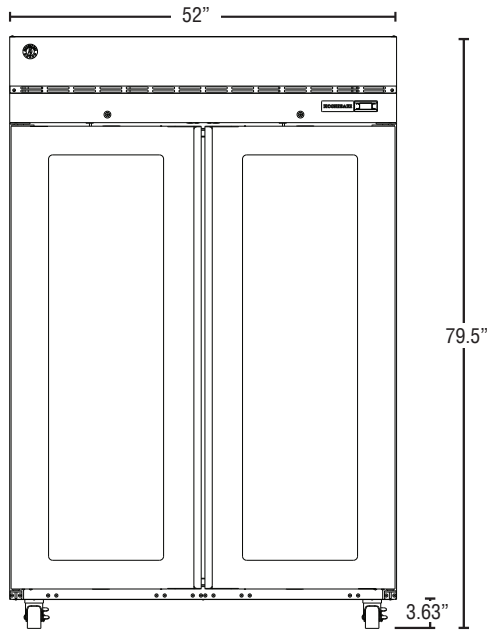

SIDE VIEW

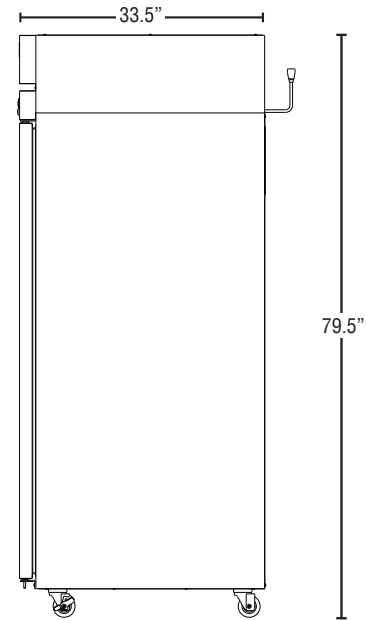

PLAN VIEW

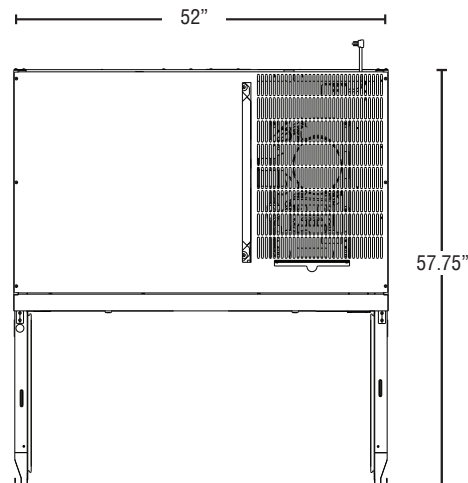

Cabinet Construction

The exterior cabinet front, sides, and top are constructed of high quality stainless steel. The exterior front and sides are constructed of stainless steel and rear, bottom, top is constructed of galvanized steel. The cabinet interior is constructed of stainless steel with a unique ducted air flow system. Three (3) heavy duty epoxy coated shelves per section are standard. Mounted on stainless steel pilasters shelves are adjustable in 1" increments. Cabinet walls and doors are insulated with 2-3/8" of environmentally friendly, CFC free, foamed in place polyurethane. An interior LED light is automatically activated when doors are opened. 4" polyolefin, casters (two with brakes) are standard.

Door Construction

Doors are constructed of a high grade stainless steel exterior with energy-efficient multi-pane, argon filled glass. Locks are standard. Doors are provided with a one piece, full length extruded aluminum flush mount handle and are mounted on eight (8) gauge stainless steel hinge plates with a welded hinge pin. Spring assisted self-closing doors are equipped with a stay open feature past 90 degrees. Snap-in magnetic door gaskets are easily removed for cleaning. Door hinging is field reversible.

Refrigeration System

The high efficiency refrigeration system is self-contained with an epoxy electrocoated (E-Coat) evaporator for extended life. Top mounted refrigeration system is easily accessible for service and includes a condenser filter with easy access from the top of the unit. The refrigeration system components are assembled on a high density expanded polypropylene platform that is removable from the main unit. A unique ducted air flow system achieves uniform air distribution within the cabinet to eliminate hot spots. Condensate removal is accomplished with a top mounted energy efficient non-electric evaporation system. A thermostatic expansion valve (TXV) controls the flow of environmentally friendly R290 refrigerant through the evaporator. Refrigeration system utilizes a time initiated off cycle defrost to eliminate any ice on the evaporator coil. Solid state digital controls monitor the operation and performance of the refrigeration system. The controls also provide visual high and low temperature and high and low voltage alarms. A LED display shows the cabinet temperature and is adjustable to Fahrenheit or Celsius. 115 volt units are equipped with a ten foot cord and plug (20.0 amps or less).