

Thermostatic Mixing Valve with Built-In Check Valve

ROYAL SERIES



Standard Features

- Built-in Check Valves
- Check Valve Filter Screens
- Locking Adjustment Knob to Set Max Temperature
- Preset to 100°F (38°C) Max Temperature


Specifications

Water Inlet	1/2" NPS Male
Water Outlet	1/2" NPS Male
Temp. Range	40°F - 180°F
Outlet Adjustment Range	80°F - 120°F
Default Outlet Temp.	100°F
Pressure	20-120 PSI
Weight	1 lbs.

Model	Description
16-405L	Thermostatic Mixing Valve with Built-in Check Valves

Product Compliance

- ASSE 1070 Certified
- ASME A112.18.1-2018/CSA B125.1-18
- NSF/ANSI 372 & NSF/ANSI/CAN 61

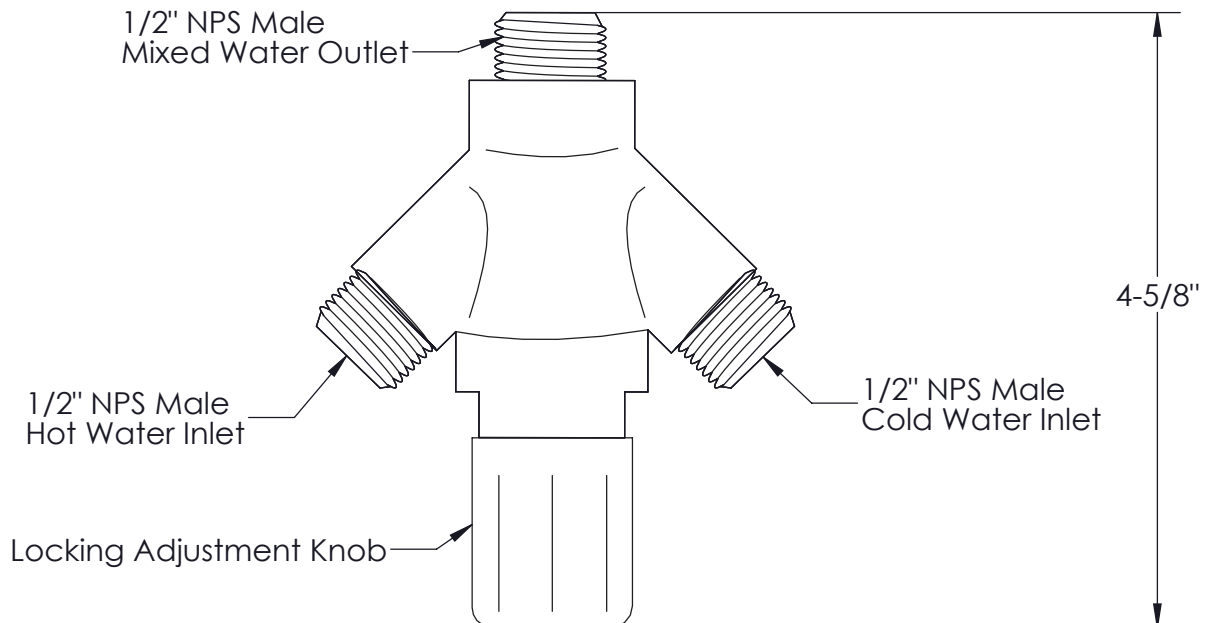

Warning:

Plumbing connections should be made by qualified personnel who will observe all applicable plumbing, sanitary and safety codes

California Prop 65 Warning:

This product can expose you to chemicals including lead and lead compounds, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.cdph.ca