



**Middleby
Marshall®**

X26 Electric Conveyor Oven



Conveyor Width
26"




Cooking Chamber
20"



PRINCIPLE

The X26 Conveyor offers all of the power and technology you would expect from Middleby Marshall, but in a space-saving countertop high-volume design. It produces faster cooking, a smaller footprint, and does not require the energy consumption and higher HVAC needs of larger ovens.

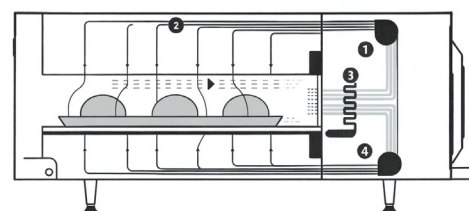

1. Blower motor
2. Impinged air
3. Impingement heater
4. Conveyor motor

STANDARD FEATURES

- 20" cooking chamber, 26" wide belt
- Variable-speed High h recirculating impingement airflow system
- Stackable design up to 2 high (requires stacking kits)
- Variable-speed blower motors
- Easy to clean mono-finger design
- Built-in self diagnostics for monitoring oven components
- Left or right feed conveyor belt direction via software
- Includes plug and cord (6 ft. nominal)
- Two year parts and labor warranty
- Smart voltage sensor technology (U.S. only)
- IoT capability available
- Two (2) 6" conveyor extensions included
- OneTouch Control
- Independently controlled upper and lower air impingement
- Optional Cart Part#: 79590

CERTIFICATIONS



X26

Electric Conveyor Oven

GENERAL SPECIFICATIONS

Wall Clearance

Sides	2"	51 mm
Back	2"	51 mm
Bake Operating Temperature	550°F	288°C
Time Range	56 seconds - 15.5 minutes	


DIMENSIONS

Single Units


Cooking Chamber	20"	508 mm
Heating Zone	26"	660 mm
Baking Area	3.6 ft ²	0.33 m ²
Belt Length	48"	1219 mm
Belt Width	26"	660 mm
Height	17"	432 mm
Depth	40.49"	1028 mm
Overall Length	48.47"	1231 mm
Weight	260 lb.	88.5 kg

Double Stacked Units


Heating Zone	52"	1321 mm
Baking Area	7.2 ft ²	0.67 m ²
Belt Length	48"	1219 mm
Belt Width	26"	660 mm
Height (4.03"/102 mm legs)*	31"	787 mm
Depth	40.49"	1028 mm
Overall Length	48.47"	1231 mm
Weight	520 lb.	177 kg

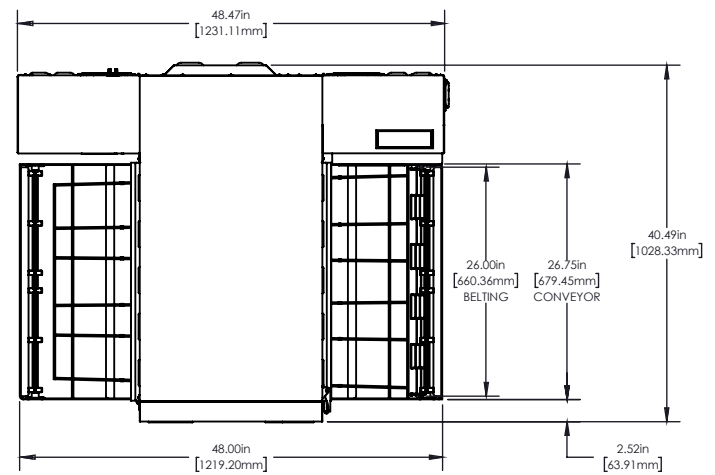

X26 Top View

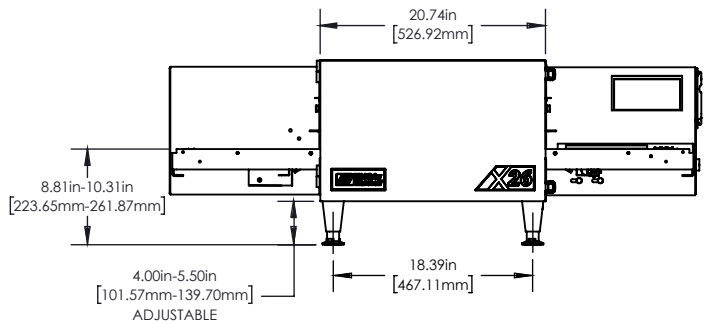



X26 Front View

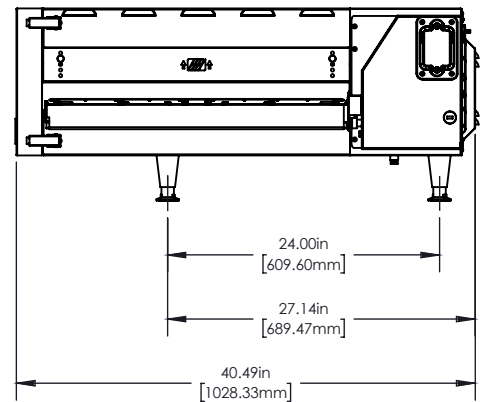


X26 Side View

X26 Rear View

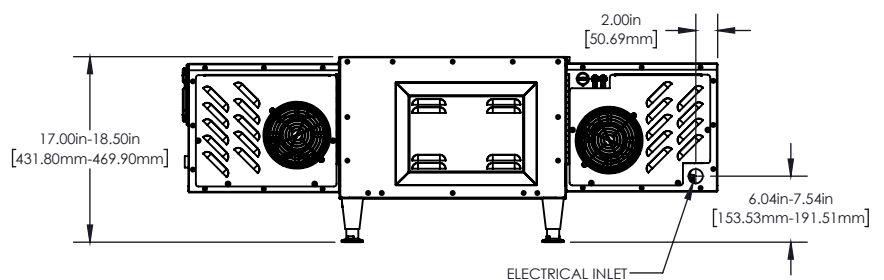


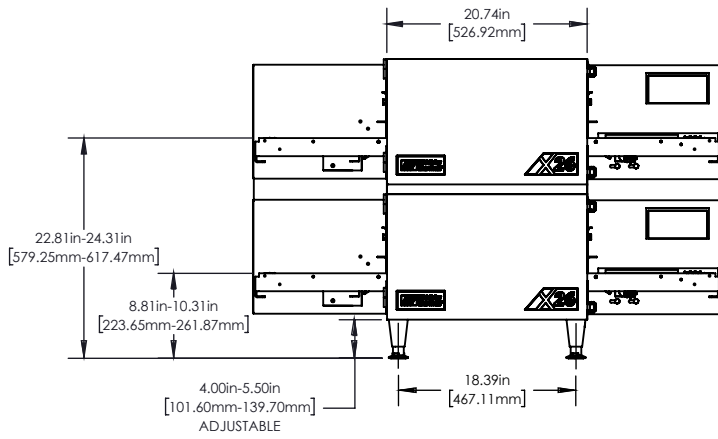

X26 Front View Double Stacked Units

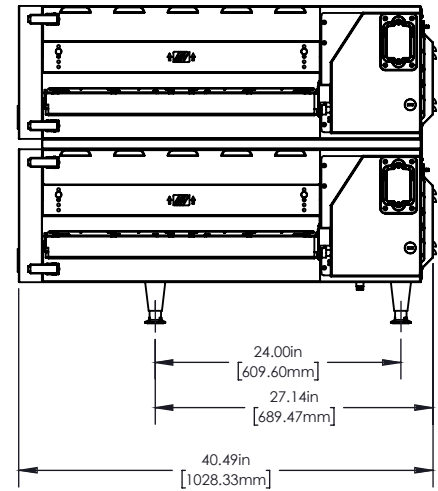

X26 Side View Double Stacked Units





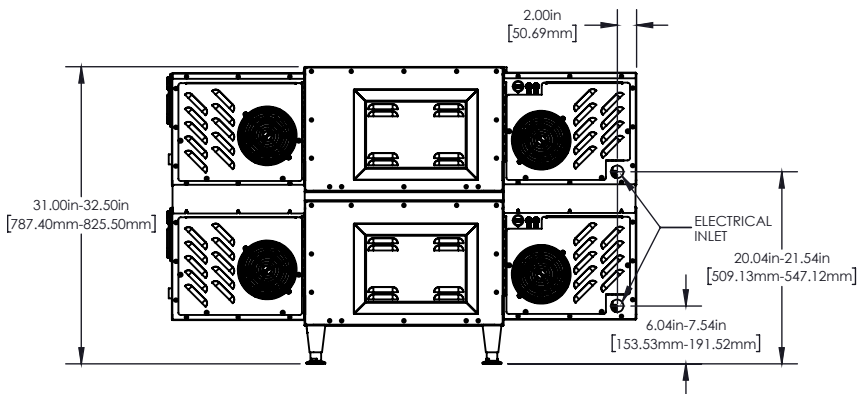


X26 Rear View Double Stacked Units

X26

Electric Conveyor Oven

X26 Electric Conveyor Oven

LOCATION	VOLTAGE	PHASE	FREQUENCY	CURRENT DRAW	SUPPLY	BREAKERS	PLUG
USA [MMC-9500-1]	208/240 V	3	50/60 Hz	40A	4 wire (3L+G)	50A	 NEMA 15-50P
CANADA [MMC-9500-10C]	208/240 V	3	50/60 Hz	40/46A	4 wire (3L+G)	60A	 UL 4 Pin, 60 Amp
EUROPE/ASIA (DELTA) [MMC-9500-2D]	220-240 V	3	50/60 Hz	40A	4 wire (3L+G)	50A	 IEC 4 Pin, 63 Amp
EUROPE/ASIA (WYE) [MMC-9500-3W]	380-415 V	3	50/60 Hz	20A	5-wire (3L + N + G)	32A	 IEC 5 Pin, 32 Amp
AUSTRALIA [MMC-9500-20W]	380-415 V	3	50/60 Hz	20A	5-wire (3L + N + G)	32A	 IEC 5 Pin, 32 Amp

* The current draw rating shown above are maximum values for normal operation, amperage draw will be less than the listed value.