





Your Solutions Partner

Specifications

F.O.B. Sedalia, Missouri 65301

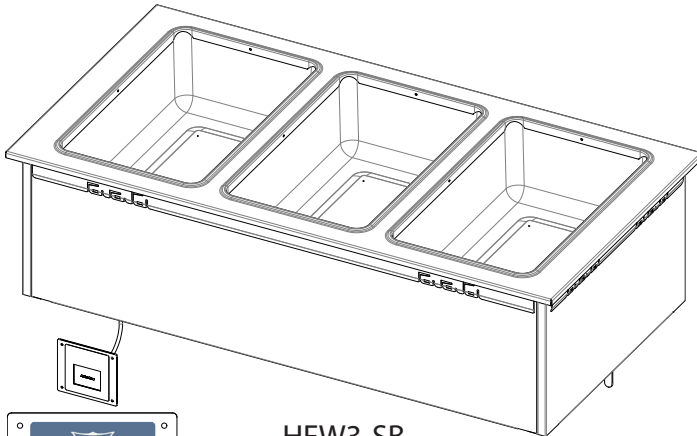

HFW3-SB



OPTIONS:

- ☐ Basic Control with infinite switches in control boxes w/stainless steel face plate. contact factory for details.
- ☐ Hug Edge Top
- ☐ 3 phase power (except HFW1-SB)
- ☐ Individual valves
- ☐ Manifold drains
- ☐ Master valve
- ☐ Designer Foodshields
- ☐ Adapter Plates
- ☐ Adapter Bars

Agency Listings:



DUKE MANUFACTURING CO.

2305 N. Broadway

St. Louis, MO 63102

800.735.3853 Toll Free

314.231.5074 Fax

www.dukemfg.com

SS-1319 Drop In Elec-Sealed Well

Specification subject to change



WARNING For CA residents: go to www.dukemfg.com/prop65 for prop 65 warning

Approval Stamp(s):

PRODUCT INFORMATION:

PROJECT: _____

ITEM: _____

QUANTITY: _____

MODEL:

Drop-Ins - Hot Food Electric - Sealed Well

- | | |
|----------------------------------|--------------------------------|
| ☐ HFW1-SB | 18 1/4"L x 24 1/4"W x 12 3/4"H |
| ☐ HFW2-SB | 32 1/4"L x 24 1/4"W x 12 3/4"H |
| ☐ HFW3-SB | 46 1/4"L x 24 1/4"W x 12 3/4"H |
| ☐ HFW4-SB | 60 1/4"L x 24 1/4"W x 12 3/4"H |
| ☐ HFW5-SB | 74 1/4"L x 24 1/4"W x 12 3/4"H |
| ☐ HFW6-SB | 88 1/4"L x 24 1/4"W x 12 3/4"H |

TOP RIM:

- Heavy gauge, 300 Series stainless steel
- Overhang on front, back and ends w/ 90 degree turn downs and w/ locking tabs
- Die-stamped openings - 11 7/8" x 19 7/8"

HEAT COMPARTMENTS:

- 6-1/2" deep stainless steel liner, wet operation
- Fully insulated
- Sealed element in each compartment
 - ☐ 750 Watt
 - ☐ 900 Watt
 - ☐ 1200 Watt
- Individual open drains


CONTROL PANEL:

- Standard intuitive, easy to use touch screen control
- Easily adjusted presets LOW/MED/HIGH
- Built-in WIFI and Bluetooth for future connectivity.
- UL approved

EXTERIOR HOUSING

- Heavy gauge paint grip steel

Drop-Ins - Hot Food Electric - Sealed Well

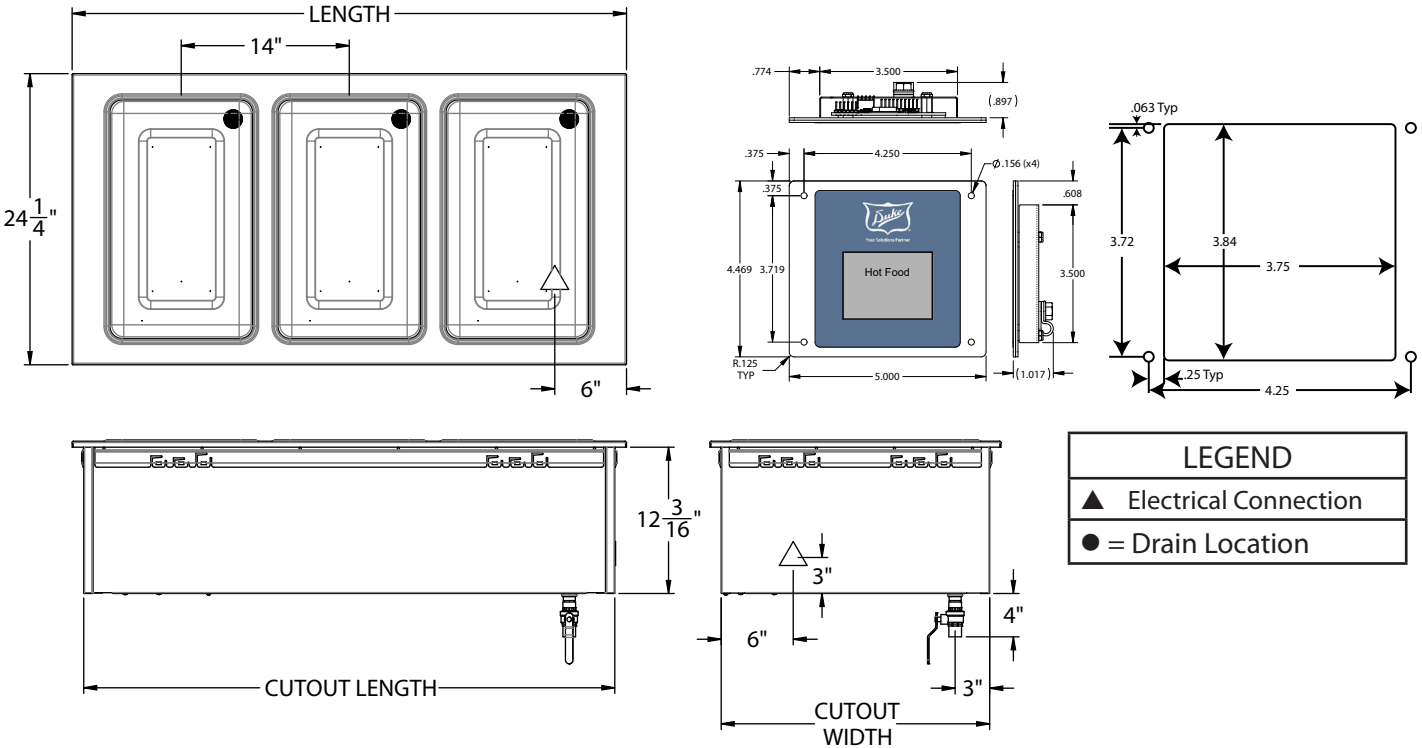

Dimensions:

Freight Class 100

Model	Length		Width		Height		Top Openings	Cutout Width		Cutout Length		Control Panels	Cube ft. Crated	Weight	
	in	cm	in	cm	in	cm		in	cm	in	cm			lbs	kg
HFW1-SB	18 1/4	46.4	24 1/4	61.6	12 3/4	32.4	1	23.125	58.74	17.25	43.82	1	8.2	43	19.6
HFW2-SB	32 1/4	81.9	24 1/4	61.6	12 3/4	32.4	2	23.125	58.74	31.25	79.375	1	13.0	75	34.1
HFW3-SB	46 1/4	117.5	24 1/4	61.6	12 3/4	32.4	3	23.125	58.74	45.25	114.94	1	17.7	90	40.9
HFW4-SB	60 1/4	153.0	24 1/4	61.6	12 3/4	32.4	4	23.125	58.74	59.25	150.50	2	22.5	115	52.3
HFW5-SB	74 1/4	188.6	24 1/4	61.6	12 3/4	32.4	5	23.125	58.74	73.25	186.06	2	27.2	140	63.6
HFW6-SB	88 1/4	224.2	24 1/4	61.6	12 3/4	32.4	6	23.125	58.74	87.25	221.62	2	32.0	220	100.0

Electrical Specifications:

(Consult factory for 3-phase electrical requirements and other options)

Model	120V 750W			208V 750W			208V 900W			240V 750W		
	Watt	Amps	NEMA	Watt	Amps	NEMA	Watt	Amps	NEMA	Watt	Amps	NEMA
HFW1-SB	834	7.0	5-15	834	4.0	6-20	984	4.7	6-20	834	3.5	6-20
HFW2-SB	1584	13.2	L5-30	1584	7.6	6-20	1884	9.1	6-20	1584	6.6	6-20
HFW3-SB	2338	19.5	L5-30	2338	11.2	6-20	2788	13.4	6-20	2338	9.7	6-20
HFW4-SB	3088	25.7	5-50	3088	14.8	6-20	3688	17.7	L6-30	3088	12.9	6-20
HFW5-SB	3842	32.0	5-50	3842	18.5	L6-30	4592	22.1	L6-30	3842	16.0	L6-30
HFW6-SB	N/A			4592	22.1	L6-30	5492	26.4	6-50	N/A		

Model	120V 1200W			208V 1200W			240V 1200W		
	Watt	Amps	NEMA	Watt	Amps	NEMA	Watt	Amps	NEMA
HFW1-SB	1284	10.7	5-15	1284	6.2	6-20	1284	5.4	6-20
HFW2-SB	2484	20.7	L5-30	2484	11.9	6-20	2484	10.4	6-20
HFW3-SB	3688	30.7	5-50	3688	17.7	L6-30	3688	15.4	6-20
HFW4-SB	N/A			4888	23.5	L6-30	4888	20.4	L6-30
HFW5-SB	N/A			6092	29.3	6-50	6092	25.4	6-50
HFW6-SB	N/A			7292	35.1	6-50	7292	30.4	6-50



Duke Manufacturing Co.
2305 N. Broadway
St. Louis, MO 63102

Phone: 314-231-1130
Toll Free: 1-800-735-3853
Fax: 314-231-5074

www.dukemfg.com

Printed in U.S.A.
© 2025, Duke Manufacturing Co.