



PROJECT: _____
ITEM # _____ QTY: _____
MODEL # _____
AIA # _____ SIS # _____

BLAST CHILLER / BLAST FREEZER / THAWING / RETARDER / SLOW COOKER / WARMER

BLAST CHILLER / BLAST FREEZER / THAWING / RETARDER / SLOW COOKER / WARMER

HI5-12-143UL-HC

EXCLUSIVE WARRANTY

- ▶ 3 Year Parts & Labor Warranty
- ▶ 5 Year Compressor Warranty
- ▶ Exclusive 2 Year Warranty On Magnetic Door Gaskets



CABINET CONSTRUCTION

- Stainless Steel Exterior And Interior
- Stay-Open Door Feature For Easy Product Loading
- Snap-In Magnetic Door Gaskets
- 7" Touch Capacitive IPS High Resolution Display
- Circuit Breaker For Compressor Protection
- Automatic Recognition Of Core Probe
- Multi Point Sensor Temperature Display Button
- Core Probe Heater Button
- Infinity Mode Program With Adjustable Set Point
- Automatic Conservation Mode At End Of Cycle

FEATURES

- Multi-Functional Unit Offers 5 Distinct Functions: Blast Chill, Blast Freezing, Thawing, Dough Retarder And Slow Cooking
- LCD Color Display For Precise Control Of Chilling And Cooking Cycles
- Cook/Chill Option With Probe Or Timer Setting
- Shock Freezing
- Core Probe Temperature Or Timed Cycle For Blast Chilling Or Shock Freezing
- HACCP Alarm Display Button
- Pre-Cooling Cycle Button
- Holds 99 Program Memory (68 factory pre-set and up to 31 custom programs)
- USB Data Recorder/Interface

REFRIGERATION

- Self-Contained Refrigeration System Uses R290 Refrigerant
- Hot Gas Condensate Evaporator
- Adjustable Evaporator Fan Speed Button
- Timed Manual Defrost Button
- Temp Range 194°F / 0°F



Please Verify Qualifying Units By Visiting:
www.energystar.gov/cfs

OPTIONS & ACCESSORIES

- Printer Kit
- Removable Sterilizer
- Remote Condensing Unit
- Water Cooled Condenser
- 2" Casters With Brakes

3779 Champion Blvd, Winston-Salem, NC 27105

ph: (888) 845-9800 | fax: (800) 253-5168

Sales@VictoryRefrigeration.com | VictoryRefrigeration.com




Rev. 06/10/26 Printed in U.S.A.

APPROVAL: _____ DATE: _____



BLAST CHILLER / BLAST FREEZER / THAWING / RETARDER / SLOW COOKER / WARMER

HI5-12-143UL-HC

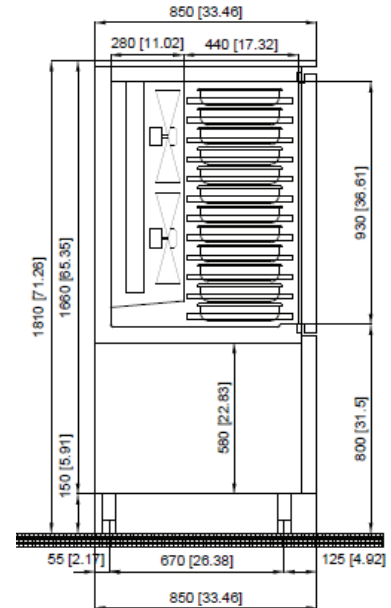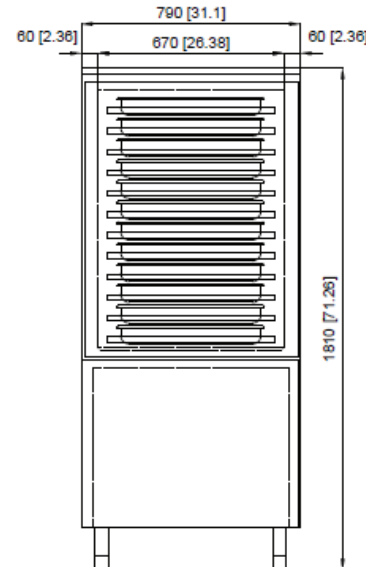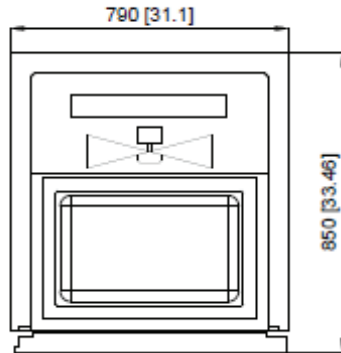

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM)

CHARACTERISTICS		ELECTRICAL DATA		SHIPPING DETAILS	
Net Capacity (cubic ft.)	45.91	Cabinet Voltage	208-240 (3-phase)	Height	78"
Width, Overall (in.)	33.46"	Total Amperes	12.5	Width	37"
Depth, Overall (with handle)	39.37"	NEMA Plug	15-20P	Depth	37"
Height Overall	71.26"	REFRIGERATION DATA		Crated Weight	535 lbs
Depth, Door Open 90°	71.73"	Condensing Unit Size, HP	2	*NOTE: Remote unit are field wired and comes with 6" legs. Refrigerant must be specified at time of order.	
Pan Capacity/Pan Size	12 / 18" x 26"	Refrigerant	R-290		
		Capacity BTU/HR (113°F/-13°F)	7208		
		Capacity BTU/HR (104°F/14°F)	15,252		
		Climate Class	5		

3779 Champion Blvd, Winston-Salem, NC 27105 | ph: (888) 845-9800 | fax: (800) 253-5168

Sales@VictoryRefrigeration.com | VictoryRefrigeration.com

Rev. 6/10/26 Printed in U.S.A.