





Your Solutions Partner

Specifications

F.O.B. Sedalia, Missouri 65301

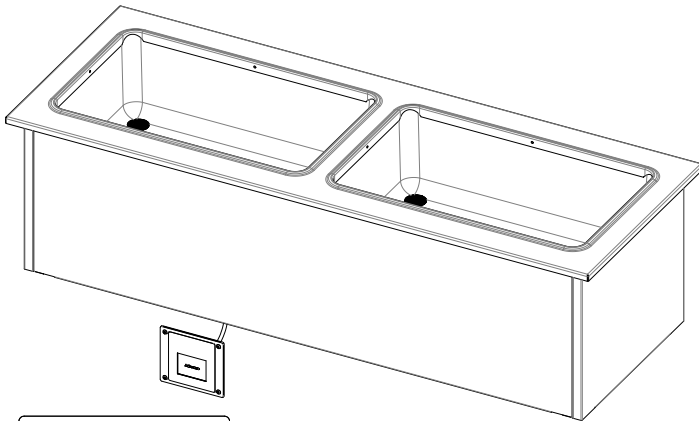

HFW2-SL



OPTIONS:

- ☐ Basic Control with infinite switches in control boxes w/stainless steel face plate, contact factory for details.
- ☐ Hug Edge Top
- ☐ 3 phase Wiring (except HFW1-SL)
- ☐ Individual valves
- ☐ Mainifold drains
- ☐ Master valve
- ☐ Designer Foodshields
- ☐ Adapter Plates
- ☐ Adapter Bars

AGENCY LISTING:



DUKE MANUFACTURING CO.

2305 N. Broadway

St. Louis, MO 63102

800.735.3853 Toll Free

314.231.5074 Fax

www.dukemfg.com

Specification subject to change



Approval Stamp(s):

PRODUCT INFORMATION:

PROJECT: _____

ITEM: _____

QUANTITY: _____

MODEL:

Drop-Ins- Slimline

Hot Food - Electric - Sealed Well

- ☐ **HFW1-SL** 24 1/4"L x 17 1/4"W x 12 3/4"H
- ☐ **HFW2-SL** 46 1/4"L x 17 1/4"W x 12 3/4"H
- ☐ **HFW3-SL** 68 1/4"L x 17 1/4"W x 12 3/4"H

TOP RIM:

- Heavy gauge, 300 Series stainless steel
- Overhang on front, back and ends w/ 90 degree turn downs and w/ locking tabs
- Die-stamped openings - 11 7/8" x 19 7/8"

HEAT COMPARTMENTS:

- 6-1/2" deep stainless steel liner, wet or dry operation
- Fully Insulated
- Sealed Element in each compartment
- ☐ 750 Watt
- ☐ 900 Watt
- ☐ 1200 Watt
- Individual open drains

CONTROL PANEL:

- Standard intuitive, easy to use touch screen control.
- Easily adjusted presets LOW/MED/HIGH.
- Built in WIFI and Bluetooth for future connectivity

EXTERIOR HOUSING






- Heavy gauge paint grip steel

DROP-IN - SLIMLINE - HOT FOOD - ELECTRIC - SEALED WELLS

Catalog No. AHFW-SLIMELECHFSL

A.I.A. File No. 35-C-13

DROP-INS - SLIMLINE HOT FOOD ELECTRIC - SEALED WELL

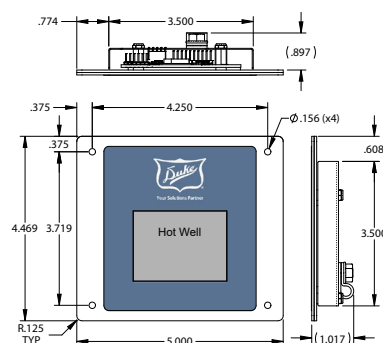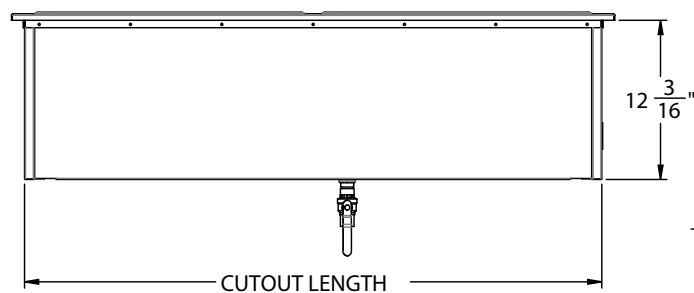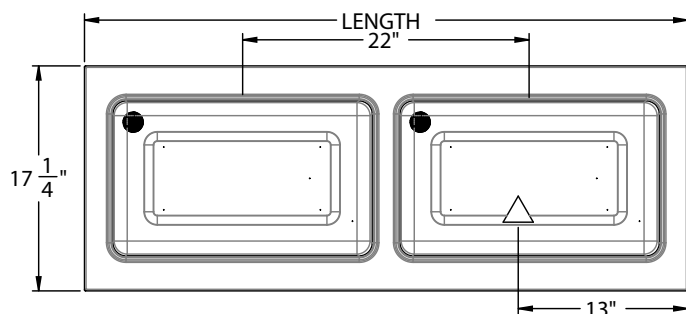

LEGEND

▲ - ELECTRICAL CONNECTION

● - DRAIN CONNECTION

Allow 4" gap between controls and unit

DIMENSIONS:

FREIGHT CLASS: 100

Model	Length		Width		Height		Cutout Length		Cutout Width		Cube ft. crated	Weight	
	in.	cm	in	cm	in	cm	in	cm	in	cm		lbs	kg
HFW1-SL	24 1/4	61.6	17 1/4	43.8	12 3/4	32.4	23	58.4	16	40.6	7.7	80	36.4
HFW2-SL	46 1/4	117.5	17 1/4	43.8	12 3/4	32.4	45	114.3	16	40.6	13.3	135	61.4
HFW3-SL	68 1/4	173.1	17 1/4	43.8	12 3/4	32.4	67	170.2	16	40.6	19.0	185	84.1

Electrical Specifications:

(Consult factory for 3-phase electrical requirements and other options)

Model	120V 750W			208V 750W			208V 900W			240V 750W		
	Watt	Amps	NEMA	Watt	Amps	NEMA	Watt	Amps	NEMA	Watt	Amps	NEMA
HFW1-SL	834	7.0	5-15	834	4.0	6-20	1884	9.1	6-20	834	3.5	6-20
HFW2-SL	1584	13.2	L5-30	1584	7.6	6-20	2788	13.4	6-20	1584	6.6	6-20
HFW3-SL	2338	19.5	L5-30	2338	11.2	6-20	3688	17.7	L6-20	2338	9.7	6-20

Model	120V 1200W			208V 1200W			240V 1200W		
	Watt	Amps	NEMA	Watt	Amps	NEMA	Watt	Amps	NEMA
HFW1-SL	1284	10.7	5-15	1284	6.2	6-20	1284	5.4	6-20
HFW2-SL	2484	20.7	L5-30	2484	11.9	6-20	2484	10.4	6-20
HFW3-SL	3688	30.7	5-50	3688	17.7	L6-30	3688	15.4	6-20



Duke Manufacturing Co.

2305 N. Broadway
St. Louis, MO 63102

Phone: 314-231-1130

Toll Free: 1-800-735-3853

Fax: 314-231-5074

www.dukemfg.com

Printed in U.S.A

© 2025, Duke Manufacturing Co.