


mercoEco®

VISUAL HOLDING CABINETS

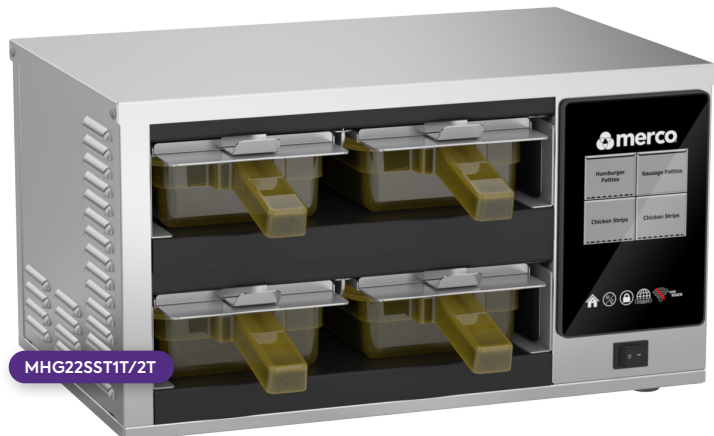

This innovative visual holding unit ensures hot, prepared foods stay at optimum temperature until the moment they're served. With independently time-controlled slots, it accommodates multiple trays while maintaining food quality and safety across a wide range of menu items. The patented tray tracking technology enables touch-free timer activation and monitoring, streamlining kitchen operations. It's the smart solution for consistent, high-quality food.

RADIANT HEAT (TOP & BOTTOM)

Maintains consistent, gentle heat ideal for preserving both crispy and juicy food textures.

TRAY TRACKING TECHNOLOGY PATENTED

- Automatically starts timers without button pushes.
- Transfer timers move with the tray when it is transferred between cabinets or shelves.
- Automatic alerts notify operators if a tray is placed in the wrong location.

7" TOUCHSCREEN INTERFACE

Visual status indicators, swipe navigation, and easy programming via USB or Wi-Fi with KitchenConnect.

FLEXIBLE TRAY SEALS

Removable stainless-steel tray seals lock in moisture when needed or can be removed to preserve crispiness.

MODULAR, PASS-THRU READY

Durable stainless-steel construction with single or double-sided configurations and removable back panel for pass-thru use.

1/3 SIZE, 2.5" DEEP TRAY COMPATIBILITY

Designed to hold 1/3 size, 2.5" deep, high-heat plastic FLEX trays.

Project _____
 Item _____
 Quantity _____ CSI Section 11400 _____
 Approval _____ Date _____

MODELS

- ☐ MHG22SST1T/2T
- ☐ MHG23SST1T/2T
- ☐ MHG24SST1T/2T
- ☐ MHG32SST1T/2T
- ☐ MHG34SST1T/2T
- ☐ MHG42SST1T/2T

ACCESSORIES

- ☐ 1/3 size, 2.5" deep, single handle FLEX tray
PN 130376335
- ☐ 1/3 size, solid tray seal
PN 2601683
- ☐ 1/3 size, vented tray seal
PN 130212608
- ☐ 1/3 size, stainless steel trivet
PN 8030495

SPECIFICATIONS

CONTROLLER	• 7" capacitive RIGHT SIDE PORTRAIT touchscreen with swipe functionality • Color-coded product cell indicators for easy visual monitoring • On-screen programming or USB updates using MenuConnect® • Wireless connectivity with KitchenConnect for remote monitoring and recipe uploads • Multiple language options and customizable food names
TECHNOLOGY	• Radiant heat above and below each tray zone for consistent temperature control • Adjustable temperature per zone (90–225 °F / 32–107 °C) • Visual hold indicators and audible alerts for precise food management • Compatible with removable stainless steel tray seals to customize moisture retention • Wi-Fi enabled for smart kitchen integration and data access
CONSTRUCTION	• Heavy-duty stainless steel body built for commercial durability • Pass-thru ready with removable back panel • Compatible with 1/3 size, 2.5" deep, single handle, high-heat plastic FLEX trays • (1W) suffix indicates a single touchscreen UI and a finished back • (2W) suffix indicates a touchscreen on both sides, no back for dual service • Includes 6-ft. power cord



REVISED SUMMER 2026




Sales: 1-800-221-4583
 Service: 1-877-392-7770
MercoCustServ@mercoproducts.com

8700 Line Avenue
 Shreveport, LA 71106-6800, USA
MERCOPRODUCTS.COM



mercoEco[®]

VISUAL HOLDING CABINETS

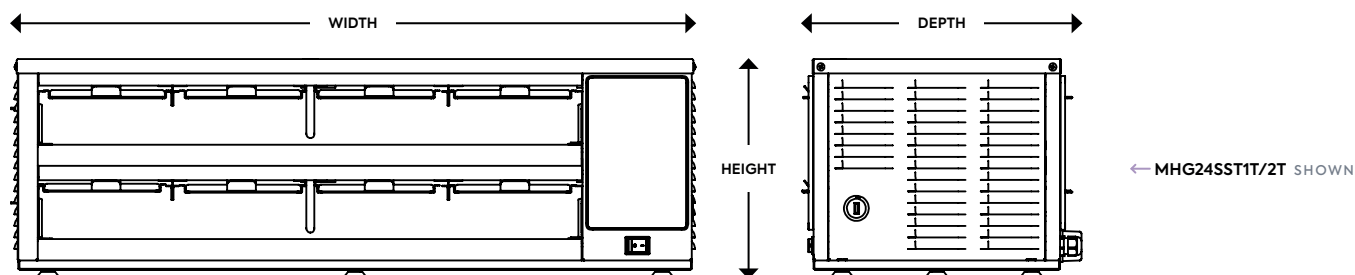

	MODEL		ACCESS	CONTROLLERS	LAYOUT	TRAYS
LAYOUT	MHG22SST	1T	Single-sided	(1) Touchscreen	2 tall × 2 wide	(4) 1/3 size 2.5" deep single handle flex trays
		2T	Double-sided	(2) Touchscreens		
	MHG23SST	1T	Single-sided	(1) Touchscreen	2 tall × 3 wide	(6) 1/3 size 2.5" deep single handle flex trays
		2T	Double-sided	(2) Touchscreens		
	MHG24SST	1T	Single-sided	(1) Touchscreen	2 tall × 4 wide	(8) 1/3 size 2.5" deep single handle flex trays
		2T	Double-sided	(2) Touchscreens		
	MHG32SST	1T	Single-sided	(1) Touchscreen	3 tall × 2 wide	(6) 1/3 size 2.5" deep single handle flex trays
		2T	Double-sided	(2) Touchscreens		
	MHG34SST	1T	Single-sided	(1) Touchscreen	4 tall × 2 wide	(12) 1/3 size 2.5" deep single handle flex trays
		2T	Double-sided	(2) Touchscreens		
	MHG42SST	1T	Single-sided	(1) Touchscreen	4 tall × 2 wide	(8) 1/3 size 2.5" deep single handle flex trays
		2T	Double-sided	(2) Touchscreens		

DIMENSIONS	MODEL	WIDTH	DEPTH	HEIGHT	SHIPPING WEIGHT
	MHG22SST1T/2T	20.7" (52.6 cm)	14.7" (37.3 cm)	11.4" (29 cm)	67-lbs. (30.4 kg)
	MHG23SST1T/2T	28" (71.1 cm)	14.7" (37.3 cm)	11.4" (29 cm)	93-lbs. (42.2 kg)
	MHG24SST1T/2T	35.5" (90.2 cm)	14.7" (37.3 cm)	11.4" (29 cm)	127-lbs. (57.7 kg)
	MHG32SST1T/2T	20.7" (52.6 cm)	14.7" (37.3 cm)	16.4" (41.7 cm)	87-lbs. (39.5 kg)
	MHG34SST1T/2T	35.5" (90.2 cm)	14.7" (37.3 cm)	16.4" (41.7 cm)	112-lbs. (50.8 kg)
	MHG42SST1T/2T	20.7" (52.6 cm)	14.7" (37.3 cm)	21.3" (54.1 cm)	151-lbs. (68.6 kg)

POWER	MODEL		VOLTS (V)	AMPS (A)	WATTS (W)	HERTZ (Hz)	PLUG
	(X) MHG22SST1T/2T	DOMESTIC	120	6.7	800	60	5-15P
		EXPORT (X)	200 - 240	3.1 - 3.7	605 - 872	50 60	CEE 7/7
	(X) MHG23SST1T/2T	DOMESTIC	120	10	1200	60	5-15P
		EXPORT (X)	200 - 240	4.6 - 5.5	908 - 1307	50 60	CEE 7/7
	(X) MHG24SST1T/2T	DOMESTIC	120	13.4	1600	60	5-20P
		EXPORT (X)	200 - 240	6.1 - 7.3	1210 - 1743	50 60	CEE 7/7
	(X) MHG32SST1T/2T	DOMESTIC	120	10	1200	60	5-15P
		EXPORT (X)	200 - 240	4.6 - 5.5	908 - 1307	50 60	CEE 7/7
	(X) MHG34SST1T/2T	DOMESTIC	208 240	9.5 10.9	1963 2614	60	6-20P
		EXPORT (X)	200 - 240	9.1 - 10.9	1815 - 2614	50 60	CEE 7/7
	(X) MHG42SST1T/2T	DOMESTIC	120	13.4	1600	60	5-15P
		EXPORT (X)	200 - 240	6.1 - 7.3	1210 - 1743	50 60	CEE 7/7

CLEARANCE INFORMATION

1.0" (25 mm) clearance on all sides is required. Maximum 50-lb. can be placed on top of any unit.

DOMESTIC WARRANTY

Cabinet - 1 year: Parts + Labor

Merco reserves the right to make changes to the design or specifications without prior notice.

REVISED SUMMER 2026



Sales: 1-800-221-4583
Service: 1-877-392-7770
MercoCustServ@mercoproducts.com

8700 Line Avenue
Shreveport, LA 71106-6800, USA
MERCOPRODUCTS.COM

