

PIZZA PREP

KIN44PP-HC KIN67PP-HC KIN91PP-HC



KIN44PP-HC



KIN67PP-HC



KIN91PP-HC


FEATURES:

- R290 refrigerant and foam insulation
- Electronic thermostat and digital LED temperature display for accurate control and easy reading
- Easy to mount 4" casters (lockable in front) are standard with all units
- Self-closing doors that remain open at 90 degrees
- Magnetic gasket can be replaced without any tools
- Adjustable, heavy-duty epoxy coated wire shelves (one per door)
- Removable installation board makes it easy to access condenser coil for cleaning and service
- Stainless steel framework construction
- Auto defrosting and auto evaporation of condensation water
- Cutting boards and pans are included
- Exterior: 430 stainless steel, Interior: 201 stainless steel, Interior floor: 304 stainless steel
- Temperature: 33 to 40°F / 0.5 to 4°C


PIZZA PREP

KIN44PP-HC KIN67PP-HC KIN91PP-HC


KIN44PP-HC



ELEVATION




PLAN

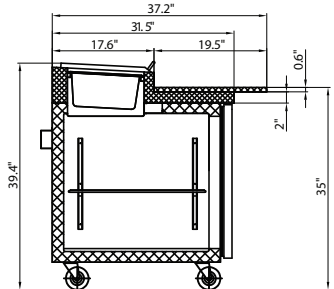


SECTION VIEW


KIN67PP-HC

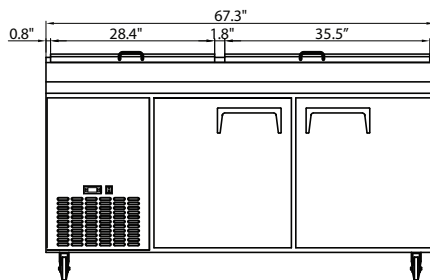

ELEVATION

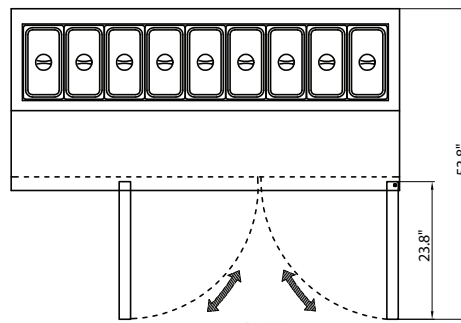


PLAN

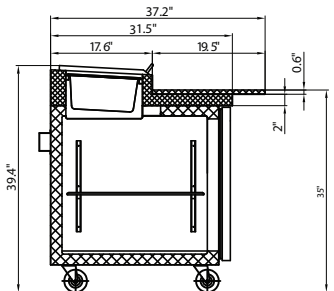


SECTION VIEW


KIN91PP-HC

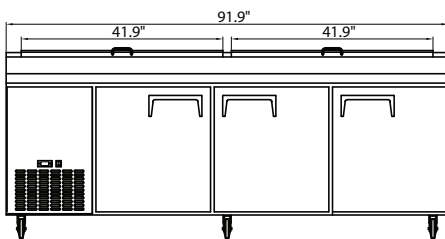

ELEVATION

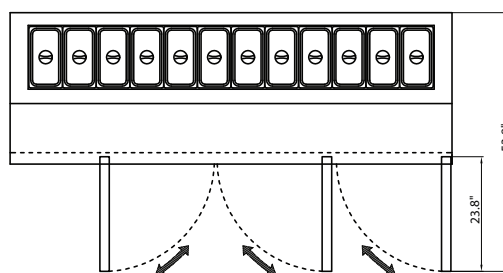

PLAN

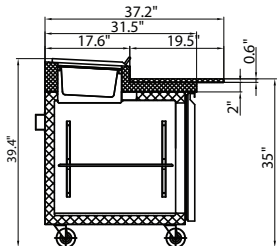

SECTION VIEW

Model	Doors	Shelf	Pans	Thickness cutting board	Exterior Dimensions (In)	Interior Dimensions (In)	Voltage	Amps	Compressor Size (HP)	Shipping WT (Lbs)	Caster
KIN44PP-HC	1	1	1/3 PANS 6pcs	0.6"	44.5"x 31.5"x 39.4"	22.3"x 27.2"x 22.9"	115/60 Hz	3.5	1/5	286	4"
KIN67PP-HC	2	1	1/3 PANS 9pcs	0.6"	69.3"x 31.5"x 39.4"	45"x 27.2"x 22.9"	115/60 Hz	4.8	1/3	354	4"
KIN91PP-HC	3	1	1/3 PANS 12pcs	0.6"	91.9"x 31.5"x 39.4"	69.6"x 27.2"x 22.9"	115/60 Hz	6.6	3/7	609	4"