

4CLM⁺-S FILTER CARTRIDGE

Part Number:
EV973350 1 PK



CARTRIDGE DESCRIPTION

Enhance beverage quality and help protect foodservice equipment with the **Everpure 4CLM⁺-S** water filtration cartridge. Engineered for coffee and combi oven applications, it reduces chloramines, chlorine, tastes & odors, limescale*, and sediment to help deliver consistent beverage quality while supporting equipment performance and longevity. Certified chloramine and chlorine reduction up to 4,000 gallons at a flow rate of 1.25 gpm.

APPLICATIONS

- ◆ Coffee
- ◆ Combi ovens

FEATURES • BENEFITS

- ◆ High-performance, catalytic carbon block technology is engineered to reduce chloramines
- ◆ Patent-pending phosphate release technology engineered for consistent scale* protection
- ◆ Reduces particulates, tastes & odors, chloramines, and chlorine that can adversely affect the taste of beverages
- ◆ Compatible with QC7I, Coldrink®, and High Flow CSR heads
- ◆ Effectively filters dirt and particles as small as 5 microns in size
- ◆ Easy, sanitary, quick-change filter replacement
- ◆ NSF/ANSI Standard 42 certified for the reduction of Chloramines, Chlorine, Taste & Odor, and Particulate Class III


INSTALLATION TIPS

- ◆ Always flush the cartridge at time of installation and cartridge change.
- ◆ Do not exceed cartridge specifications for temperature and pressure.
- ◆ For more details, see the installation and operation guide included with your Everpure system.

* As tested by Pentair.

4CLM+-S FILTER CARTRIDGE

EV973350

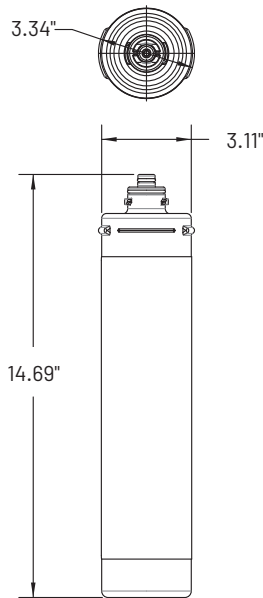

SPECIFICATIONS

System	Performance
Overall Dimensions 14.69" L x 3.34" dia (37.31 x 8.48 cm)	Service Flow Rate - Maximum 1.25 gpm (4.73 Lpm)
Operating Pressure (non-shock) 10 – 125 psi (0.7 – 8.6 bar)	Rated Capacity Chloramines 4,000 gallons (15,141.65 L) 10,000 gallons (37,854.12 L)*
Water Temperature 35 – 100°F (2 – 38°C)	Rated Capacity Chlorine 4,000 gallons (15,141.65 L) 10,000 gallons (37,854.12 L)*
Shipping Weight 2.04 lbs (0.93 kgs)	Chloramines Reduction Yes
Electrical Connection None required	Chlorine Reduction Yes
	Taste & Odor Reduction Yes
	Particulate Reduction Yes
	Limescale Reduction Yes†

*As tested by Pentair at a flow rate of 0.5 gpm. (1.89 Lpm)

†As tested by Pentair.

For Pentair Everpure Product Warranties visit:
<http://pentair.com/assets/foodservice-warranty>.
To receive a free copy email or call your Pentair representative using the information provided below.

PRIMARY FILTER FOR THE FOLLOWING SYSTEMS

Model	Qty	Part No
QC7i Single 4CLM+-S	1	EV979970

Replace all filter cartridges every six (6) months as part of a regular scheduled program and no less than once per year. In multiple-cartridge systems, all primary quick-change cartridges must be replaced simultaneously.

The substances reduced by this drinking water device are not necessarily in your water.

Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.



System Tested and Certified by NSF International against ASSE/ANSI 1087 and NSF/ANSI Standard 42 for the reduction of:

STANDARD NO. 42 –
AESTHETIC EFFECTS

Chemical Reduction
Taste & Odor
Chloramine
Chlorine

Mechanical Filtration
Nominal Particulate Class III