

Salad and Sandwich Refrigerated Prep Table






Features




- CFC free refrigerant and foam insulation
- Electronic thermostat and digital LED temperature display for accurate control and easy reading
- Self-closing swing door
- Air outlet designed to promote uniform interior temperature within the cabinet
- The coated copper tube, boasting a sturdy 0.7mm thickness, ensures durability.
- Crafted from a single bent tube, minimizing the risk of leaks with only two welding joints. The condenser is efficiently positioned inside the condensation pan to facilitate the evaporation of excess water.
- INTERIOR: 304 Stainless Steel
- EXTERIOR: 430 Stainless Steel
- Dispose of daily waste effortlessly with the stainless steel baseplate lifts easily
- Adjustable and heavy-duty epoxy-coated wire shelves for flexible storage options
- 1/6 size polycarbonate GN pan and 11" (279 mm) plastic cutting board included
- Easy to mount 4" casters (front casters with brakes) are standard with all units
- Interior temperature range: 1°C to 4°C (33°F to 40°F)
- Electrical specifications: 115/60/1 with a NEMA 5-15P plug and a 10ft cord
- SGS & SGS Sanitation Certificate
- R-290 refrigerant

Model	Doors	1/6 Size Pan Capacity	Exterior Dimensions (W x D x H)	Shelves	Voltage (V/Hz/Ph)	Amps	Power	NEMA PLUG	N.W	G.W	Packing Size (W x D x H)
KK-CSSU-29	1 Door	8	736 x 812 x 905 or 1079 mm 29.00 x 32.00 x 35.62 or 42.50"	2	115/60/1	3	300 W 0.41HP	5-15P	70 kg 155 lbs	101 kg 223 lbs	816 x 855 x 1145 mm 32.12 x 33.50 x 45.00"
KK-CSSU-36	2 Doors	10	920 x 812 x 905 or 1079 mm 36.25 x 32.00 x 35.62 or 42.50"	4	115/60/1	3	300 W 0.41HP	5-15P	79.5 kg 175 lbs	110 kg 243 lbs	1001 x 855 x 1145 mm 39.50 x 33.50 x 45.00"
KK-CSSU-48	2 Doors	12	1227 x 812 x 905 or 1079 mm 48.25 x 32.00 x 35.62 or 42.50"	4	115/60/1	4	400 W 0.54 HP	5-15P	100 kg 220 lbs	130 kg 286 lbs	1306 x 855 x 1145 mm 51.50 x 33.50 x 45.00"
KK-CSSU-60	2 Doors	16	1526 x 812 x 905 or 1079 mm 60.00 x 32.00 x 35.62 or 42.50"	4	115/60/1	4	400 W 0.54 HP	5-15P	119 kg 262 lbs	178 kg 392 lbs	1636 x 855 x 1145 mm 65.00 x 33.50 x 45.00"
KK-CSSU-72	3 Doors	20	1824 x 812 x 905 or 1079 mm 71.88 x 32.00 x 35.62 or 42.50"	6	115/60/1	4.5	450 W 0.61 HP	5-15P	164 kg 360 lbs	206 kg 454 lbs	1904 x 855 x 1145 mm 75.00 x 33.50 x 45.00"

KK-CSSU-29

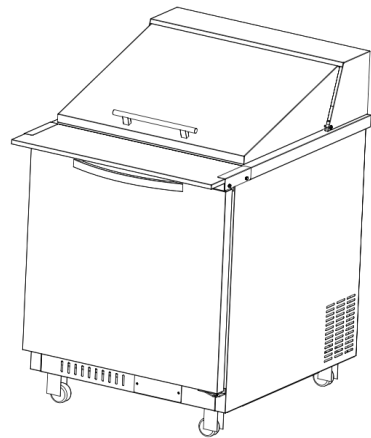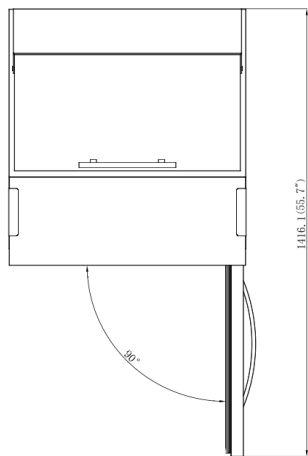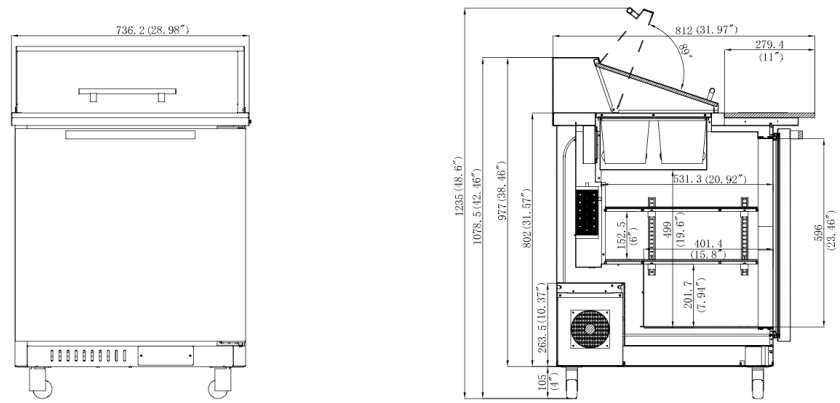


KK-CSSU-36

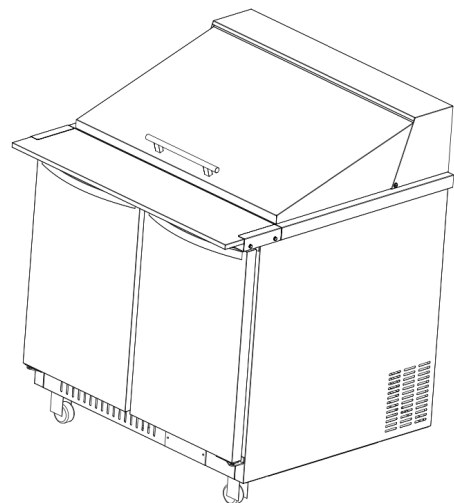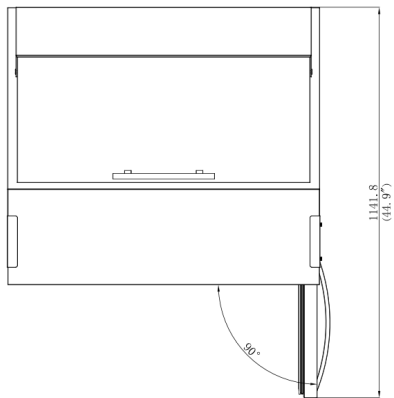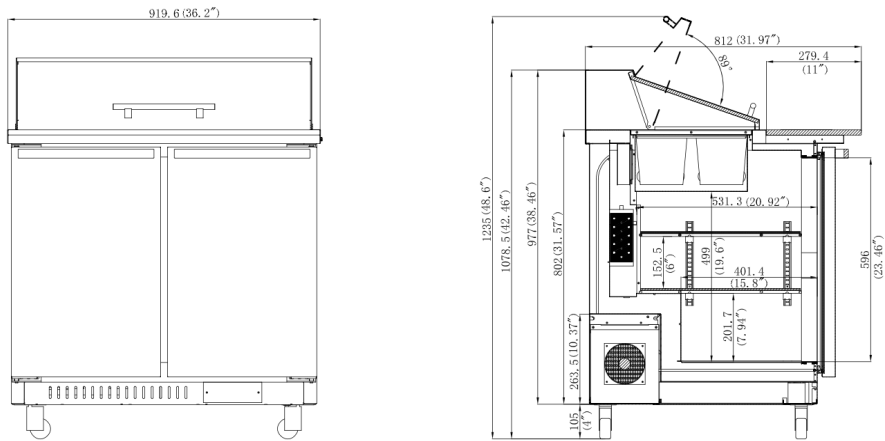


If the data and structure update, without notice, subject to material object.





KK-CSSU-48

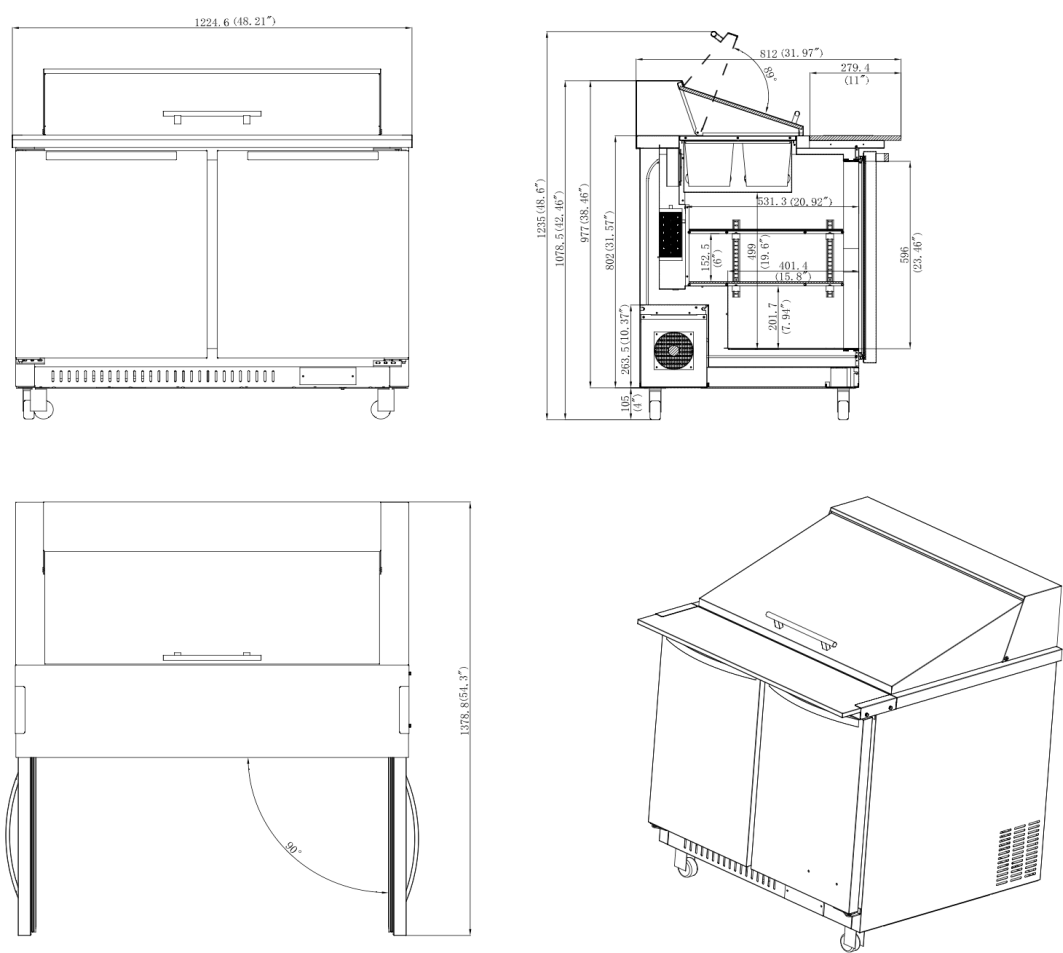

KK-CSSU-60

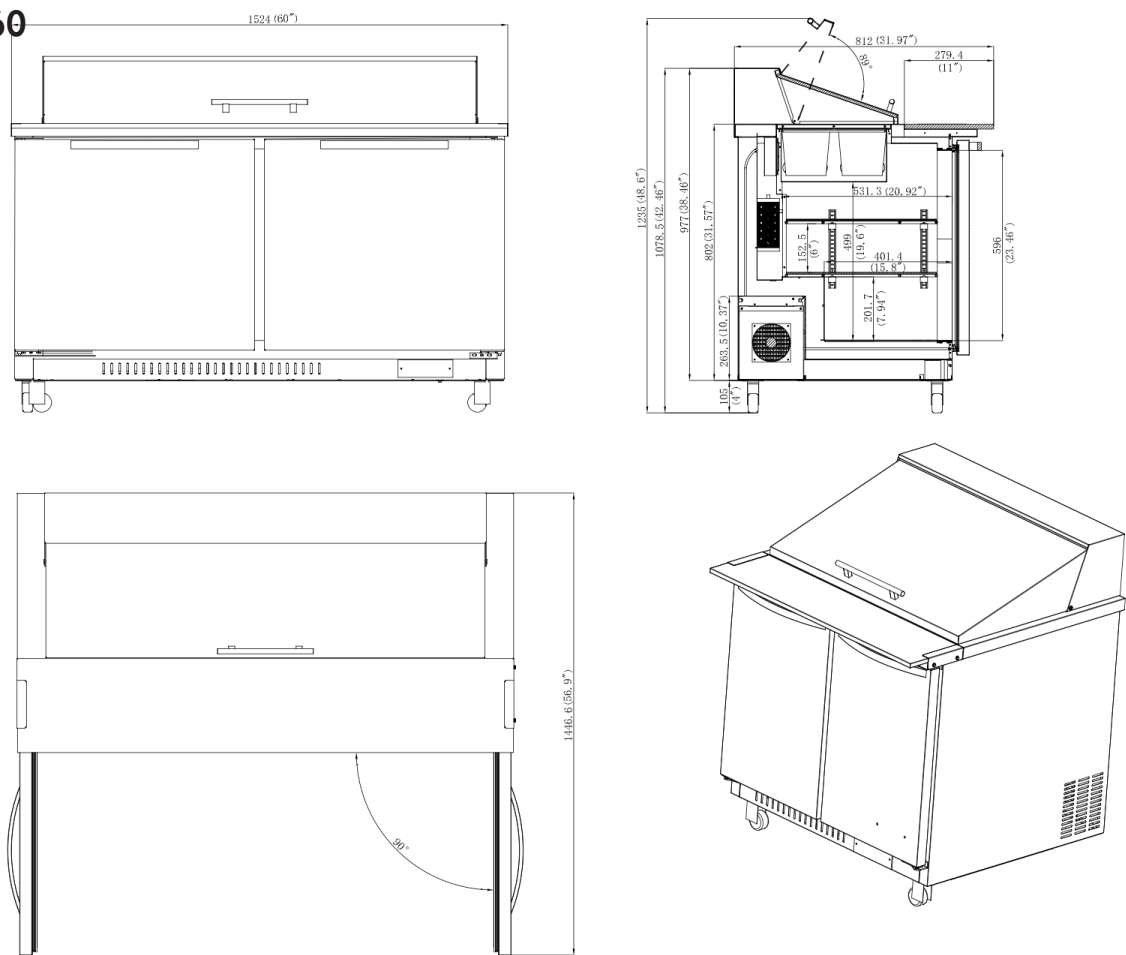

KK-CSSU-72

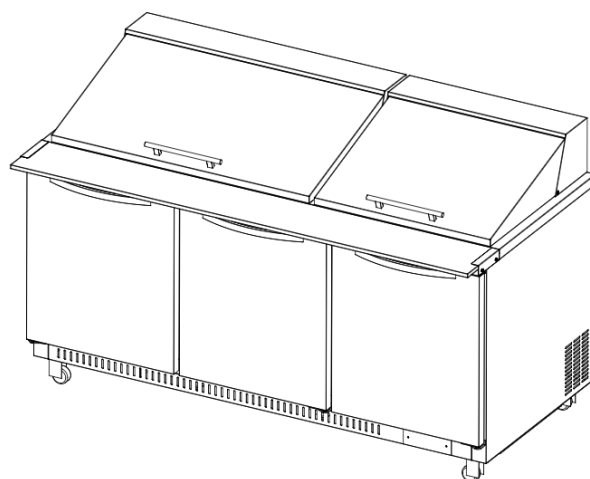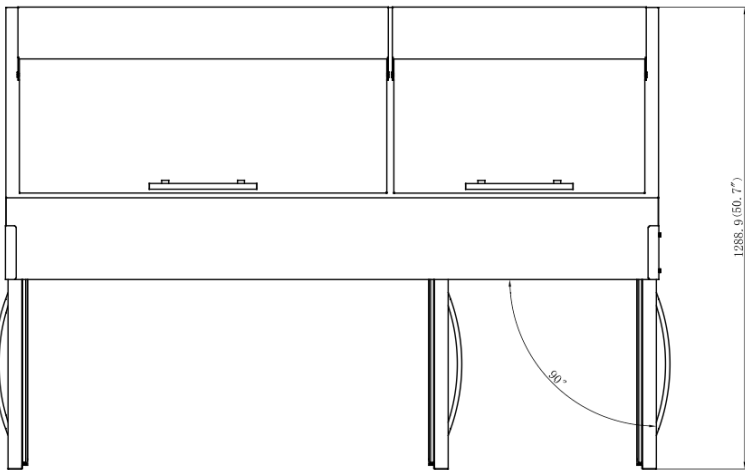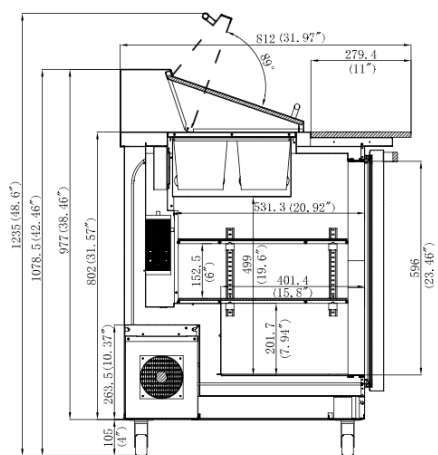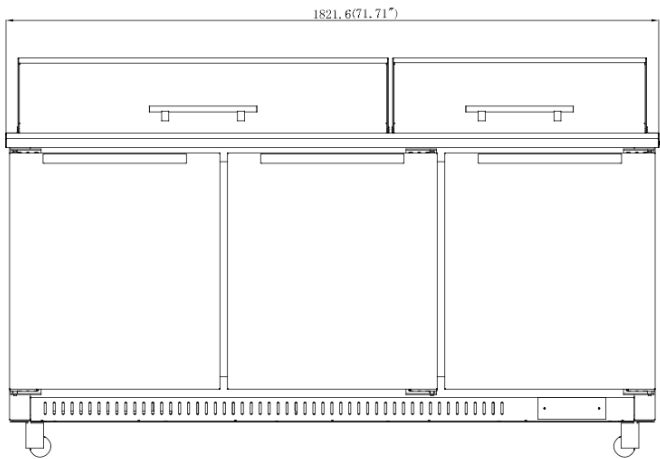

If the data and structure update, without notice, subject to material object.