




# Stainless Steel Solid Door Reach-In Refrigerator






## Features

- CFC free refrigerant and foam insulation
  - Electronic thermostat and digital LED temperature display for accurate control and easy reading
  - Self-closing door
  - Air outlet designed to promote uniform interior temperature within the cabinet
  - The coated copper tube, boasting a sturdy 0.7mm thickness, ensures durability
  - Crafted from a single bent tube, minimizing the risk of leaks with only two welding joints
  - The condenser is efficiently positioned inside the condensation pan to facilitate the evaporation of excess water
  - INTERIOR: 304 stainless steel. EXTERIOR: 430 stainless steel
  - Adjustable and heavy-duty epoxy-coated wire shelves for flexible storage options
  - Easy to mount 4" casters (front casters with brakes) are standard with all units
  - Electrical specifications: 115/60/1 with a NEMA 5-15P plug and a 10ft cord
  - SGS & SGS Sanitation Certificate
  - R-290 refrigerant
- Interior temperature range: 1°C to 4°C ( 33°F to 40°F)



| Model   | Doors                   | Exterior Dimensions<br>(W x D x H)             | Shelves | Voltage<br>(V/Hz/Ph) | Amps | Power            | NEMA<br>PLUG | N.W               | G.W               | Packing Size<br>(W x D x H)                    |
|---------|-------------------------|------------------------------------------------|---------|----------------------|------|------------------|--------------|-------------------|-------------------|------------------------------------------------|
| KK-19BR | Refrigerator<br>1 Door  | 680 × 662 × 2053 mm<br>26.77 × 26.06 × 80.83"  | 4       | 115/60/1             | 5    | 500 W<br>0.68 HP | 5-15P        | 128 kg<br>282 lbs | 142 kg<br>312 lbs | 740 × 720 × 2253 mm<br>29.13 × 28.35 × 88.74"  |
| KK-27BR | Refrigerator<br>1 Door  | 680 × 818 × 2053 mm<br>26.77 × 32.20 × 80.83"  | 4       | 115/60/1             | 5    | 500 W<br>0.68 HP | 5-15P        | 132 kg<br>290 lbs | 153 kg<br>337 lbs | 740 × 890 × 2253 mm<br>29.13 × 35.04 × 88.74"  |
| KK-35BR | Refrigerator<br>2 Doors | 1003 × 818 × 2053 mm<br>39.49 × 32.20 × 80.83" | 8       | 115/60/1             | 6.5  | 650 W<br>0.88 HP | 5-15P        | 175 kg<br>385 lbs | 207 kg<br>455 lbs | 1063 × 890 × 2253 mm<br>41.85 × 35.04 × 88.74" |
| KK-48BR | Refrigerator<br>2 Doors | 1220 × 818 × 2053 mm<br>48.03 × 32.20 × 80.83" | 8       | 115/60/1             | 7.5  | 800 W<br>1.09 HP | 5-15P        | 189 kg<br>416 lbs | 230kg<br>507 lbs  | 1280 × 890 × 2253 mm<br>50.39 × 35.04 × 88.74" |
| KK-54BR | Refrigerator<br>2 Doors | 1370 × 818 × 2053 mm<br>53.94 × 32.20 × 80.83" | 8       | 115/60/1             | 7.5  | 800 W<br>1.09 HP | 5-15P        | 226 kg<br>497 lbs | 261 kg<br>575 lbs | 1430 × 890 × 2253 mm<br>56.30 × 35.04 × 88.74" |
| KK-81BR | Refrigerator<br>3 Doors | 2050 × 818 × 2053 mm<br>80.71 × 32.20 × 80.83" | 12      | 115/60/1             | 8.5  | 900W<br>1.22 HP  | 5-15P        | 318 kg<br>700 lbs | 349 kg<br>768 lbs | 2110 × 890 × 2253 mm<br>83.07 × 35.04 × 88.74" |

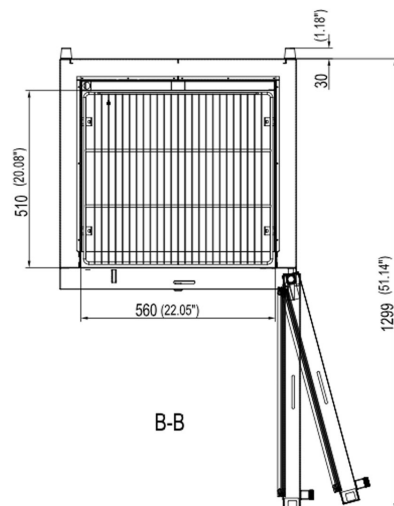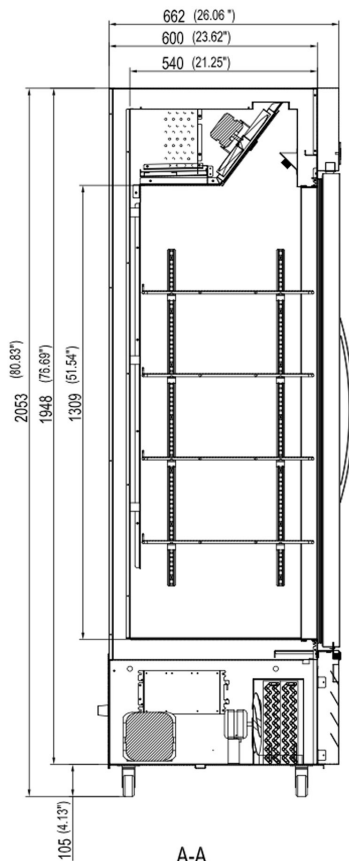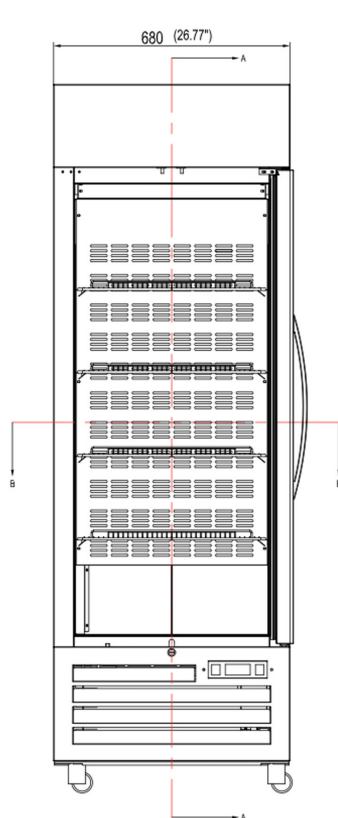



**KK-19BR**

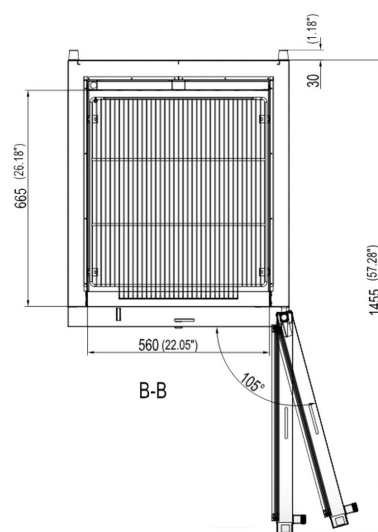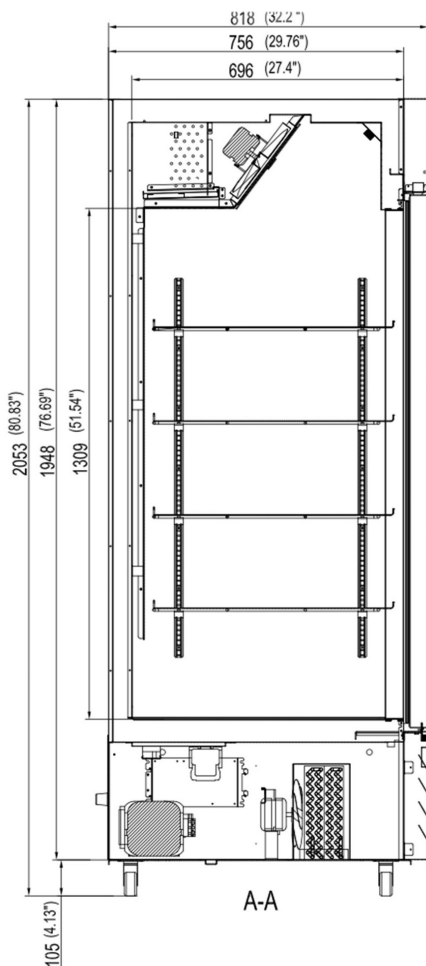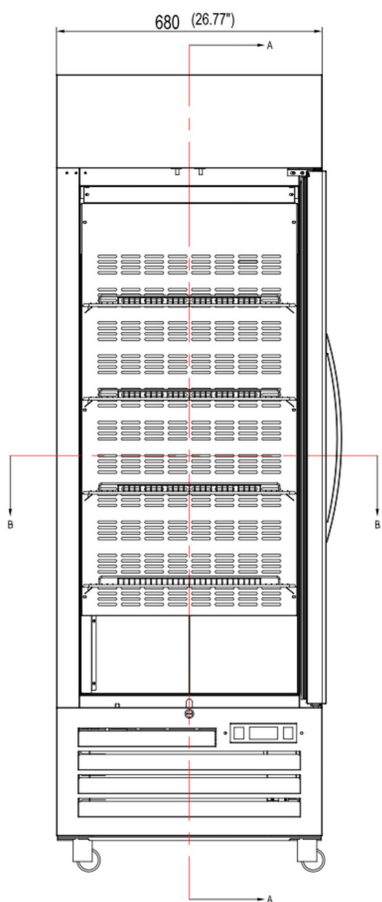

**KK-27BR**

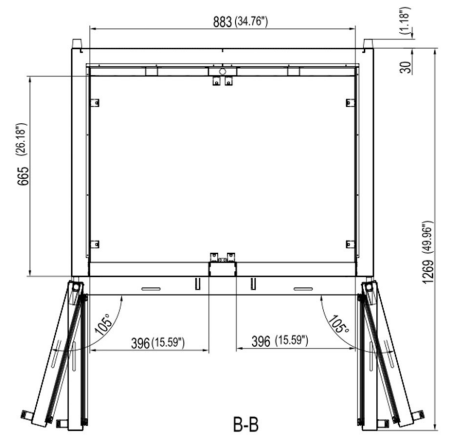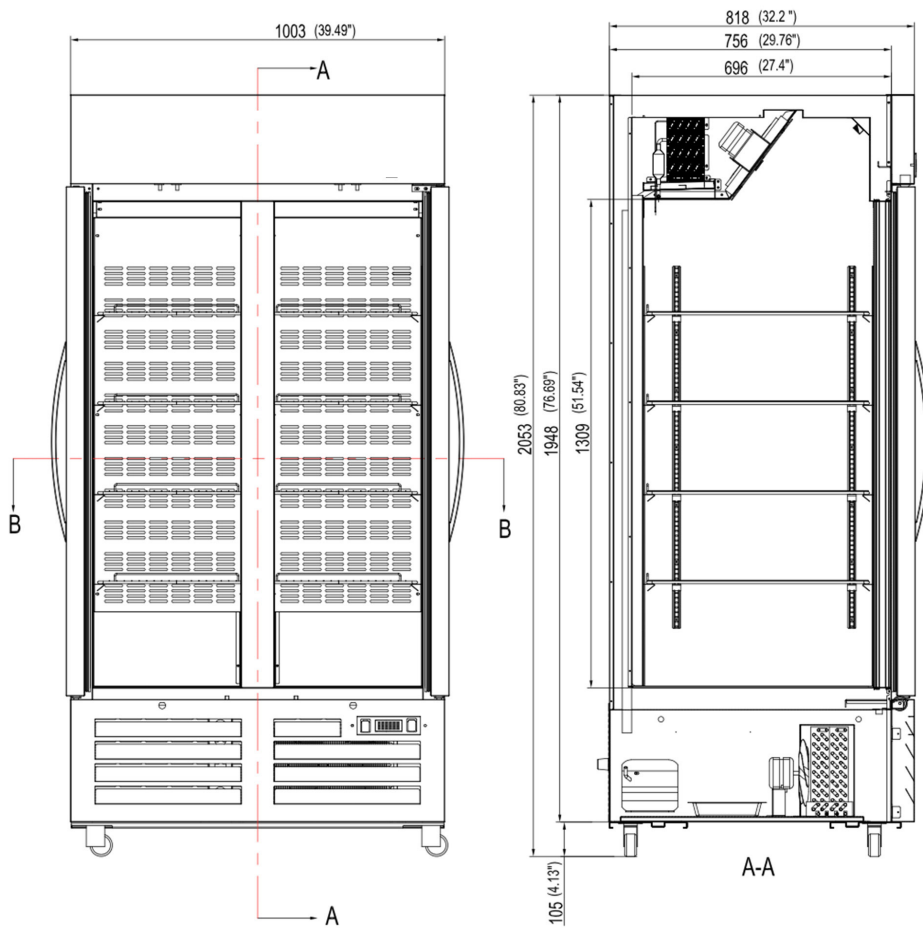


**KK-35BR**

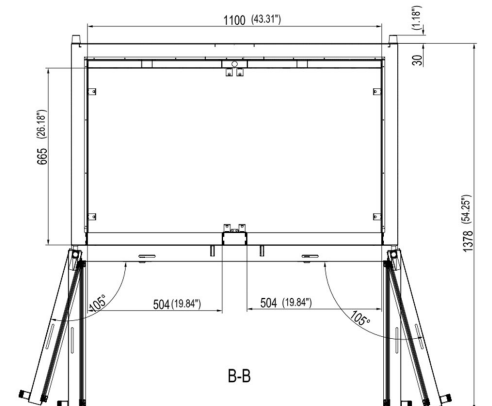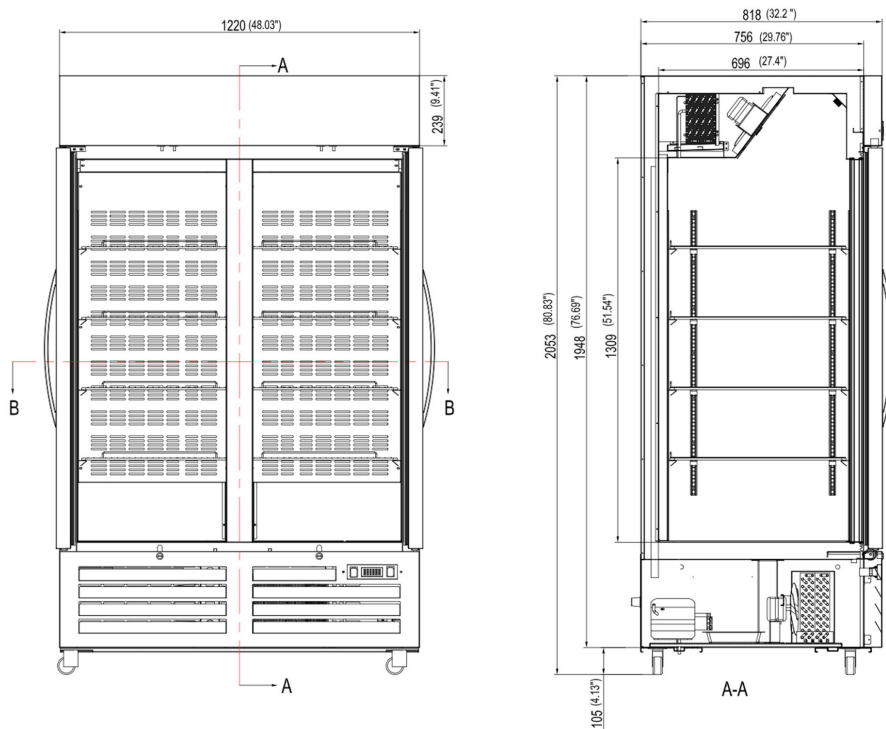


**KK-48BR**

If the data and structure update, without notice, subject to material object.

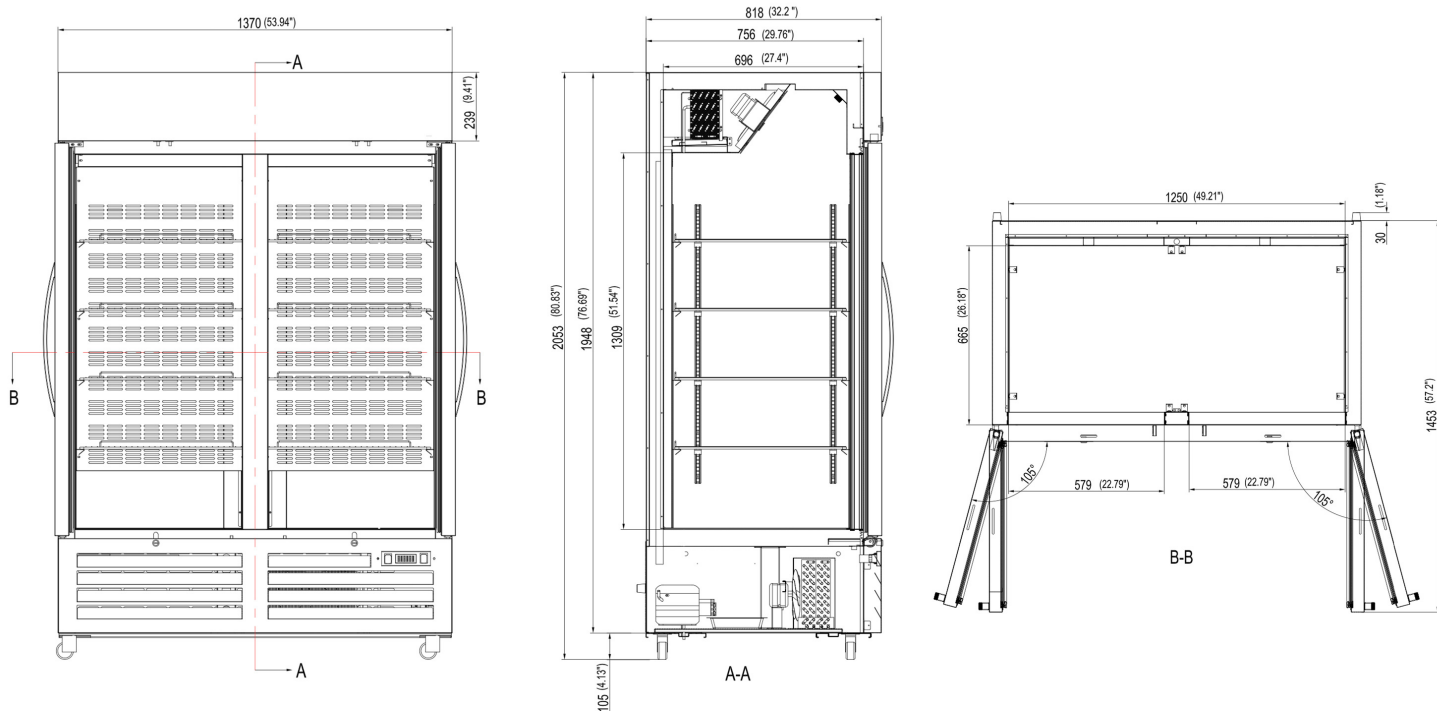

**KK-54BR**

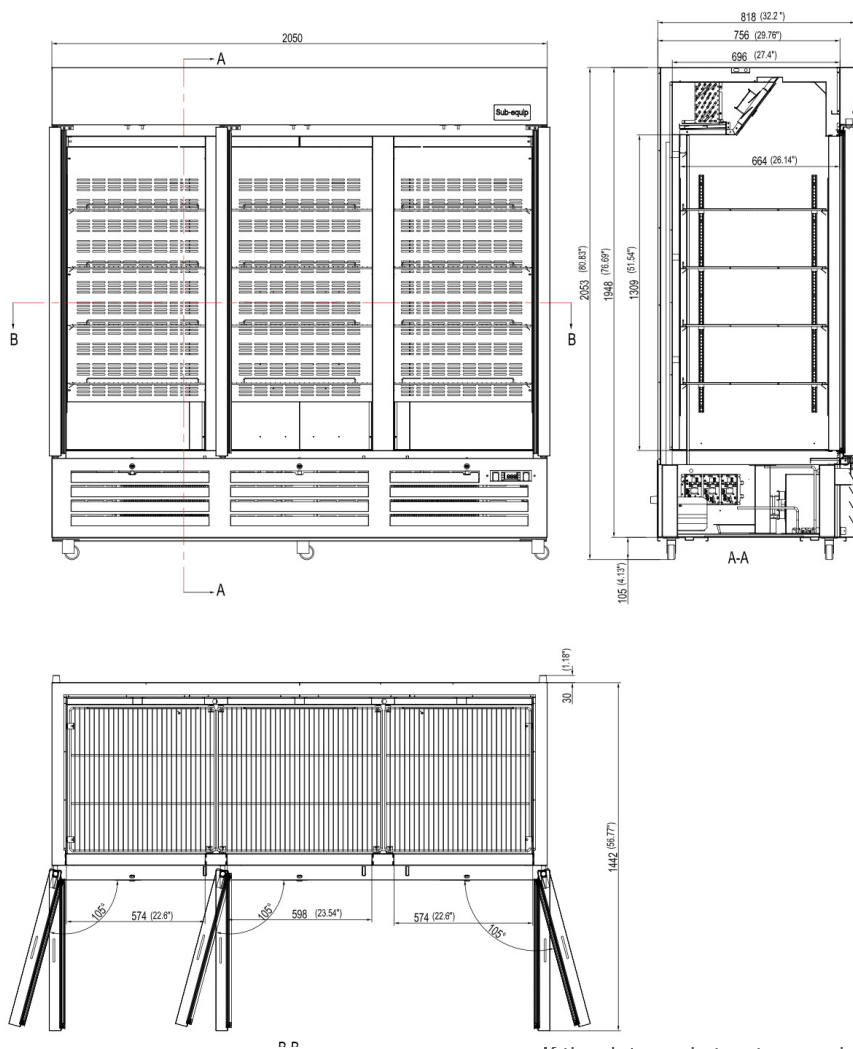

**KK-81BR**