

# SIX HOB

## INDUCTION RANGE



### PERFORMANCE

The CookTek® Six Hob features six independent induction cook zones for precise, efficient heating of any induction-compatible pan\*. Its built-in redundancy ensures uninterrupted performance, allowing each zone to operate independently. Designed for back-of-house applications, it includes a high-impact glass-ceramic cooktop, an automatic shutoff feature, integral cooling fans, and a self-diagnosing microprocessor to ensure a safer, more reliable kitchen environment.\*\*

### FEATURES

- Six independently controlled induction cook zones
- 15,000 W (6 x 2500 W) and 21,000 W (6 x 3500 W) models
- High-quality internal electronics and heavy-gauge Litz wire
- Seamlessly drops into a stainless-steel cart base with built-in storage
- LED bar graph displays
- Rotary knobs with 0–10 power settings
- Built-in redundancy to ensure uninterrupted performance even if one hob requires maintenance
- Over 90% energy efficient—outperforms gas and electric burners
- Easy-to-clean high-temperature glass-ceramic cooktop with six separate induction cook zones
- Automatic pan detection provides instant energy transfer to cookware
- Automatic shut-off feature prohibits overheating
- Integral grease filter and air baffles ensure air intake is cleaner and cooler
- Microprocessors continuously monitor vital components for overheating, power-supply issues, and other conditions
- Integral fans to keep internal components cool
- Hardwired design for a seamless, reliable power connection – no cords or plugs required

### STANDARD INCLUDED ACCESSORIES

- One-year warranty on parts and labor



\*Induction cooking requires the use of induction-compatible (i.e., magnetic) cookware.


\*\*The Six HOB is not approved for marine use.

It is the owner and installer's responsibility to comply with all local codes. CookTek reserves the right to substitute components or change specifications without prior notice.


Applicable models: MC15006-200, MC15006-400, MC21006-200, MC21006-400, MC24006-200, MC24006-400, MC25506-200, MC25506-400

VIC6-SPC-B / April 2026


## FREESTANDING

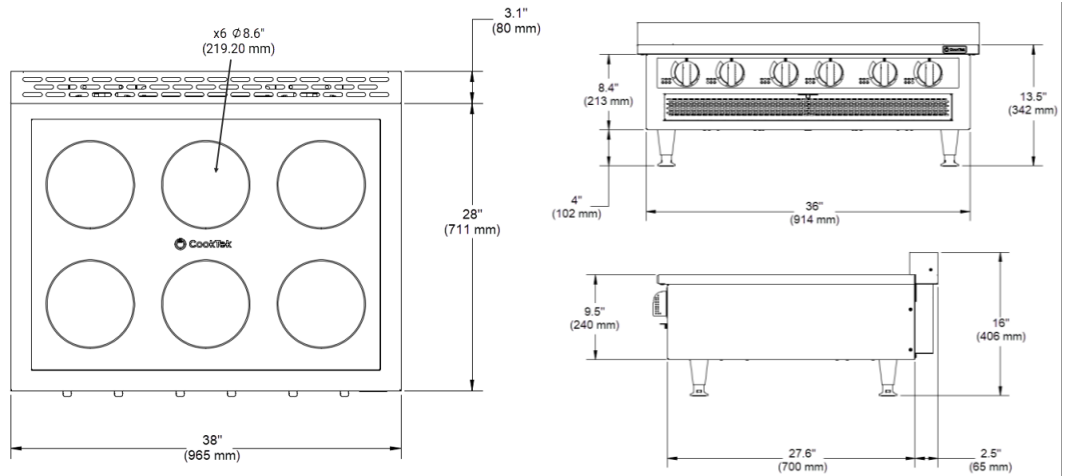

## DROP-IN

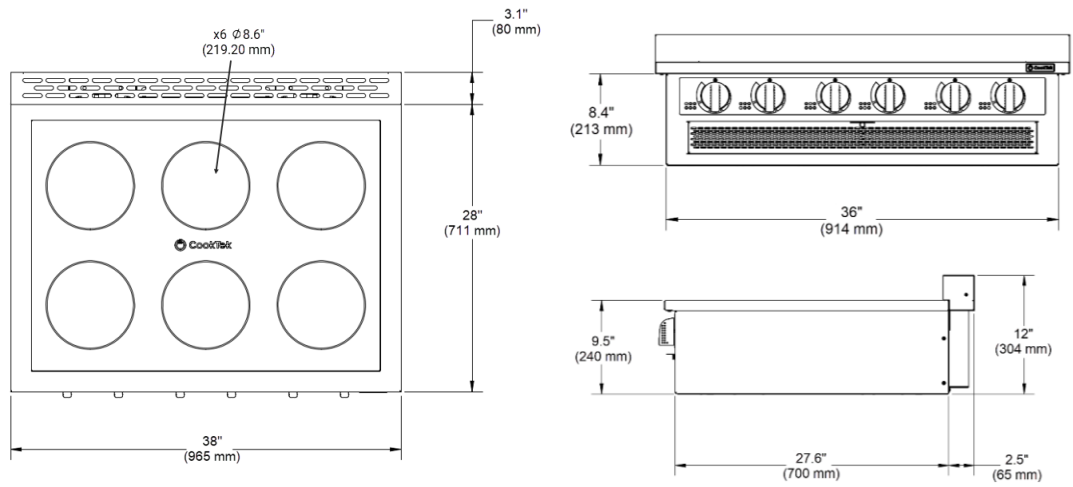

## CART-MOUNTED

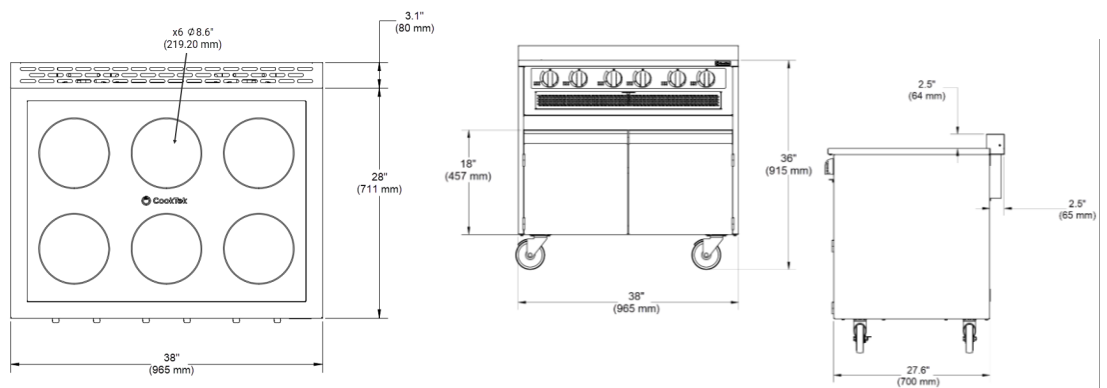

| DIMENSIONS<br>FREESTANDING |        |        |
|----------------------------|--------|--------|
| Full Unit Height           | 16"    | 406 mm |
| Full Unit Width            | 38"    | 965 mm |
| Full Unit Depth            | 30.1"  | 765 mm |
| Hob Diameter               | 8.6"   | 219 mm |
| Cooking Surface Width      | 33.5"  | 851 mm |
| Cooking Surface Depth      | 24.5"  | 622 mm |
| Weight                     | 150 lb | 68 kg  |
| DIMENSIONS<br>DROP-IN      |        |        |
| Full Unit Height           | 12"    | 304 mm |
| Full Unit Width            | 38"    | 965 mm |
| Full Unit Depth            | 30.1"  | 765 mm |
| Hob Diameter               | 8.6"   | 219 mm |
| Cooking Surface Width      | 33.5"  | 851 mm |
| Cooking Surface Depth      | 24.5"  | 622 mm |
| Weight                     | 150 lb | 68 kg  |
| SHIPPING INFORMATION       |        |        |
| Packaged Height            | 26"    | 660 mm |
| Packaged Width             | 37"    | 940 mm |
| Packaged Depth             | 46"    | 1168   |
| Packaged Weight            | 207 lb | 94 kg  |
| Item Class                 | 175    |        |

| WALL CLEARANCE |    |       |
|----------------|----|-------|
| Front          | 2" | 50 mm |
| Sides          | 2" | 50 mm |
| Rear           | 2" | 50 mm |

| COOLING REQUIREMENTS         |         |                          |
|------------------------------|---------|--------------------------|
| Max Ambient Temperature      | 122 °F  | 50 °C                    |
| Internal Cooling Fan Airflow | 460 cfm | 13.0 m <sup>3</sup> /min |

| DIMENSIONS<br>CART-MOUNTED |        |         |
|----------------------------|--------|---------|
| Full Unit Height           | 36"    | 915 mm  |
| Full Unit Width            | 38"    | 965 mm  |
| Full Unit Depth            | 30.1"  | 765 mm  |
| Full Unit Weight           | 253 lb | 115 kg  |
| Cart Height without wheels | 18"    | 457 mm  |
| Cart Depth                 | 27.6"  | 701 mm  |
| Hob Diameter               | 8.6"   | 219 mm  |
| Cart Weight                | 103 lb | 46.2    |
| Cooking Surface Width      | 33.5"  | 851 mm  |
| Cooking Surface Depth      | 24.5"  | 622 mm  |
| SHIPPING INFORMATION       |        |         |
| Packaged Height            | 46"    | 1168 mm |
| Packaged Width             | 37"    | 940 mm  |
| Packaged Depth             | 46"    | 1168 mm |
| Packaged Weight            | 314 lb | 142 kg  |
| Item Class                 | 175    |         |

| ELECTRICAL SPECIFICATIONS - THREE PHASE<br>FREESTANDING/DROP-IN |                                                    |  |
|-----------------------------------------------------------------|----------------------------------------------------|--|
| UNITED STATES                                                   |                                                    |  |
| VIC-9600-FS25-1                                                 | 208/240 VAC, 15,000 W, 3 Phase, 45/50 A, Hardwired |  |
| VIC-9600-FS35-1                                                 | 208/240 VAC, 21,000 W, 3 Phase, 56/63 A, Hardwired |  |

| ELECTRICAL SPECIFICATIONS - THREE PHASE<br>CART-MOUNTED |                                                    |  |
|---------------------------------------------------------|----------------------------------------------------|--|
| UNITED STATES                                           |                                                    |  |
| VIC-9600-CM25-1                                         | 208/240 VAC, 15,000 W, 3 Phase, 45/50 A, Hardwired |  |
| VIC-9600-CM35-1                                         | 208/240 VAC, 21,000 W, 3 Phase, 56/63 A, Hardwired |  |