



USA FOODSERVICE
DIVISION

TRM2I-YN-BLK-WHT-1BLKLL-4

True Retail Merchandiser • 2-Door • Ice Storage –In Line Left Panel/Finished Right Panel – Black Exterior – White Interior
Aluminum Frame Black Doors • All Left Door Hinge – 4000K LED Lighting

Project Name	Location	Item #	Quantity	Model #	AIA #	SIS #
--------------	----------	--------	----------	---------	-------	-------

TRM SERIES



Exterior/Interior Color Options

		
Black Exterior & Black Interior TRM2I-YN-BLK-BLK-1BLKLL-4	White Exterior & White Interior TRM2I-YN-WHT-WHT-1WHTLL-4	White Exterior & Black Interior TRM2I-YN-WHT-BLK-1WHTLL-4



FEATURES

- R290 natural refrigerant.
- Self-contained factory-charged and sealed refrigeration system.
- Interior finish: White.
- Exterior finish: Black.
- Temperatures of 12°F to 18°F (-11.1°C to -7.8°C).
- Self-cleaning technology.
- NSF/ANSI standard 7 compliant for the storage and/or display of packaged products only.
- 4000k color temperature LED interior lighting.
- Cabinet fitted with leg levelers. Utilizing True's patented **True Level leveling system™**.
- "Low-E" triple pane thermal insulated glass doors.
- Stay-Open door feature.
- Holds (220) 8 lbs. (4 kg) bags of ice.

PHYSICAL DATA

Specifications subject to change without notice.

Chart dimensions rounded up to the nearest 1/8" (millimeters rounded up to next whole number).

LED Color Temperature	Usable Capacity (Cu. Ft.) (Liters)	# of Doors	Door Type	# of Shelves	Shelf Type Design	Cabinet Weight (lbs.) (kg)		# of Ref. Decks ≠	Refrig. Deck Weight (lbs.) (kg)		Interior Dimensions (inches) (mm)			Cabinet Dimensions (inches) (mm)			Exterior Finish	Interior Finish	Door Finish	Refrigeration Data			
						Crated	Uncrated		Crated	Uncrated	W	D	H	W	D†	H				Ref Charge	Refrigerant	Min. Temp (°F) (°C)	Max. Temp (°F) (°C)
4000k	77.9	2	Glass	0	N/A	1000	852	1	160	125	62½	28	68½	66¾	38¾	102	Black	White	Black	5.25oz	R290	12°F	18°F
	2206					454	387		73	57	1578	709	1730	1685	987	2591						-11.1°C	-7.8°C

† Depth does not include 1½" (35 mm) for door handles.

≠ Refrigeration decks ship separately and individually.

ELECTRICAL & ENERGY DATA

Specifications subject to change without notice.

Daily Energy Use (Kwh/Day)	Energy Star Certified	# of Ref. Decks	Condenser Type	Total Rejected Heat (Btu/h)	208-240V/60HZ Voltage		Cord Length‡ (total ft.) (total m)	NEMA Configuration		 	DESIGNED WITH INNOVATION IN THE USA 	APPROVALS
					HP (Per Deck)	Total Amps						AVAILABLE AT
14.2	Yes	1	Air Cooled	2420	1¼	6.9	10	 208-240/60 NEMA-L6-20P	Unit completely pre-wired at factory and ready for final connection to a 208-240V-1PH-60Hz, cord and plug set included.	 		
							3.05					4/26



True Retail Merchandiser • 2-Door • Ice Storage –In Line Left Panel/Finished Right Panel – Black Exterior – White Interior
Aluminum Frame Black Doors • All Left Door Hinge – 4000K LED Lighting

Design

- ## Refrigeration System

- ## Doors

- ### Storage Capacity


- ## LED Lighting

- ## Electrical


- ### Optional Features/Accessories

☐ Peg hook kit white (Includes 5 Peg Hooks and clear price tag holders)


- ## PLAN VIEWS

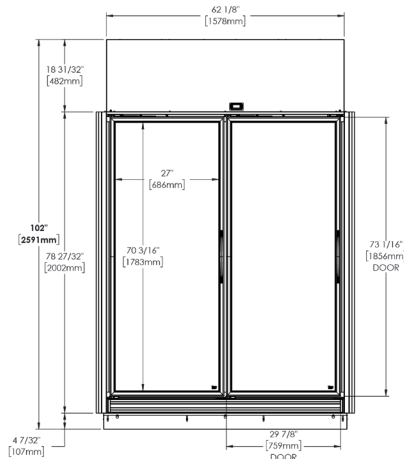

FRONT VIEW

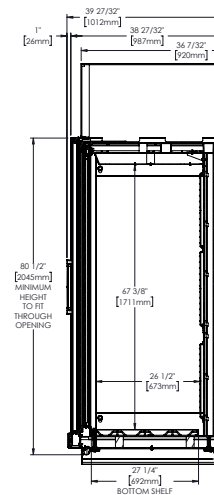

SIDE VIEW

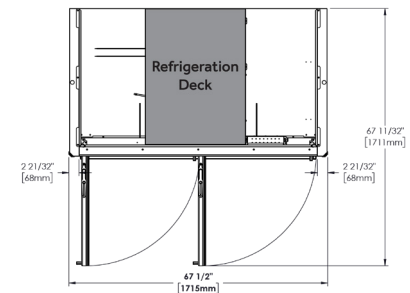

TOP VIEW

Plan View Notes: Dimensions in brackets are in millimeters. • Depth does not include 1½" (35 mm) for door handles • Height does not include ¼" (7 mm) for leg levelers.

2001 East Terra Lane • O'Fallon, MO 63366-4434 • 636-240-2400 • Toll Free 800-325-6152 • Parts Dept. 800-424-True
truemfg.com