



"WE MAKE THE KITCHEN BETTER!"

ATOSA USA, INC.

Toll Free: 855-855-0399 Email: info@atosausa.com

www.atosa.com | www.atosausa.com

California, Colorado, Florida, Georgia, Illinois,
New Jersey, Ohio, Texas, Washington

Undercounter Refrigerators

Standard Features

- Stainless steel exterior & interior
- Field reversible door(s)
- Environmentally friendly R290 refrigerant
- Electronic temperature controller
- Maintains temperatures between 35°F – 38°F
- Self-closing door(s) with stay open feature
- Magnetic door gasket(s) standard for positive door seal
- Two (2) pre-installed shelves per section
- Standard pre-installed 2" heavy duty swivel plate casters:
B0604434 (with brake) & B0604433 (no brake)

Optional Accessories

- Field installable drawer cartridges
- Extended warranty up to 5 years
- 1.2" & 1.5" Low profile swivel plate casters available
- 4" & 5" Swivel stem casters available

Caster Part Number (with brake)	Caster Part Number (no brake)	Description	Unit Overall Height (in)
R06001000228	R06001000229	1.2" swivel plate casters	31 ^{1/4}
R06001000063	N/A	1.5" swivel plate caster	31 ^{7/8}
B0604434	B0604433	2" heavy duty swivel plate casters	32 ^{3/8}
B0604421	B0604413	4" swivel stem casters	34 ^{3/8}
B0604007	B0604006	5" swivel stem casters	35 ^{1/4}

For the best results of food preservation we recommend setting your refrigerator between 35 °F to 38 °F

1. Don't forget to leave the unit some room to breathe!
2. Please clean the condenser frequently to give the unit more fresh air.

MODELS:

**AUR24SD / AUR27SD / AUR36SD / AUR48SD
AUR60SD / AUR72SD**



AUR24SD



AUR27SD



AUR36SD



AUR48SD



AUR60SD



AUR72SD



**3 YEAR PARTS AND LABOR WARRANTY
5 YEAR COMPRESSOR PART WARRANTY**



REV. 08/26



"WE MAKE THE KITCHEN BETTER!"

ATOSA USA, INC.

Toll Free: 855-855-0399 Email: info@atosausa.com

www.atosa.com | www.atosausa.com


California, Colorado, Florida, Georgia, Illinois,

New Jersey, Ohio, Texas, Washington

SPECIFICATIONS

Models	Door	Capacity (Cu.Ft.)	Shelves	Casters (inch)	Rated Current (A)	Voltage (V/Hz/Ph)	HP	Refrigerant	Exterior Dimensions (inch)	Net Weight (lb)	Gross Weight (lb)
AUR24SD	1	3.7	2	2	2.4	115/60/1	1/7	R290	23 ^{7/8} ×26×32 ^{1/2}	108	138
AUR27SD	1	6.4	2	2	2.3	115/60/1	1/6	R290	27 ^{1/2} ×30×32 ^{1/2}	137	168
AUR36SD	2	8.6	4	2	2.3	115/60/1	1/6	R290	36 ^{3/8} ×30×32 ^{1/2}	161	198
AUR48SD	2	11.8	4	2	2.3	115/60/1	1/6	R290	48 ^{1/4} ×30×32 ^{1/2}	182	249
AUR60SD	2	15	4	2	2.8	115/60/1	1/5	R290	60 ^{1/4} ×30×32 ^{1/2}	218	287
AUR72SD	3	18.2	6	2	2.8	115/60/1	1/5	R290	72 ^{5/8} ×30×32 ^{1/2}	254	335

PLAN VIEW

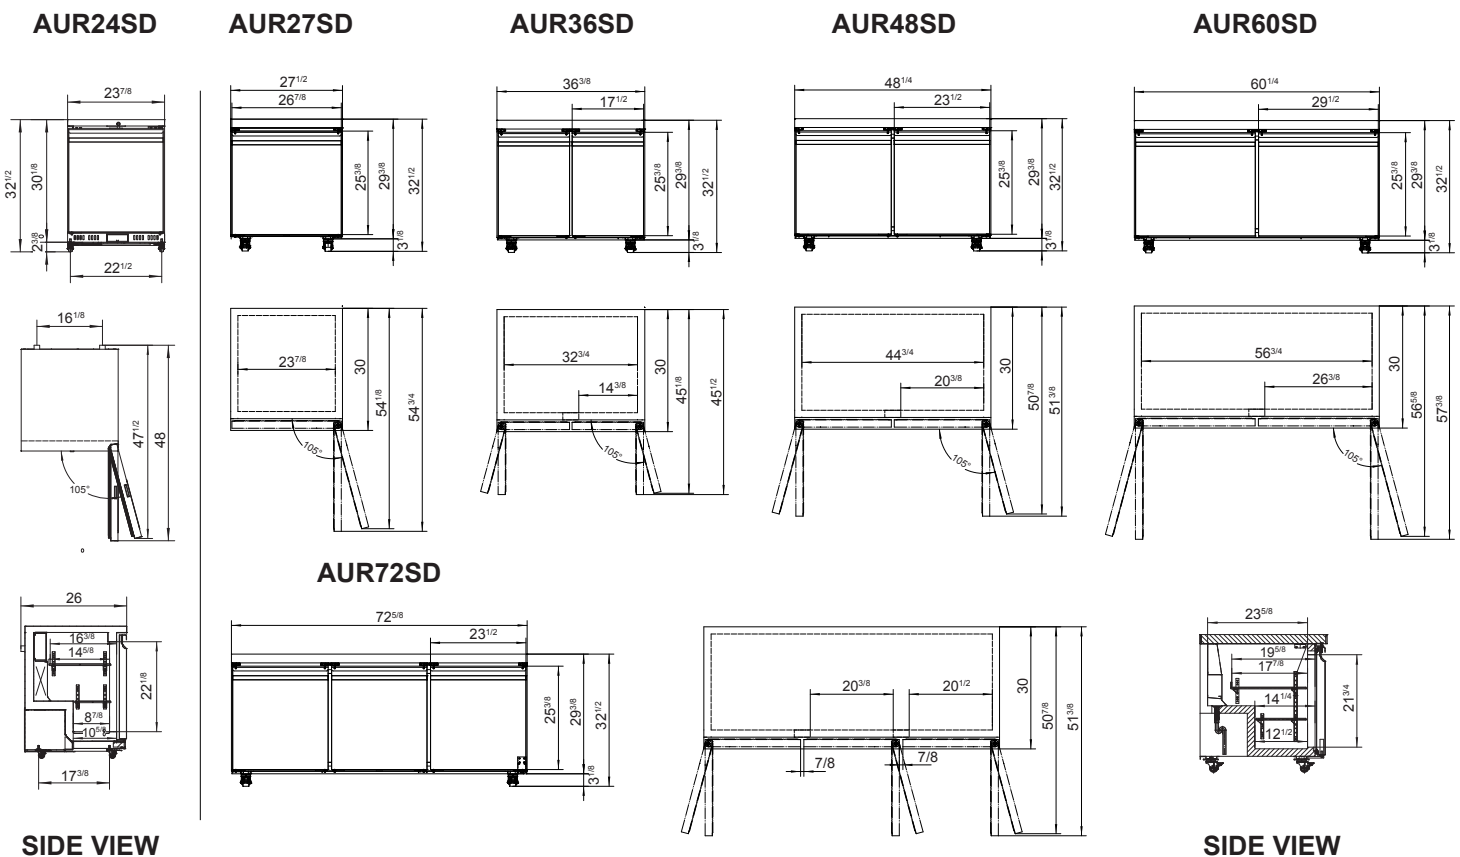

Casters



Epoxy shelves



Rear grate



Temperature control



NEMA 5-15P

