



SELF CONTAINED REFRIGERATED BASES

SELF CONTAINED REFRIGERATED BASES



JRLH-02S-T-48 shown with JMRH-48B

MODEL NO.	DESCRIPTION
☐ JRLH-02S-T-36	36" 2 DRAWER SELF CONTAINED REFRIGERATOR UNIT
☐ JRLH-02S-T-48	48" 2 DRAWER SELF CONTAINED REFRIGERATOR UNIT
☐ JRLH-02S-T-60	60" 2 DRAWER SELF CONTAINED REFRIGERATOR UNIT
☐ JRLH-04S-T-72	72" 4 DRAWER SELF CONTAINED REFRIGERATOR UNIT
☐ JRLH-04S-T-84	84" 4 DRAWER SELF CONTAINED REFRIGERATOR UNIT
☐ JRLH-06S-T-102	102" 6 DRAWER SELF CONTAINED REFRIGERATOR UNIT
☐ JRLH-06S-T-114	114" 6 DRAWER SELF CONTAINED REFRIGERATOR UNIT
☐ JFLH-02S-T-48	48" 2 DRAWER SELF CONTAINED FREEZER UNIT
☐ JFLH-02S-T-60	60" 2 DRAWER SELF CONTAINED FREEZER UNIT
☐ JFLH-04S-T-72	72" 4 DRAWER SELF CONTAINED FREEZER UNIT
☐ JFLH-04S-T-84	84" 4 DRAWER SELF CONTAINED FREEZER UNIT

Note: If required size is not listed, see options for cabinet extensions. Bases must be ordered in conjunction with Titan™ modular base range units only.

STANDARD FEATURES

- Cabinet interiors, front, face and sides to be stainless steel
- Drawers and cabinet are 100% polyurethane "Shot-In-Place" foam insulated
- Drawer faces have flush mount pull handle. Face and back to be stainless steel
- Self closing drawers have 14 gauge stainless steel track, with 2" heavy duty skate wheel
- Heavy duty rubber drawer gaskets
- 6' cord and plug, 115 VAC
- Drawers to be easily removable for cleaning
- Drawers to accommodate 6" deep 12" x 20" hotel pans
- Specially designed high density breaker strips installed during the foaming process, without any visible fasteners
- Face mounted dial thermometers
- Condensing unit uses R-404 refrigerant unless otherwise specified
- Blower coil evaporator with R-404 expansion valve
- Internal conduit for single point electrical connection
- Built in condensate evaporator
- Sleeves for refrigeration and drain lines
- Stainless steel 6" adjustable legs

AVAILABLE OPTIONS

- ☐ Cabinet extensions available:
 - ☐ 6" stainless steel filler
 - ☐ 12" stainless steel cabinet
 - ☐ 18" stainless steel cabinet
- ☐ Padlock assemblies (padlocks not included)

ACCESSORIES

- ☐ 6" casters, front two locking (5" diameter wheel)




WWW.JADERANGE.COM

JADE RANGE, LLC., A MIDDLEBY COMPANY • 2650 Orbiter Street • Brea, CA 92821 • PHONE: 800-884-5233 FAX: 714-961-2550
Note: In line with their policy to continually improve products, Jade reserves the right to change materials and specifications without notice. PRINTED IN USA





SELF CONTAINED REFRIGERATED BASES

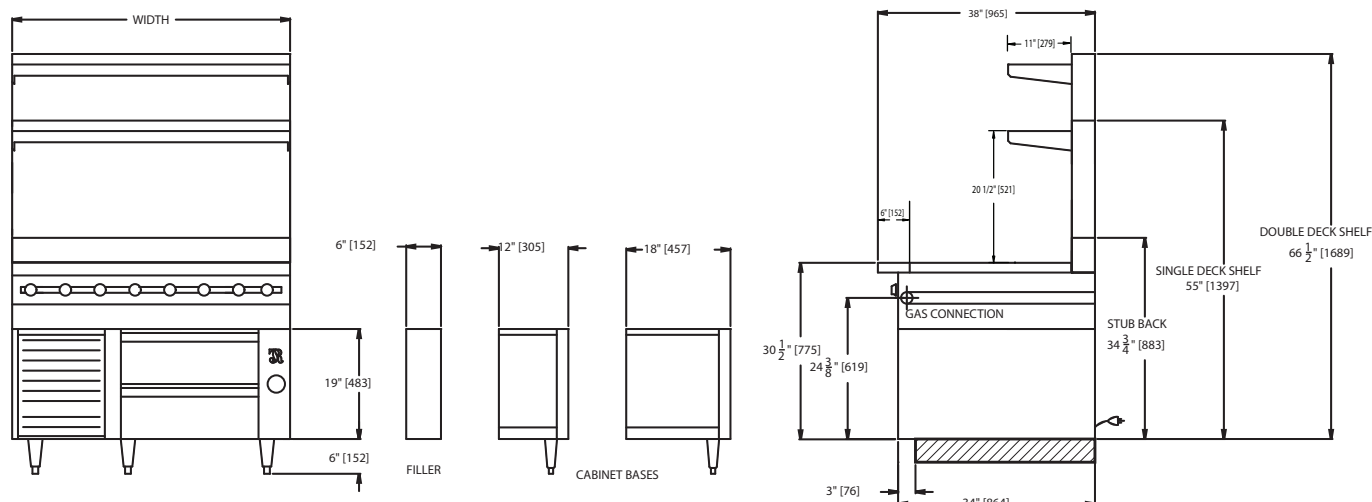

Note: If sauté station (JMSS models) mounted above, H.P. will be larger (consult factory).

MODEL	WIDTH	DEPTH	HEIGHT	DRAWERS 14-3/8"	DRAWERS 27-1/4"	PANS	AMPS	CUBIC FT.	APPX. SHP. WT.
SELF CONTAINED REFRIGERATOR BASES									
JRLH-O2S-T-36	36"	34"	19-1/4"	2		2	12.6	3	300 LBS.
JRLH-O2S-T-48	48"	34"	19-1/4"		2	4	12.6	6	350 LBS.
JRLH-O2S-T-60	60"	34"	19-1/4"		2	4	12.6	9?	465 LBS.
JRLH-O4S-T-72	72"	34"	19-1/4"	2	2	6	12.6	11.2	500 LBS.
JRLH-O4S-T-84	84"	34"	19-1/4"		4	8	12.6	13.4	550 LBS.
JRLH-O6S-T-102	102"	34"	19-1/4"	2	4	10	13.2	18	650 LBS.
JRLH-O6S-T-114	114"	34"	19-1/4"		6	12	13.2	20.1	700 LBS.
SELF CONTAINED FREEZER BASES									
JFLH-O2S-T-48	48"	34"	19-1/4"		2	3	10.6	6	350 LBS.
JFLH-O2S-T-60	60"	34"	19-1/4"		2	3	10.6	9	465 LBS.
JFLH-O4S-T-72	72"	34"	19-1/4"	2	2	5	10.7	11.2	500 LBS.
JFLH-O4S-T-84	84"	34"	19-1/4"		4	7	11.8	13.4	550 LBS.

DESCRIPTION:

Low Height Self Contained refrigerated bases for exclusive use with Jade Range, LLC. Titan™ modular series units. To be Model # _____, manufactured by Jade Range, LLC. Cabinet interior, front face, drawers and sides to be stainless steel. Balance to be galvanized steel. Drawers and cabinet to be 100% polyurethane "Shot-In-Place" foam insulated. Provide easily removable self closing drawers to accommodate 6" deep 12" x 20" hotel pans and 14 gauge stainless steel track, with 2" heavy duty skate wheels. Include heavy duty rubber drawer gaskets, 6' cord and plug 115

VAC, face mounted dial thermometers, condensing unit with R-404 refrigerant, blower coil evaporator with expansion valve. Provide built-in condensate evaporator, internal conduit for single point electrical connection. Include sleeves for refrigeration and drain lines. Supply stainless steel adjustable 6" legs.

UTILITY INFORMATION - ELECTRICAL:

- Standard: 115v/60/1 (for other electrical requirements consult factory)