



USA FOODSERVICE  
DIVISION

## TRM2I-NY-BLK-WHT-1BLKLL-4

True Retail Merchandiser • 2-Door • Ice Storage – Finished Left Panel/In Line Right Panel – Black Exterior – White Interior  
Aluminum Frame Black Doors • All Left Door Hinge – 4000K LED Lighting

| Project Name | Location | Item # | Quantity | Model # | AIA # | SIS # |
|--------------|----------|--------|----------|---------|-------|-------|
|--------------|----------|--------|----------|---------|-------|-------|

### TRM SERIES



#### Exterior/Interior Color Options

|                                                                                   |                                                                                   |                                                                                   |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
|  |  |  |
| Black Exterior & Black Interior<br>TRM2I-NY-BLK-BLK-1BLKLL-4                      | White Exterior & White Interior<br>TRM2I-NY-WHT-WHT-1WHTLL-4                      | White Exterior & Black Interior<br>TRM2I-NY-WHT-BLK-1WHTLL-4                      |



### FEATURES

- R290 natural refrigerant.
- Self-contained factory-charged and sealed refrigeration system.
- Interior finish: White.
- Exterior finish: Black.
- Temperatures of 12°F to 18°F (-11.1°C to -7.8°C).
- Self-cleaning technology.
- NSF/ANSI standard 7 compliant for the storage and/or display of packaged products only.
- 4000k color temperature LED interior lighting.
- Cabinet fitted with leg levelers. Utilizing True's patented **True Level leveling system™**.
- "Low-E" triple pane thermal insulated glass doors.
- Stay-Open door feature.
- Holds (220) 8 lbs. (4 kg) bags of ice.

### PHYSICAL DATA

Specifications subject to change without notice.  
Chart dimensions rounded up to the nearest 1/8" (millimeters rounded up to next whole number).

| LED Color Temperature | Usable Capacity (Cu. Ft.) (Liters) | # of Doors | Door Type | # of Shelves | Shelf Type Design | Cabinet Weight (lbs.) (kg) |          | # of Ref. Decks ≠ | Refrig. Deck Weight (lbs.) (kg) |          | Interior Dimensions (inches) (mm) |     |      | Cabinet Dimensions (inches) (mm) |     |      | Exterior Finish | Interior Finish | Door Finish | Refrigeration Data |             |                     |                     |
|-----------------------|------------------------------------|------------|-----------|--------------|-------------------|----------------------------|----------|-------------------|---------------------------------|----------|-----------------------------------|-----|------|----------------------------------|-----|------|-----------------|-----------------|-------------|--------------------|-------------|---------------------|---------------------|
|                       |                                    |            |           |              |                   | Crated                     | Uncrated |                   | Crated                          | Uncrated | W                                 | D   | H    | W                                | D†  | H    |                 |                 |             | Ref Charge         | Refrigerant | Min. Temp (°F) (°C) | Max. Temp (°F) (°C) |
| 4000k                 | 77.9                               | 2          | Glass     | 0            | N/A               | 1000                       | 852      | 1                 | 160                             | 125      | 62½                               | 28  | 68½  | 67¾                              | 38¾ | 102  | Black           | White           | Black       | 5.25oz             | R290        | 12°F                | 18°F                |
|                       | 2206                               |            |           |              |                   | 454                        | 387      |                   | 73                              | 57       | 1578                              | 709 | 1730 | 1711                             | 987 | 2591 |                 |                 |             |                    |             | -11.1°C             | -7.8°C              |

† Depth does not include 1½" (35 mm) for door handles.

≠ Refrigeration decks ship separately and individually.

### ELECTRICAL & ENERGY DATA

Specifications subject to change without notice.

| Daily Energy Use (Kwh/Day) | Energy Star Certified | # of Ref. Decks | Condenser Type | Total Rejected Heat (Btu/h) | 208-240V/60HZ Voltage |            | Cord Length‡ (total ft.) (total m) | NEMA Configuration                                                                                         |                                                                                                                         |   | DESIGNED WITH INNOVATION IN THE USA  | APPROVALS    |
|----------------------------|-----------------------|-----------------|----------------|-----------------------------|-----------------------|------------|------------------------------------|------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|--------------|
|                            |                       |                 |                |                             | HP (Per Deck)         | Total Amps |                                    |                                                                                                            |                                                                                                                         |                                                                                                                                                                             |                                                                                                                           | AVAILABLE AT |
| 14.2                       | Yes                   | 1               | Air Cooled     | 2420                        | 1¼                    | 6.9        | 10                                 |  208-240/60 NEMA-L6-20P | Unit completely pre-wired at factory and ready for final connection to a 208-240V-1PH-60Hz, cord and plug set included. |   |                                      |              |
|                            |                       |                 |                |                             |                       |            | 3.05                               |                                                                                                            |                                                                                                                         |                                                                                                                                                                             |                                                                                                                           | 8/26         |



USA FOODSERVICE  
DIVISION

## TRM2I-NY-BLK-WHT-1BLKLL-4

True Retail Merchandiser • 2-Door • Ice Storage – Finished Left Panel/In Line Right Panel – Black Exterior – White Interior  
Aluminum Frame Black Doors • All Left Door Hinge – 4000K LED Lighting

### ADDITIONAL FEATURES

#### Design

- True's commitment to using the highest quality materials and energy efficient refrigeration systems provides the user with colder product temperatures and lower utility costs.
- Take advantage of the install flexibility, convenience, and efficiency of this self-contained case. Fit TRM's through 82" height and 41" wide openings, move the case into location, install the compact sealed condensing systems and plug it in. No refrigeration connections or technicians needed for install.
- The entire cabinet structure is built using high-density, polyurethane insulation that has zero ozone depletion potential.
- Refrigeration redundancy architecture helps prevent product loss.
- Patented **True Level System™** for a quick install.

#### Refrigeration System

- Environmentally friendly R290 Natural Refrigerant system.
- Self-contained factory-charged and sealed refrigeration system.
- The **True Dynamic Refrigeration Response System™** allows for quick product pull down where and when cooling demand is needed.
- Refrigeration decks ship separately; installed onsite.
- Self-cleaning reverse cleaning fan motor technology helps prevent condenser blockage.

- Plug-and-play electrical system for seamless installation (No refrigeration tech or electrician needed).
- DOE and Energy Star Listed.
- NSF/ANSI standard 7 compliant for the storage and/or display of packaged products only.
- Cabinet designed for optimum performance in air-conditioned areas not to exceed 80°F ambient and 55% relative humidity.
- High-efficiency variable speed compressor technology.

#### Doors

- Self closing doors with stay open feature.
- "Low-E" triple pane thermal insulated glass door.
- Viewable glass height of 70" for maximum product display.
- Magnetic door gasket of one piece construction, removable without tools for ease of cleaning.
- For all left hinge units (LL) the right most door is field reversible on NN and YN end panel models.
- For all right hinge units (RR) the left most door is field reversible on NN and NY end panel models.

#### Storage Capacity

- Holds (220) 8 lbs. (4 kg) bags of ice.

#### LED Lighting

- 4000k color temperature LED interior lighting, provides brilliant lighting throughout the cabinet.

#### Electrical


- Unit completely pre-wired at factory and ready for final connection to a 208-240V-1PH-60Hz, cord and plug set included.

#### Optional Features/Accessories


(upcharge and lead times may apply)

- ☐ Peg hook kit white (Includes 5 Peg Hooks and clear price tag holders)
- ☐ Peg hook kit Black (Includes 5 peg Hooks and clear price tag holders)
- ☐ Balloon guard kit
- ☐ Heated drain pan assembly
- ☐ Bottom sill product Id strip clear
- ☐ Shelf product ID strip white
- ☐ Shelf product ID strip black
- ☐ Corner kit black
- ☐ Black or white cantilever shelves
- ☐ Black interior


### PLAN VIEWS

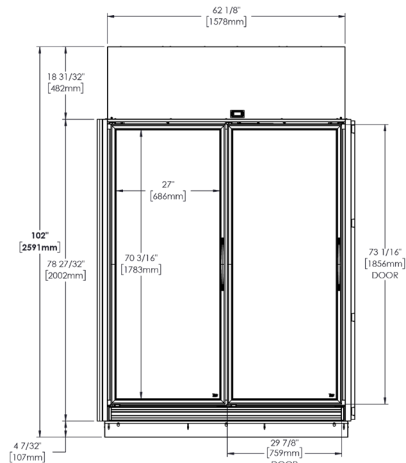

FRONT VIEW

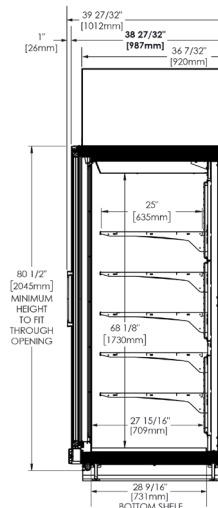

SIDE VIEW

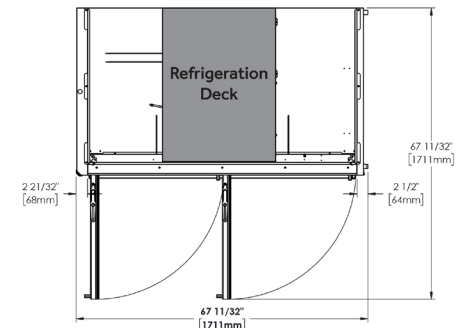

TOP VIEW

**Plan View Notes:** Dimensions in brackets are in millimeters. • Depth does not include 1 1/2" (35 mm) for door handles • Height does not include 1/4" (7 mm) for leg levelers.

2001 East Terra Lane • O'Fallon, MO 63366-4434 • 636-240-2400 • Toll Free 800-325-6152 • Parts Dept. 800-424-True  
truemfg.com