

MADE IN ITALY



Models:
ARG-30US

Standard Features


- Heavy-duty stainless-steel construction.
- Energy-saving gelato hardening cycle.
- Top-mounted refrigeration system.
- Ventilated refrigeration for uniform temperature distribution.
- Electronic touch-screen controller with 2.8" digital display.
- Continuous temperature monitoring with digital control system.
- Automatic hot gas defrost system.
- Automatic condensate evaporation.
- Eco-friendly R290 natural refrigerant.
- Includes 5 shelves measuring 560 × 740 mm (22.0" × 29.1").
- Cabinet insulation thickness: 70 mm (2.8").
- Shelf pitch spacing: 24 mm (0.94").
- Internal net capacity: 584 L (20.6 cu. ft.).
- Gross capacity: 750 L (26.5 cu. ft.).
- Temperature range: -22°C to -10°C (-7.6°F to 14°F).

Optional Accessory:

- RGMM0094 Set of Casters
- 45020540 Shelves 56x74cm (22.1" x 29.1")



**GELATO &
ICE CREAM
CABINET**


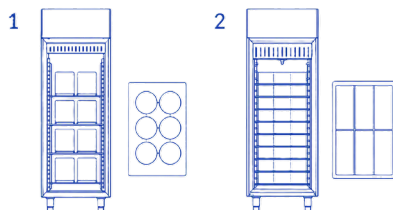


Room up to


- (1) 24 gelato tubs at Ø200×250 mm (Ø7.9"×9.8")
- (2) 54 gelato pans sized 360×160×120mm (14.2"× 6.3"×4.7")

1-year parts and labor warranty (US Only)

BATCH FREEZERS

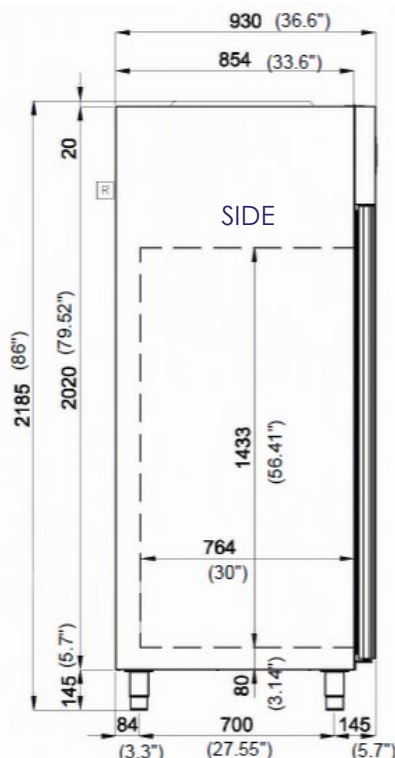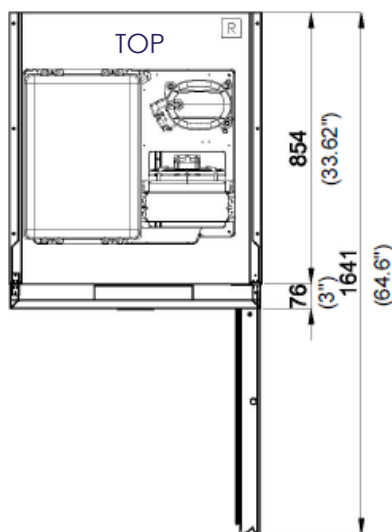


SPECIFICATIONS	
ARG-30US	
Gelato pan Capacity 360 × 160 × 120 mm (14.2" × 6.3" × 4.7")	54
Gelato Tubs Capacity Ø200 × 250 mm (Ø7.9" × 9.8")	24
Net Capacity	20.6 cu.ft. (584 L)
Temperature Range	(-22°C to -10°C) -7.6°F to 14°F
Chamber Temperature	203/-40°F
Refrigerant	R290
Maximum Power Consumption	810 W (2764 btu/h)
Refrigeration Capacity	933 W (3183 btu/h)
Water Evaporation	Automatic
Power Supply	110V/60Hz/1ph
Amps	10
Plug / Connection	NEMA 5-20P
Net Weight	370 lbs (168 Kg)
Product Dim. (WxDxH)	31.1" × 36.6" × 86.2 (79 × 93 × 219 cm)
Shipping Weight (lbs)	392 lbs (178 Kg)
Shipping Dim. (WxDxH)	32.7" × 38.2" × 87.0"
Accessories (not included)	Shelf 22.0" × 29.1" Casters kit 4" diameter each

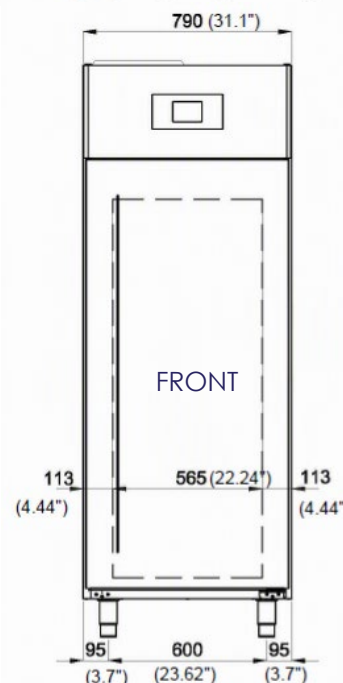

Notes:

- Properly clean and dry after daily use to ensure best performance and equipment longevity.

AMPTO is continuously improving products. Specifications are subject to change without notice.



Nema 5-20 125 VAC
2 Pole, 3 Wire, Grounding