ColorPoint

Beverage Serving Counter
Molded Fiberglass (MF)



CP-BT-MF-60

Project: _____

Item: _____

Quantity: _____

Date: _____

Models	Length
❑ **CP-BT-MF-28**	28 3/8"
❑ **CP-BT-MF-36**	36 3/8"
❑ **CP-BT-MF-50**	50 3/8"
❑ **CP-BT-MF-60**	60 3/8"
❑ **CP-BT-MF-66**	66 3/8"
❑ **CP-BT-MF-74**	74 3/8"
❑ **CP-BT-MF-84**	84 3/8"
❑ **CP-BT-MF-96**	96 3/8"

Standard Features

✓ 30" wide 14 gauge stainless steel top
✓ Molded fiberglass body
✓ Drain trough
✓ Open Storage Base
✓ 5" Locking Swivel Casters
✓ Cam Operated Line-up Locks

ANSI / NSF2

U.L. Sanitation Classified to NSF Standards

- **Versatile counters, add the options you need!**
- **Durable, colorful, molded fiberglass**
- **Easy to clean, low maintenance**
- **Hundreds of color options**

Specifications

Top - Top to be 30 wide and fabricated from a minimum of 14 gauge stainless steel with square turndown on all sides and corners fully welded, ground and polished. Top to have #4 satin finish.

Body (MF) - Body to be seamless molded fiberglass (F.R.P.) with smooth exterior surfaces and rounded corners. To be constructed by a hand lay-up process with four layers of 1.5 oz continuous strand fiberglass mat, plus a 24 oz layer of woven roving on the bottom for added strength. Fiberglass to be flame retardant per specification ASTM E-162 having a flame spread of 25% or less. Body interior to be reinforced at each end with 4 wide, 12 gauge galvanized uprights welded to support shelving to form integral U frame for maximum stress relief.

Drain Trough - 14 ga. stainless steel drain trough welded into top and fitted with a removable stainless steel anti splash grid. Trough to slope to 1" open brass drain and extend to 1/4 turn CPVC hose bib shut off valve located below base.

Options

Top Options
❑ Height Other Than Standard 36" (Specify _____)
❑ (MR) #7 Hi-Lite Edge
❑ (TWE) Top Width Extension (Specify _____)

Tray Slide/Cutting Board Options
❑ (A) 10" Beaded, Stainless Steel Tray Slide
❑ (B) 10" Flat Surface, Stainless Steel Tray Slide
❑ (CTS) 10" Corian Tray Slide Solid
❑ (CTR) 10" Corian Tray Slide Routed Runners
❑ (D) 6" Wide Stainless Steel Cutting Board
❑ (E) 6" Wide Richlite® Composite
❑ (E1) 6" Sanalite® Cutting Board
❑ (FF) End Drop Shelf 12" x 30"

Base Options
❑ (AP) End Access Panel
❑ (EB) Enclosed Base – No Under Storage
❑ (CL) Cylinder Locks
❑ (Y) Hinged Doors
❑ (MM) Vertical Trim Strips
❑ (SS) Stainless Steel Legs
❑ (TK) S/S Toe Kick

Plumbing & Electrical Options
❑ (DD) Convenience Outlet, Flush
❑ (DC) Daisy Chain Outlet
❑ (DWP-T) CPVC drain to threaded ball valve
❑ (DWC) Coppper drain to 1/4 turn hose bibb valve
❑ (DWC-T) Copper drain to threaded ball valve
❑ Alternate Drain Location (Consult Factory)

REV 6/6/26


LTI, Inc.
1947 Bill Casey Parkway
Jonesboro, GA 30236
(888) 584-2722
lowtempind.com

Approvals:

Beverage Serving Counter

Molded Fiberglass (MF)

ColorPoint

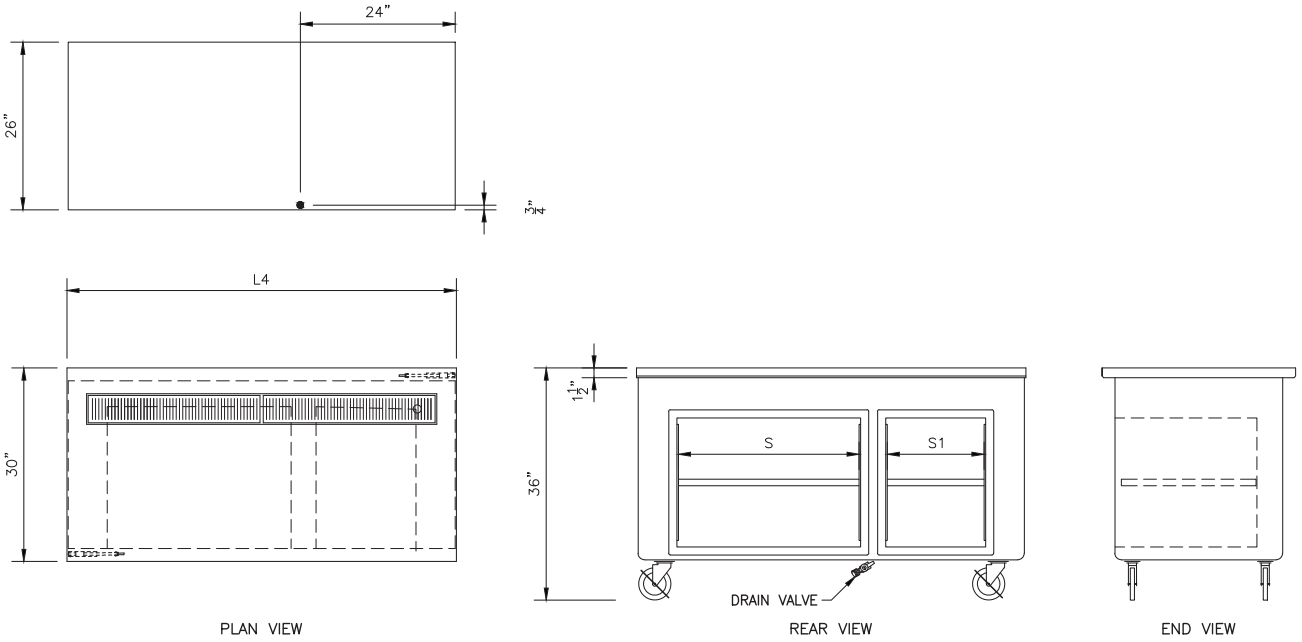

Model	L	S	S1	Approx. Ship Weight
CP-BT-MF-28	28 3/8"	15"	N/A	205 lbs.
CP-BT-MF-36	36 3/8"	15"	N/A	220 lbs.
CP-BT-MF-50	50 3/8"	28"	N/A	260 lbs.
CP-BT-MF-60	60 3/8"	28"	15"	300 lbs.
CP-BT-MF-66	66 3/8"	28"	15"	320 lbs.
CP-BT-MF-74	74 3/8"	28"	28"	340 lbs.
CP-BT-MF-84	84 3/8"	28"	28"	360 lbs.
CP-BT-MF-96	96 3/8"	28"	28"	380 lbs.

Decor Options (Contact Factory)

- ❑ Vinyl Graphic
- ❑ Body Decal
- ❑ Stand Off Panel
  (Specify Materials_____)

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacement for previously purchased equipment.

All equipment to be built in accordance with the Underwriters Laboratories. Inc. and the National Sanitation Foundation, Inc. standards and shall bear the Underwriters Laboratories, Inc. listing label for safety and the Underwriters Laboratories classification label for sanitation.

REV 6/6/26

LTI, Inc.
1947 Bill Casey Parkway
Jonesboro, GA 30236
(888) 584-2722
lowtempind.com

Beverage Serving Counter
Molded Fiberglass (MF)