

Fusion

Product Specifications

ITEM NO: _____
PROJECT: _____
DATE: _____

Refrigerated Service Case



MODEL SHOWN: GMDS4R

NOTE: SHOWN W/ OPTIONAL CUTAWAY END PANEL

- ☐ GMDS4R
- ☐ GMDS5R
- ☐ GMDS6R
- ☐ GMDS8R

Lengths include 1-1/8" end panels
51"L x 43"D x 51-5/8"H
62-7/8"L x 43"D x 51-5/8"H
75-3/8"L x 43"D x 51-5/8"H
99-3/4"L x 43"D x 51-5/8"H

STANDARD FEATURES

- Breeze™ w/EnergyWise s/c refrigeration
- Compressor air intake from rear and out front panel at toe kick. Front panel cannot be blocked.
- Condensate pan (self-contained refrig. only)
- Flat upper front panel
- Integrated average product temperature of 40°F or less
- LED 4000K top & shelf lights
- One year parts & labor; 5 year compressor warranty
- Solid shelf, lighted

Features	Standard	Options
EXTERIOR COLOR	☐ Laminated (non-premium) Confirm pattern/grain direction	☐ Laminated (premium) Confirm pattern/grain direction ☐ Painted (stock colors, specify RAL#) ☐ Stainless steel
INTERIOR COLOR	☐ Black	☐ Stainless steel
LOWER FRONT PANEL COLOR	☐ Painted - Black	☐ Stainless steel
REAR EXTERIOR	☐ Stainless steel	☐ Painted - Black ☐ Painted - White
TRIM COLOR	☐ Black	☐ Silver
BASE	☐ Casters w/ levelers (n/a w/ remote ref.)	☐ 6"H legs (n/a w/ remote ref.)
END PANEL LEFT	☐ Full end panel w/stainless mirrored interior	☐ Cutaway w/ glass ☐ No end panel w/ synchronized defrost
END PANEL RIGHT	☐ Full end panel w/stainless mirrored interior	☐ Cutaway w/ glass ☐ No end panel w/ synchronized defrost
FRONT GLASS	☐ Curved single pane, lift-up front glass w/o lock	☐ Flat angled single pane, lift-up front glass w/o lock
UPPER REAR	☐ Clear glass rear sliding doors w/o lock	☐ Reflective glass rear sliding doors w/o lock
ELECTRICAL CONNECT	☐ 6' straight blade power cord (self-cont.)	☐ 6' locking power cord (self-cont.) ☐ Electrical leads (remote)
REFRIGERATION	☐ Breeze™ w/EnergyWise s/c refrigeration	☐ NOTE: Remote only available w/rail base w/shims. N/A w/ levelers, casters or legs. ☐ Note: Remote doesn't incl Conds unit. Floor drain reqd. ☐ Remote w/thermostat, solenoid & TXV
MISCELLANEOUS		☐ Front glass lock ☐ Rear door lock ☐ Scale stand w/receptacle (requires separate circuit) ☐ Second year parts & labor warranty (excludes compressor)
ACCESSORIES		☐ 2"H Full depth display risers (n/a w/shelf) ☐ Angled display steps (n/a w/shelf) ☐ Clean Sweep® coil cleaner (n/a w/remote) ☐ Price tag molding (matches interior color) ☐ Rear wrapping board, white Sanalite®





Product Specifications

Zone	Intended Product To Be Displayed
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12
13	13
14	14
15	15
16	16
17	17
18	18
19	19
20	20
21	21
22	22
23	23
24	24
25	25
26	26
27	27
28	28
29	29
30	30
31	31
32	32
33	33
34	34
35	35
36	36
37	37
38	38
39	39
40	40
41	41
42	42
43	43
44	44
45	45
46	46
47	47
48	48
49	49
50	50
51	51
52	52
53	53
54	54
55	55
56	56
57	57
58	58
59	59
60	60
61	61
62	62
63	63
64	64
65	65
66	66
67	67
68	68
69	69
70	70
71	71
72	72
73	73
74	74
75	75
76	76
77	77
78	78
79	79
80	80
81	81
82	82
83	83
84	84
85	85
86	86
87	87
88	88
89	89
90	90
91	91
92	92
93	93
94	94
95	95
96	96
97	97
98	98
99	99
100	100

Warmest Avg Prod Temp ° F

40

SIDE VIEW

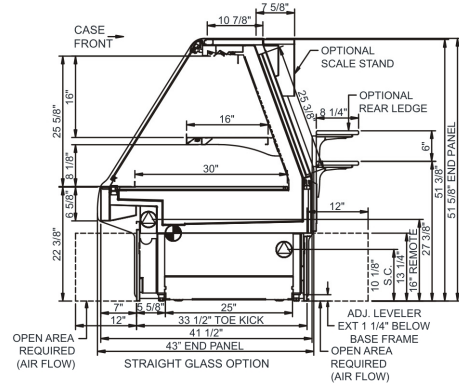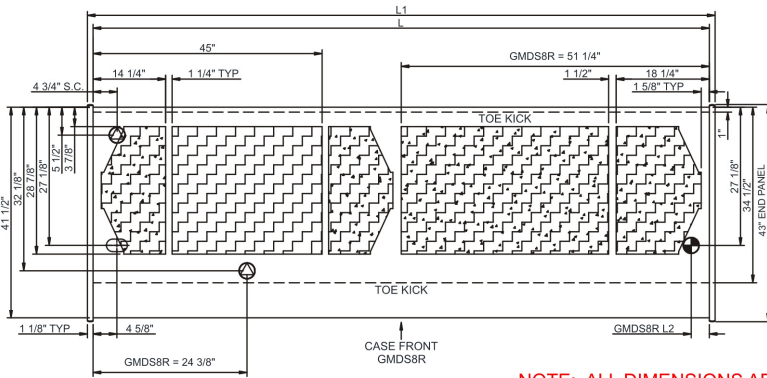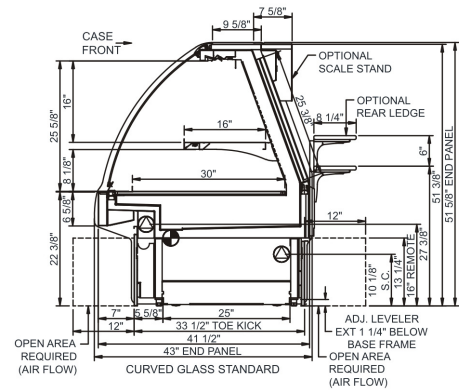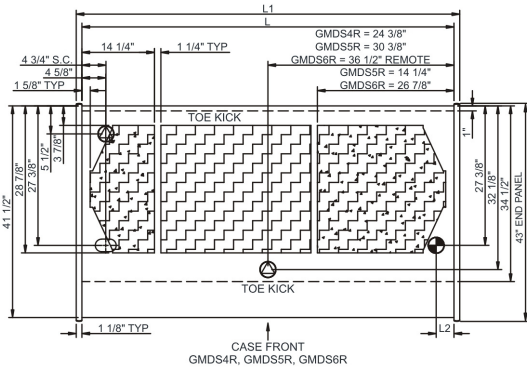

 ELECTRICAL JUNCTION BOX
(SUPPLIED WITH 6" LEADS OR POWER CORD).

 LOCATION OF DRAIN TUBE FOR REMOTE REF.
ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).

 REFRIGERATION LINE CONNECTION.

 REMOTE FLOOR SINK & UTILITIES ACCESS AREA.

 SELF-CONTAINED CASE SERVICE ACCESS AREA.

 DRY CASE SERVICE ACCESS AREA.

Model Technical Specifications																
Model	L"	L1"	L2"	System Circuit Volts			Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	Conv. Rack BTUH	Para. Rack BTUH	Est Wt
GMDS4R	48.75	51.00	3.50	Remote(Type I)	Circuit #1	110-120	1	60	2.27	234	2+G	Leads Multiple	20.00	1296	1200	950
				Remote(Type I)	Circuit #1	110-120	1	60	2.27	234	2+G	Leads Multiple	20.00	1296	1200	
				Self-Contained	Circuit #1	110-120	1	60	10.22	779	2+G	5-15P or L5-15P	N/A	N/A	N/A	
GMDS5R	60.63	62.88	3.50	Remote(Type I)	Circuit #1	110-120	1	60	2.98	288	2+G	Leads Multiple	20.00	1728	1600	1,000
				Remote(Type I)	Circuit #1	110-120	1	60	2.98	288	2+G	Leads Multiple	20.00	1728	1600	
				Self-Contained	Circuit #1	110-120	1	60	12.00	1,031	2+G	5-15P or L5-15P	N/A	N/A	N/A	
GMDS6R	73.13	75.38	3.50	Remote(Type I)	Circuit #1	110-120	1	60	3.35	338	2+G	Leads Multiple	20.00	2030	1880	1,300
				Remote(Type I)	Circuit #1	110-120	1	60	3.35	338	2+G	Leads Multiple	-	2030	1880	
				Self-Contained	Circuit #1	110-120	1	60	14.82	1,071	2+G	5-20P or L5-20P	N/A	N/A	N/A	
GMDS8R	97.50	99.75	9.00	Remote(Type I)	Circuit #1	110-120	1	60	3.84	408	2+G	Leads Multiple	20.00	2722	2520	1,600
				Remote(Type I)	Circuit #1	110-120	1	60	3.84	408	2+G	Leads Multiple	20.00	2722	2520	
				Self-Contained	Circuit #1	110-120	1	60	16.00	1,360	2+G	5-20P or L5-20P	N/A	N/A	N/A	

*** Does not include electric defrost on freezer models.

All Models	Accordance with AHRI Std 1200 ETL Listed to UL 471 ETL Listed to CAN/CSA 22.2 No. 120 ETL Sanitation to NSF 7
------------	---



In Accordance with
AHRI Std 1200

DOE 2017
Energy Efficiency
Compliant

- 1) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle
- 2) 45" minimum door entry clearance required (without shipping skid).
- 3) Units are supplied with levelers. They must be adjusted during installation to ensure the unit is level and plumb. Dimensions reflect levelers extended 1 1/4".

⚠ WARNING: This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.