



# CVAP® HOLDING CABINETS

# HOV5

## HOV5 SERIES

HOV5-04HP | HOV5-04UV | HOV5-05SP | HOV5-05UV | HOV5-14SP | HOV5-14UV

CVap Holding Cabinet: Includes C-Touch Control, HACCP Temperature Downloads, and Convection Holding.

### SHORT FORM SPECS

Shall be Winston CVap Holding Cabinet, model \_\_\_\_\_. Unit to utilize a C-Touch control with processor to control calibration-free thermistors to adjust evaporator and air temperatures in 1°F increments. Features must include a minimum of eight programmable channels which are lockable, USB HACCP download for temperature monitoring and convection fan.

### CONFIGURATIONS

**Countertop:** Shallow depth to allow placement on standard 30" countertop. Also can be fitted with 1" wheels for under counter use.

**Half-Sized:** Easily mobile versions, allowing operator to see over cabinet when transporting. Most half-sized units are also stackable for increased versatility. Some versions available for under counter use with 1" wheels.


**Full-Sized:** Provides maximum capacity for high volume operators.

### CVAP ADVANTAGE

The original humidified holding cabinet is still the best. CVap technology uses dry and vapor heat, in tandem, to control food temperature, and maintain it as moist or crisp as you want. Learn more at [winstonfoodservice.com](http://winstonfoodservice.com).



Model Shown: HOV5-05UV Stacked

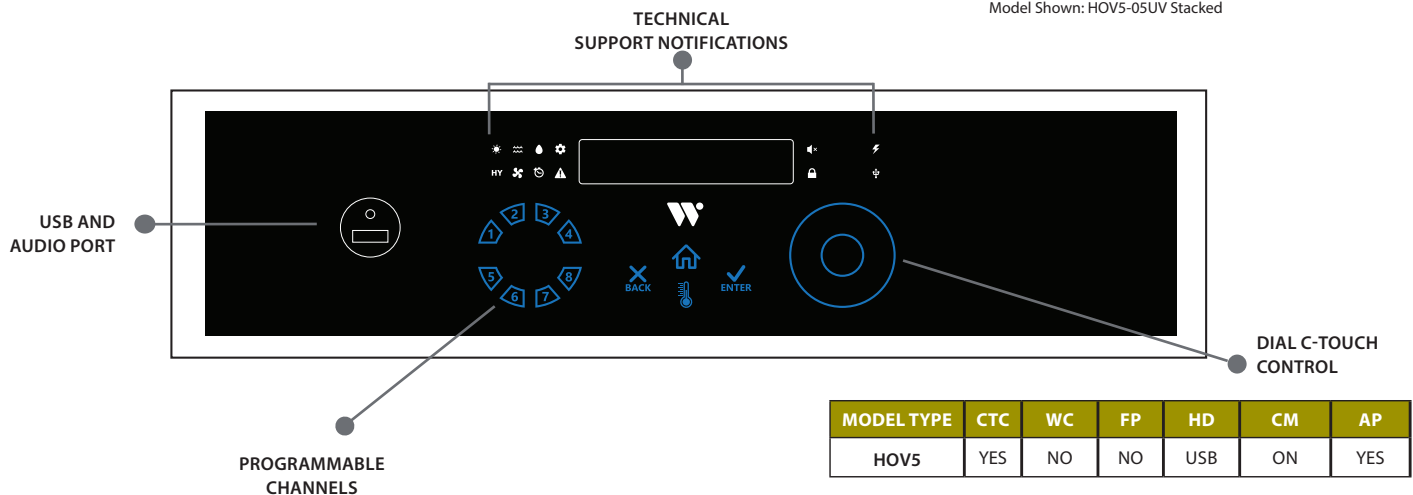

CTC - C-Touch Control      HD - HACCP Temp Download  
 WC - Wireless Connectivity      CM - Convection Mode  
 FP - Food Probe Ready      AP - Audio



WINSTON FOODSERVICE

2345 Carton Drive | Louisville, KY 40299 USA | [winstonfoodservice.com](http://winstonfoodservice.com) | 800.234.5286 | +1.502.495.5400

Specifications subject to change without notice.

**Cabinet Specifications**

HOV5-04HP | HOV5-04UV | HOV5-05SP | HOV5-05UV | HOV5-14SP | HOV5-14UV

**MODEL NUMBER DESCRIPTIONS**
**EQUIPMENT TYPES**

 HO = HOLDING  
 CH = COOK/HOLD  
 RT = RETHERM  
 UB = UNIVERSAL BIN

**SERIES**
**PAN CONFIGURATION**
**PAN CONFIGURATIONS**

 HP = HALF PAN  
 SP = SHEET PAN  
 UV = UNIVERSAL

**EQUIPMENT TYPE**
**TECHNOLOGY**
**PAN CAPACITY**

|           | CAPACITY*                |                               |                                 | EXTERIOR DIMENSIONS** |                  |                  | ELECTRICAL |       |       |       |                                                                                           |              |                        |
|-----------|--------------------------|-------------------------------|---------------------------------|-----------------------|------------------|------------------|------------|-------|-------|-------|-------------------------------------------------------------------------------------------|--------------|------------------------|
| MODEL #   | SHEET PAN<br>(18" x 26") | HALF SHEET PAN<br>(18" x 13") | HOTEL PAN<br>(12" x 20" x 2.5") | HEIGHT<br>IN.(MM)     | DEPTH<br>IN.(MM) | WIDTH<br>IN.(MM) | VOLTS      | PHASE | WATTS | AMPS  | NEMA***                                                                                   | INT'L        | SHIP WEIGHT<br>LBS(KG) |
| HOV5-04HP | N/A                      | 4                             | 4                               | 36.38(924)            | 26.45(672)       | 20(508)          | 120        | 1     | 1408  | 11.75 | 5-20P  | Call Factory | 160 (73)               |
| HOV5-04UV | 4                        | 8                             | 8                               | 35.70(907)            | 34.23(869)       | 27.70(704)       | 120        | 1     | 2292  | 19.1  | 5-20P  | Call Factory | 198(90)                |
| HOV5-05SP | 5                        | 10                            | 5                               | 39.22(996)            | 34.23(869)       | 24.70(627)       | 120        | 1     | 2292  | 19.1  | 5-20P  | Call Factory | 235(107)               |
| HOV5-05UV | 5                        | 10                            | 10                              | 39.22(996)            | 34.23(869)       | 27.70(704)       | 120        | 1     | 2292  | 19.1  | 5-20P  | Call Factory | 250(113)               |
| HOV5-14SP | 14                       | 28                            | 14                              | 73.02(1855)           | 34.23(869)       | 24.70(627)       | 120        | 1     | 2292  | 19.1  | 5-20P  | Call Factory | 394(179)               |
| HOV5-14UV | 14                       | 28                            | 28                              | 73.02(1855)           | 34.23(869)       | 27.70(704)       | 120        | 1     | 2292  | 19.1  | 5-20P  | Call Factory | 420(190)               |

\*Capacity- Determined by 3.5" (89mm) adjustable spacing, with a load limit of 65lb (29.25kg) per rack. | \*\*Exterior Dimensions- Based on use of standard supplied 3" Heavy Duty plate casters. Subtract 2.37" (60mm) for 1" wheels, add 2.14"(54mm) for 5" casters, add 0.17"(4mm) for 4" legs, and add 2.17"(55mm) for 6" legs. | \*\*\*NEMA- Supplied with 84" (2134mm) (minimum) power cord and plug. The input average of current did not exceed the allowable amperage for the circuit listed.

**CONTROL:** C-Touch control with vapor and air temperatures to be adjusted in 1°F increments. Processor controlled calibration-free thermistors, accurate within +/- 2°F. Control allows for eight programmable (and lockable) channels, accommodates software updates via USB.

**MATERIALS:** To be commercial and institutional grade stainless steel interior and exterior.

**DOORS:** Insulated field-reversible door with magnetic handles. Full-sized units to include two dutch doors. Doors may be specified with windows, pass-through, or a combination of both.

**WATER FILL:** Operated manually with low water detection. Auto-fill optional. Low mineral potable water recommended, otherwise use deionizer/demineralizer to minimize corrosion damage.

**INSTALLATION REQUIREMENTS:** Units to be installed with 2" (51mm) clearance on sides and may not be installed within proximity to anything omitting heat that would allow the exterior of the Winston cabinet to exceed surface temperatures of >200°F. Refer to owner's manual for specific installation requirements.

**INDUSTRY COMPLIANT:** Equipment complies with domestic and most international requirements; such as UL, C-UL, UL Sanitation, CE, MEA, EPA202, and others.

**WARRANTY:** Limited one-year warranty (excludes gaskets, lamps/lights, hoses, power cord, glass panels, and evaporator). Warranty disclaimer for improper cleaning, installation, and/or maintenance. Ask for complete warranty disclosure.

**SPECIFY THE FOLLOWING WHEN ORDERING:**
**Standard** (No additional cost):

1. Hinge Preference: Left or right hinge
2. 3" Plate Casters

**Optional** (Additional cost):

- 5" Plate Casters
- Locking Door\*\*
- Pass Through
- Pass Through - Glass
- Bumper Guard Base \*\*\*
- Extended Warranty
- Transport Package\*\*\*
- Reinforced Top\*\*\*\*
- 1" Wheels\*
- Glass Door
- 4" Legs\*
- 6" Legs
- Auto Water Fill
- Cord Wrap
- Flip Up Door \*\*\*\*\*

\* 04 models only.

\*\* Quantity of 1 for reach in. Quantity of 2 for pass through Customer to provide padlock(s). (per door)

\*\*\* Not available for 04-HP models.

\*\*\*\* Available for 04UV & 05UV only.

\*\*\*\*\* Available for 05UV only.

**Accessories & Supplies** (Additional cost):

- PS2206-4 Wire rack-chrome (4-pack) \*
- PS2206-5 Wire rack-chrome (5-pack) \*
- PS2938-4 Wire rack-stainless steel (4-pack) \*
- PS2980-2 Wire rail (2-pack)
- PS2935-2 Wire rail - 04HP (2-pack)
- PS2429 External water filter for auto water fill
- PS2696 Mobile water removal system
- PS3171 Leg and shelf kit for 04UV and 05UV
- PS3174 Stacking kit for 04UV and 05UV
- PS3167 Drain kit for stacked pair
- AC1005 4.25" top extension (14UV model only)
- AC1006 8.125" top extension (14UV model only)

\* Not available for 04-HP models.

**FOR WINSTON SERVICE PARTS, ACCESSORIES, AND SUPPLIES ONLINE!**
[foodservice.winstonind.com/parts-supplies](http://foodservice.winstonind.com/parts-supplies)