



DXPCSRFF156

Series DXPCSR aluminum can storage racks.

FRAME

The vertical corner uprights and the top and bottom cross bracing are constructed of all welded 1-1/2" x 1-1/2" x 1/8" thick extruded aluminum angles. The front and rear center uprights are 1-1/2" wide x 1/4" thick aluminum, welded to the top and bottom cross braces.

GUIDES

The guides are 1" x 2" x 1/8" thick, formed aluminum angles with front and rear edges turned up 1". The guides are welded to the uprights on 7-1/4" centers to accommodate No. 10 cans, with the rear of the guide 1-1/2" higher than the front to allow the cans to roll forward.

MODEL DXPCSR-84


The unit is mobile, mounted on four 5" diameter, heavy duty, swivel casters. The top is 16 ga. stainless steel with all edges turned down 1-1/2", securely fastened to the frame. This unit is loaded from the rear.

MODEL DXPCSR-210

The unit is stationary, mounted on four adjustable flanged feet welded to the uprights. The top is .060" thick aluminum with all edges turned down 1-1/2", welded securely to the uprights. This unit is loaded from the rear.

MODEL NUMBER

- DXPCSR84
- DXPCSR210
- DXPCSR308
- DXPCSRFF156

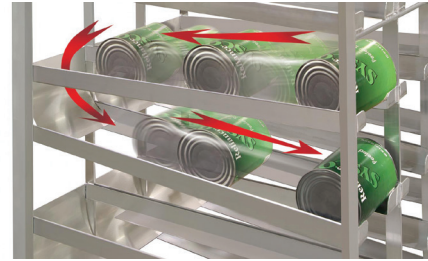

DXPCSR-FF-156
Front Loading
System

MODEL DXPCSR-308

The unit is the same as Model DXPCSR-210, except that it is constructed to accommodate No. 5 cans. The guides are set on 5-3/16" centers in lieu of 7-1/4". This unit is loaded from the rear.

MODEL DXPCSR-FF-156

The unit is the same as Model DXPCSR-210 except that it is front loading. The loading guides are inclined to the rear, where an aluminum deflector transfers the cans to unloading guides below which are inclined towards the front. Used where installation prevents rear loading.

MODEL #	DIMENSIONS			CAPACITY CANS	WEIGHT (LBS.)
	W	D	H		
DXPCSR84	25-3/4"	42-1/2"	40-3/4"	84 #10 cans	135
DXPCSR210	25-3/4"	42-1/2"	86-1/2"	210 #10 cans	200
DXPCSR308	25-3/4"	42-1/2"	72-3/4"	308 #5 cans	230
DXPCSRFF156	27-1/4"	42"	81-1/16"	156 #10 cans	200

NOTE: Other sizes and capacities available.

Legs standard on DXPCSR-210, DXPCSR-308, & DXPCSR-FF-156.

OPTIONS / ACCESSORIES

Option	Description
<input type="checkbox"/> DXPY5	5" Polyurethane Casters (set of 4)
<input type="checkbox"/> DXPWB	Wheel Brakes (set of 2)

LIMITED WARRANTY: DINEX warrants to the original purchaser parts and labor for a period of twelve (12) months from the date of purchase. See manufacturer's complete warranty for details.

It is our policy to build equipment which is design certified by companies that have been accredited at the Federal Level by the Occupational Safety and Health Agency (OSHA) and ANSI as a National Recognized Testing Laboratory. These companies include CSA International, Underwriters Laboratories, and the National Sanitation Foundation. However, a continuing program of product improvement makes it necessary to submit new models to the agencies as they are developed. Consequently, all models may not bear the appropriate labels at all times.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Information is not for design purposes.

We do not accept returns on any Dinex equipment or Dinex custom products. Please contact your local Dinex rep to ensure order accuracy prior to ordering.