


# THERMOMETERS

**NSF** TMT-SERIES  
as indicated



TMT-HH1

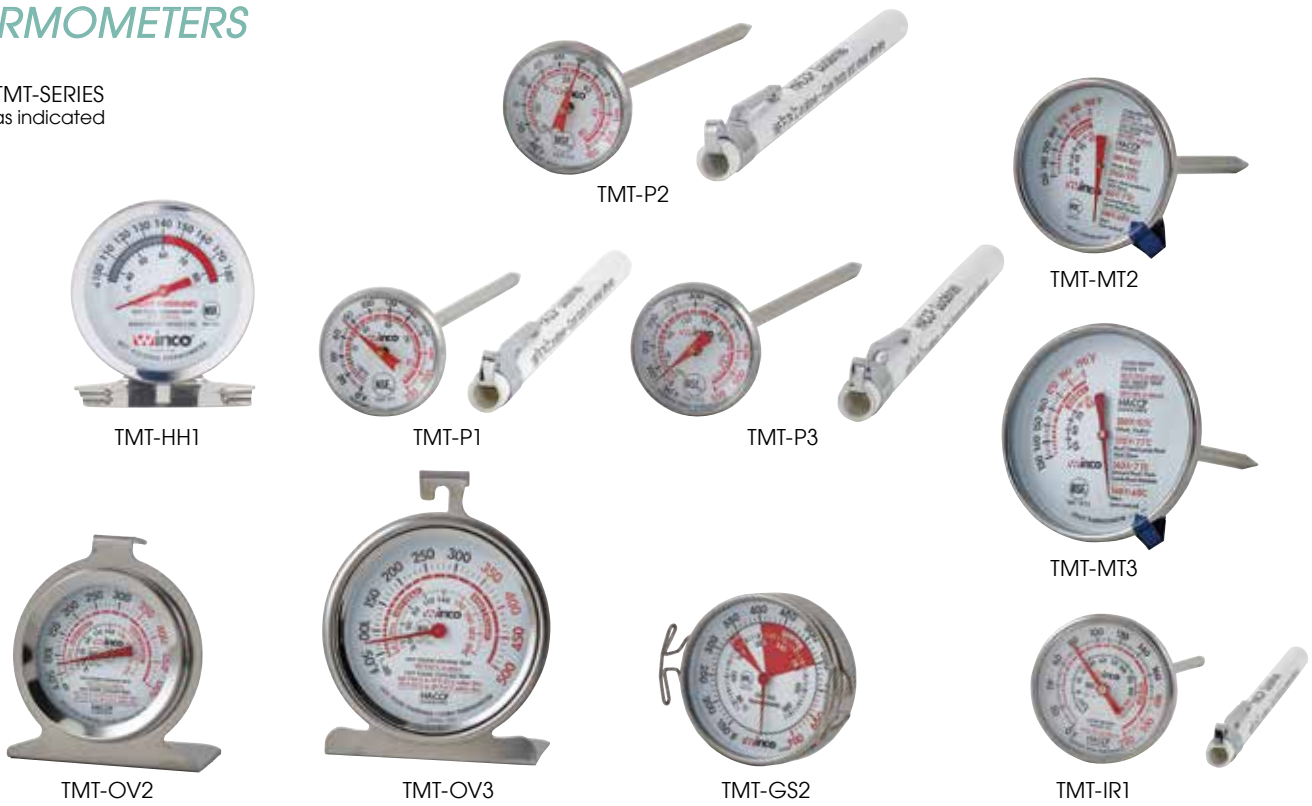

TMT-P2



TMT-MT2



TMT-P1



TMT-P3



TMT-MT3



TMT-OV2



TMT-OV3



TMT-GS2



TMT-IR1

## HOT HOLDING

◆ Hang or stand-alone

ITEM	NSF	TEMPERATURE RANGE	DIAL FACE	GUIDELINE ON DIAL	UOM	CASE
TMT-HH1		100° - 180°F; 38° - 82°C	2" Dia	HACCP	Each	12/96

## POCKET TEST

◆ Includes protective sleeve with built-in clip

◆ Calibrate for accuracy

ITEM	NSF	TEMPERATURE RANGE	DIAL FACE	PROBE	GUIDELINE ON DIAL	UOM	CASE
TMT-P1		0 - 220°F; -18 - 104°C	1" Dia	5"L	HACCP	Each	12/72
TMT-P2		-40 - 180°F; -40 - 80°C	1" Dia	5"L	HACCP	Each	12/72
TMT-P3		50 - 550°F; 10 - 288°C	1" Dia	5"L	HACCP	Each	12/144

## MEAT

◆ Hand held with adjustable indicator

ITEM	NSF	TEMPERATURE RANGE	DIAL FACE	PROBE	GUIDELINE ON DIAL	UOM	CASE
TMT-MT2		130 - 190°F; 55 - 85°C	2" Dia	5"L	HACCP	Each	12/144
TMT-MT3		130 - 190°F; 55 - 85°C	3" Dia	5"L	HACCP	Each	12/72

## OVEN

◆ Hanging hook and standing panel are built-in

ITEM	NSF	TEMPERATURE RANGE	DIAL FACE	GUIDELINE ON DIAL	UOM	CASE
TMT-OV2		40 - 500°F; 10 - 260°C	2" Dia	HACCP	Each	12/144
TMT-OV3		40 - 500°F; 10 - 260°C	3" Dia	HACCP	Each	12/144

## GRILL FACE

◆ Flat surface for grill-top

ITEM	NSF	TEMPERATURE RANGE	DIAL FACE	UOM	CASE
TMT-GS2		150 - 700°F; 70 - 370°C	2" Dia	Each	3/144

## INSTANT READ

◆ Includes protective sleeve with built-in clip

◆ Calibratable for accuracy

ITEM	NSF	TEMPERATURE RANGE	DIAL FACE	PROBE	GUIDELINE ON DIAL	UOM	CASE
TMT-IR1		0 - 220°F; -18 - 104°C	1-3/4" Dia	5"L	HACCP	Each	12/72