

# SCFT-NU

Mobile Self-Contained Frost Top Serving Counter

Project \_\_\_\_\_  
 Item \_\_\_\_\_  
 Quantity \_\_\_\_\_  
 CSI Section 11400  
 Approved \_\_\_\_\_  
 Date \_\_\_\_\_

## Models

- SCFT-36-NU - 36" Mobile frost top serving counter without understorage
- SCFT-50-NU - 50" Mobile frost top serving counter without understorage
- SCFT-60-NU - 60" Mobile frost top serving counter without understorage
- SCFT-74-NU - 74" Mobile frost top serving counter without understorage
- SCFT-96-NU - 96" Mobile frost top serving counter without understorage



SCFT-74-NU

## Standard Features

- Stainless steel exterior body and top
- Galvanized bottom
- Frost top is one piece stainless steel construction; perimeter drain with valve located at bottom of unit standard
- 18" x 26" sheet pan can rest on frost top
- On/off switch located on exterior of unit
- SCFT units are standard with enclosed base
- Environmentally friendly R404A refrigerant
- A maximum 10' long cord and plug
- All exterior panels reinforced with overlapping corners, welded in place
- All body cutouts reinforced with channel supports
- All units are standard on 5" diameter polyurethane swivel casters for easy cleaning
- Easy to use stainless steel interlock system is standard on base and tray slides
- Environmentally friendly HFC-404A refrigerant
- One year parts and 90 day labor standard warranty

## Options & Accessories

- Tray slides and work shelves
  - 10" (25cm) wide composite fold-down cutting boards
  - Line-up interlock device
  - Food shields
  - Glass-front counter protector
  - 12" (30cm) wide stainless steel overshef
  - Fluorescent or incandescent light fixtures\*
  - Open understorage with shelf
  - 120V/60Hz/1ø, 10 amp convenience outlet with breaker\*
  - Dry storage compartment
  - Stainless steel trim strips
  - 14" x 30" (36cm x 76cm) stainless steel end drop shelf
  - 6" (15cm) high adjustable stainless steel legs in lieu of casters
  - Laminate exterior panels in lieu of stainless steel exterior panels
- \* Inclusion of these options will alter the electrical specifications of unit

## Specifications

**Exterior body** is constructed of stainless steel side panels and galvanized bottom. All exterior side panels are reinforced with overlapping corners and are welded in place. All body cutouts are reinforced with galvanized channel supports.


**Exterior top** is constructed of stainless steel, welded, ground and polished into one integral unit. Top is fabricated with square exterior corners.

**Frost top** is stainless steel, one-piece construction and perimeter trough. Underside of frost top is sealed with refrigeration lines and insulated with high-density, closed cell environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane. Frost top assembly is enclosed in a galvanized steel jacket. The frost top is separated from the exterior top by a thermal break.

**Refrigeration system** uses HCFC-404a refrigerant and has a self-contained 115 volt, 60 Hertz, single phase hermetically sealed condensing unit. Unit is wired with a 3-wire, grounded, maximum 10' (3m) cord and plug. Unit has an on/off switch mounted on the exterior.

**Casters:** Unit is mounted on 5" (13cm) diameter swivel casters with non-marking polyolefin tires and plate brakes. Overall height of caster assembly is 6.00" (15cm).



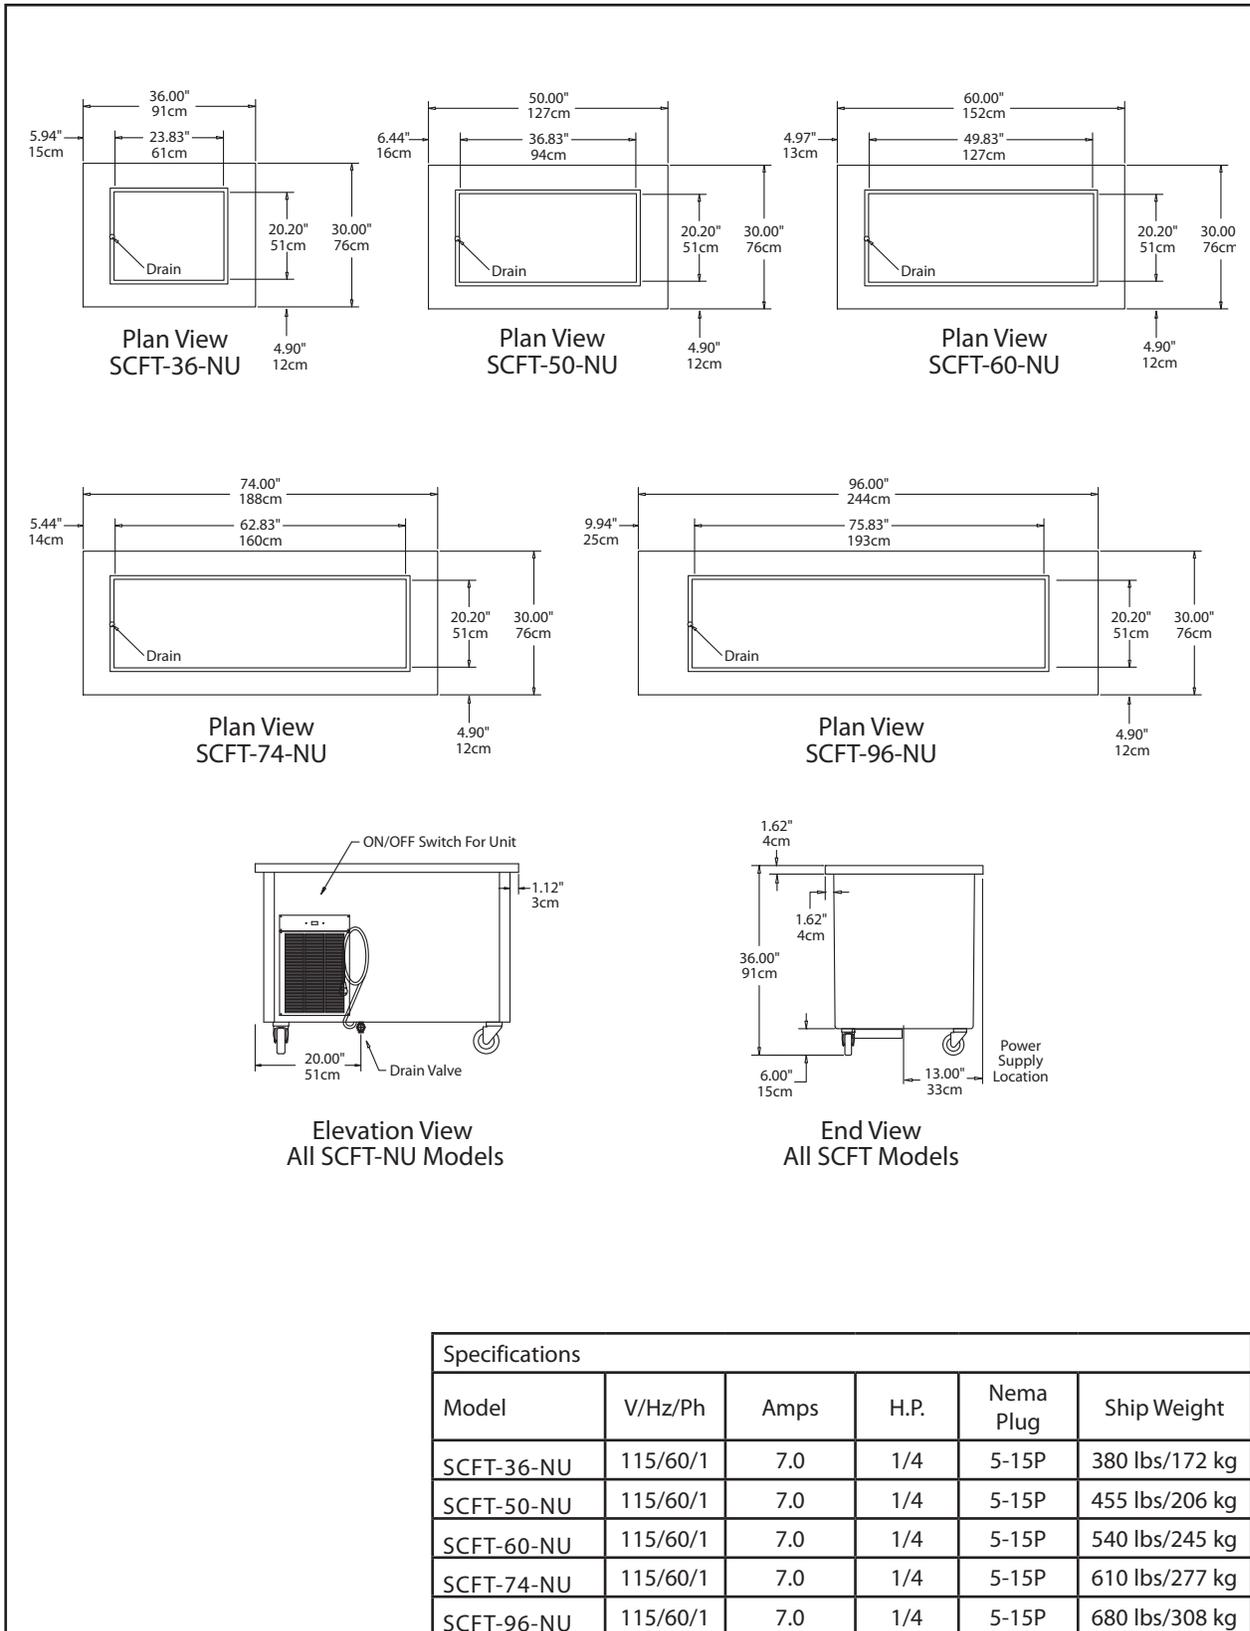

Delfield reserves the right to make changes to the design or specifications without prior notice.