

# VICTORY<sup>®</sup>

## ULTRASPEC

PROJECT: \_\_\_\_\_

ITEM # \_\_\_\_\_ QTY: \_\_\_\_\_

MODEL # \_\_\_\_\_

AIA # \_\_\_\_\_ SIS # \_\_\_\_\_

### BLAST CHILLING / SHOCK FREEZING / THAWING

## VBCFT-20-200PU

BLAST CHILLING / SHOCK FREEZING / THAWING



### CABINET CONSTRUCTION

- Stainless Steel Exterior And Interior (with rounded interior corners)
- Stainless Steel Door Liner
- Die-Formed Leak-Proof Floor
- High Density, Polyurethane Insulation
- Anti-Condensation Resistance, Placed On The Door Under The Gasket
- Hinged Door With Gasket And Closing Ramp System
- Ergonomic Vertical Door Handle
- Thick Stainless Steel Internal Bumper To Avoid Damage Caused By The Cart
- Maximum Interior Dimensions For Carts: 30.9"W x 37"D x 75.5"H
- Circuit Breaker For Compressor Protection

### FEATURES

- 5" High-Definition, Easy-To-Use Touch Display
- Blast Chilling, Shock Freezing And Thawing Modes
- Photo Identifiable Mode Settings
- Customized Blast Chilling, Blast Freezing And Thawing Cycles (320 cycles can be memorized)
- USB Connection For Uploading And Downloading Data And Recipes
- Heated Core Probe, With 4 Measuring Points
- Pre-Cooling Function

### REFRIGERATION

- Self-Contained Refrigeration System Uses R404 Refrigerant To Comply With All Environmental Concerns
- Copper-Aluminum Evaporator With Anti-Corrosion Treatment
- High-Ventilation Evaporator To Ensure The Highest Efficiency Of The Cooling System
- Evaporator Installed On The Back With Accessible Cover And Adjustment Of The Speed Of The Evaporator Fans



- ▶ 3 Year Parts & Labor Warranty
- ▶ Plus An Additional 2 Year Compressor Warranty
- ▶ Exclusive 2 Year Warranty On Magnetic Door Gaskets

### OPTIONS & ACCESSORIES

- Single Sensor Probe



Please verify qualifying units by visiting:  
[www.energystar.gov/cfs](http://www.energystar.gov/cfs)


3779 Champion Blvd, Winston-Salem, NC 27105

ph: (888) 845-9800 | fax: (800) 253-5168

Sales@VictoryRefrigeration.com | VictoryRefrigeration.com

Rev. 8/17/21 Printed in U.S.A.

APPROVAL: \_\_\_\_\_ DATE: \_\_\_\_\_

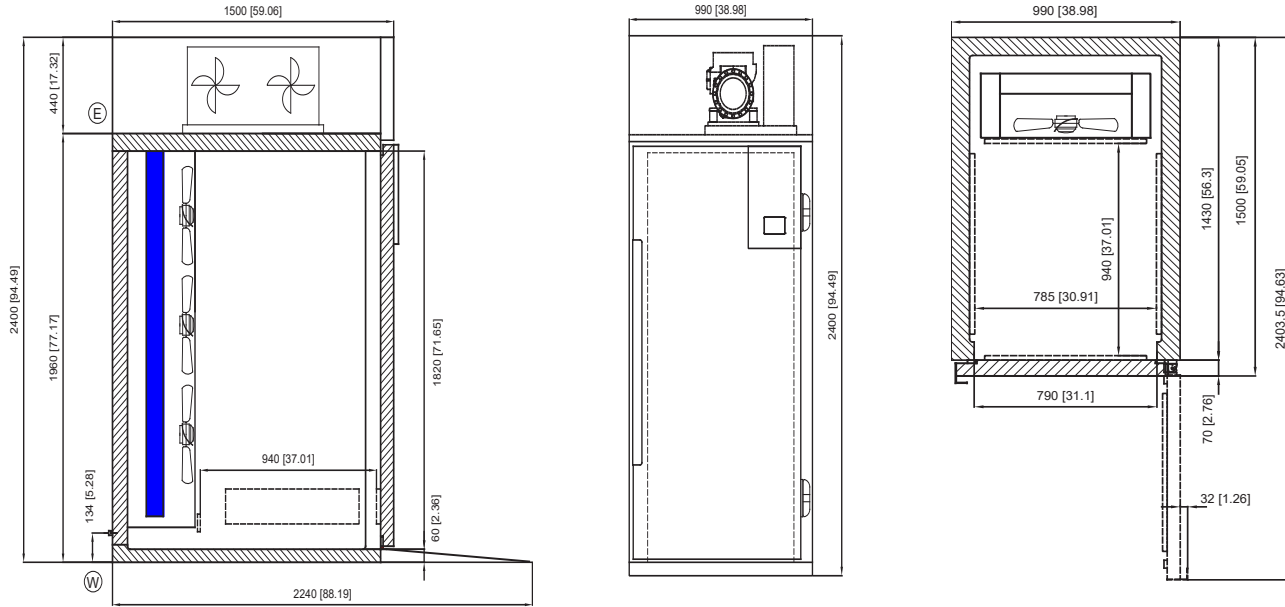

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM)

12" Top and 3" rear clearance is required

CHARACTERISTICS		REFRIGERATION DATA		SHIPPING DETAILS	
Width, Overall (in.)	38.98"	Condensing Unit Size, HP*	2.8	Height	101"
Depth, Overall (with handle)	64.18"	Refrigerant*	R404	Width	49"
Height Overall (in.)	94.49"	Capacity (BTU/HR) (95°F/14°F)	23,461	Depth	69"
Width, Door Opening 90°	94.63"	PAN COUNT & PERFORMANCE		Crated Weight	1416 lbs
Carts (not included)	1 GN2/1	Chilling Capacity In 90 Min	187 lbs		
<b>ELECTRICAL DATA</b>		Freezing Capacity In 240 Min	88 lbs		
Cabinet Voltage	208-240/60/3	Climate Class	4		
Total Amperes	23.8				
NEMA Plug (8' cord)	15-30P				

3779 Champion Blvd, Winston-Salem, NC 27105 | ph: (888) 845-9800 | fax: (800) 253-5168

Sales@VictoryRefrigeration.com | VictoryRefrigeration.com

Rev. 8/17/21 Printed in U.S.A.

an Ali Group Company



The Spirit of Excellence