DESIGNER LINE REFRIGERATOR/FREEZER

Model: D3RFFESN

Natural Refrigerant R-290 Model

3-Section Dual Temp Extra-Wide Reach-In Refrigerator/Freezer (0°F) -Shallow Depth

D3RFFESN - Stainless steel front, aluminum end panels and interior **D3RFFESNSA** - Stainless steel exterior, aluminum interior

D3RFFESNSS - Stainless steel exterior and interior



Options and Accessories

(upcharge and lead times may apply)

Stainless steel case back	Custom laminates	
Additional epoxy coated steel shelves	Special electrical req. (consult factory)	
Chrome or stainless steel shelves	Correctional Facility Options	
Rehinging of doors (consult factory)	One way security screws	
Pan slide assemblies	Locking hasp (lock not included)	
Wine rack (refrigerator section)	Stainless steel mesh cover	
Casters	Coverless hinges	
Half doors		

Consult factory for other model configurations, options and accessories.

Project Name:	
Model Cresified	
Model Specified:	
Location:	
Item No:	Quantity:
AIA #:	SIS #:

Standard Model Features

REFRIGERATION SYSTEM

Separate, self contained, performance rated refrigeration systems (coil housing in cabinet zones)

Natural, environmentally safe, high efficiency R-290 refrigerant¹

Expansion valve system

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation

Smooth, polished chrome workflow door handles

Cam action, lift off hinges

Self-closing doors

Magnetic snap in Santoprene™ door gaskets

Cylinder lock in each door

Heavy duty, epoxy coated steel shelves

Heavy duty pilaster strips

Adjustable 6" stainless steel legs

MODEL FEATURES

LED interior lighting

Electronic controllers with digital display & hi-low alarm

Off-cycle defrost (refrigerator section)

Automatic electric defrost (freezer section)

¹ R-290 refrigerant meets all federal and state regulatory requirements.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

Model Specifications

and the second s	
DIMENSIONAL DATA	
Net Capacity (cubic feet)	50/21 (1416/595 cu I)
Width, Overall (inches)	85 ½ (2172 mm)
Depth, Overall (inches) (including handles)	29 ½ (743 mm)
Depth (inches) (less doors)	25 % (657 mm)
Depth (inches) (doors open 90°)	51 1/8 (1299 mm)
Clear Door Width (inches)	21 7/8 (556 mm)
Clear Half Door Height (inches)	27 ½ (699 mm)
Height, Overall (inches) (including 5" casters)	82 ½ (2089 mm)
Number of Doors	3
Number of Shelves	9
Shelf Area (square feet) (per section)	20.4 (1.9 sq m)
REFRIGERANT DATA	
Condensing Unit Size (H.P.)	1/4, 1/2
Capacity (BTU per hour)*	1940 / 2470
ELECTRICAL DATA	
Voltage (International)	115/60/1 (220/50/1)
Feed Wires (including ground)	3/3
Total Amps (International)	5.9 (3.9) / 9.4 (4.4)
Defrost Amps (International)	6.1 (3.2)
(2) 10 ft. Cord/Plug [attach.] (International)	Yes (No)
SHIPPING DATA	
Height - Crated (inches)	85 ½ (2172 mm)
Width - Crated (inches)	90 (2286 mm)
Depth - Crated (inches)	42 (1067 mm)

OTHER HIGH BATA	
Height - Crated (inches)	85 ½ (2172 mm)
Width - Crated (inches)	90 (2286 mm)
Depth - Crated (inches)	42 (1067 mm)
Volume - Crated (cubic feet)	181 (5125 cu I)
Weight Std - Crated (pounds)	885 (401 kg)
Weight SS - Crated (pounds)	995 (451 kg)

- * Rating @ +25°F evaporator, 90°F ambient (refrigerator)
- * Rating @ -15°F evaporator, 90°F ambient (freezer)

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.

Equipped with two NEM

Equipped with two NEMA-5-15P Plugs (varies by country)



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.









© Copyright 2021. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

Model Plan Views

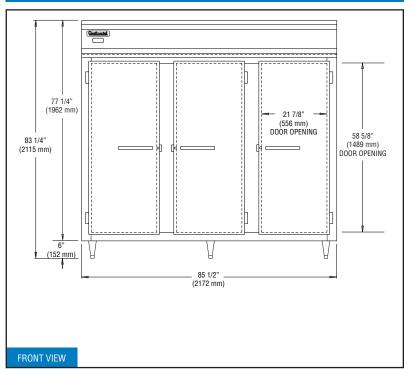

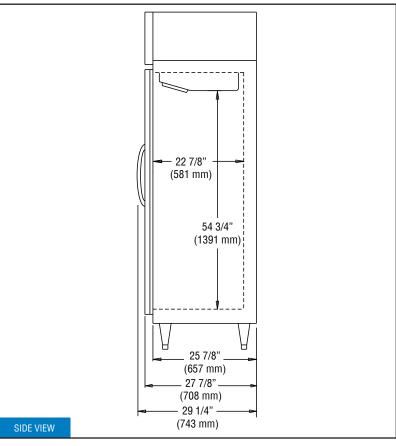

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required on top and 3" on sides and rear.