

Project: _____

Location: _____

Item #: _____ Quantity: _____

Model #: _____

MODEL: **IRR-AGB23CR**

REACH-IN:
Top Mounted Reach-in Refrigerators (Glass Door)



DOE COMPLIANT

General Strengths

- ✓ **Energy efficiency higher.** R290 refrigerant with electric fans, LED lighting and evaporative tray without electric resistances
- ✓ **Sanitation.** The interior cabinet is built with rounded corners (extensive radius for easy cleaning). Quick ability to take off shelves and slides for interior cleaning. Each cabinet has a drain at the bottom of the unit. When cleaning the unit make sure the drain hose is routed to a floor drain.
- ✓ **Doors.** Self-closing door system with permanent pressure. Stay open feature included when door remains open after 95 degrees. All doors include triple chamber door gaskets, easy to remove and snap in. Doors are field reversible, parts not included.
- ✓ **Control systems.** Greater ability for the adjustment of temperature range as per the end user's requirements.
- ✓ **100% Tested.** All condenser units are 100% tested, in helium chambers for refrigerant leak detections.
- ✓ **Certified.** Audited and Certified by INTERTEK for compliance with UL 471 and NSF 7. AENOR audited and certified by internationally recognized firm. ISO 9001:2008 (Quality); ISO 14001:2004 (Environmental); OSHAS 18001:2007 (Prevention and Worker Safety)
- ✓ **Lighting.** LED lighting in the canopy and cabinet sides reduces the energy consumption by 80% to 90% compared to a traditional bulb, better light quality.

Revision: 01 Date: 03/05/2019 IRR-AGB23CR_FT_69_1

MODEL	Dimensions (inches) (mm)			Nº Doors	Nº Shelves	Ref.	Ref. Weight (Lbs.) (gr.)	Temp. Range (°F) (°C)	Capacity (Cu. Ft.) (L)	Cond. Unit. H.P.	Case Amps 115 V.	Crated Weight (Lbs.) (Kg.)
	W	D	H									
IRR-AGB23CR	27	31-1/4	84	1	4	R290	0.28	33°F/38°F	23	1/3	4.1	400
	687	794	2125									

FTL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 - WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE



Infrico USA Corp.
1409 N.W. 84th Avenue
Doral, FL 33126
1.305.777.9599 Office
1.305.777.9598 Fax

www.infrico.us
sales@infrico.com

APPROVALS: _____ AVAILABLE AT: _____

MODEL: IRR-AGB23CR
**REACH-IN:
Top Mounted Reach-in Refrigerators (Glass Door)**
STANDARD FEATURES
➤ Exterior

- AISI 304 Stainless Steel.

➤ Interior

- AISI 304 Stainless Steel,
- Sealed interior floors and rounded cabinet corners,
- LED lighting,
- Internal drain plugs for easy cleaning.

➤ Doors

- Self closing door with stay open feature,
- Door built-in Thermopane double glass and low-e tempered glass,
- Stainless Steel heavy-duty hinges,
- Triple chamber snap in door gaskets for easy removal and cleaning,
- Field reversible door (parts not included),
- Door locks,
- Full-height door opening: 23"x58-5/8" (584x1490 mm).

➤ Insulation

- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in using a high-density polyurethane insulation,
- Low GWP & Zero ODP effect.

➤ Casters

- 4" diameter casters.
- Locks provided on front set.

➤ Shelving

- (4) Four plastic-coated extra-dense wire shelves per door with stainless steel tray slides,
- Dimensions WxD: 20-7/8"x25-5/8" (530x650 mm).
- Tray slides are compatible with 18"x26" (457x660 mm) and 12"x20" (305x660 mm) sheet pans.

➤ Refrigeration

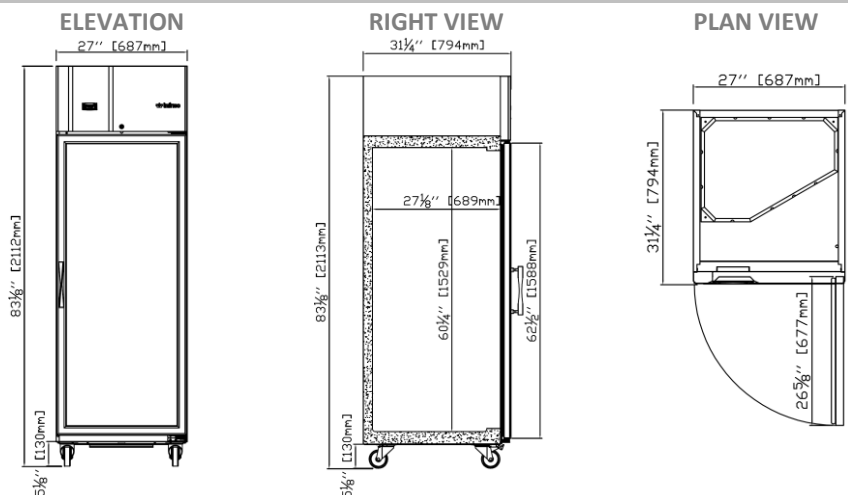
- Digital temperature controller with automatic defrost system,
- Hinged control panel, easy-removable,
- **Compact refrigeration system monoblock, INFRIBLOCK®**,
- Energy-saving non-electric condensate pan,
- Evaporator coil coated with anti-corrosion material 100% Polyester,
- Forced air refrigeration system,
- Expansion valve,
- Electric fans,
- Refrigeration capacity: 2245 Btu/h (14°F) / 658 W (-10°C).

➤ Electrical

- Cord and NEMA 5-15P plug,
- Electrical connection is 115V / 1ph / 60 Hz.
- 15 AMP breakers required,


➤ ETL Listed to UL471 Standard and Sanitation classified to NSF7.
OPTIONAL FEATURES

- ✓ Stainless Steel wire shelf,
- ✓ Additional slide kits,
- ✓ Set of 6" legs, height adjustable from 5" to 8",
- ✓ Electrical connection is: 230V / 1ph / 50 Hz (plug type varies).

PLAN VIEW


ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 - WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE



Infrico USA Corp.
 1409 N.W. 84th Avenue
 Doral, FL 33126
 1.305.777.9599 Office
 1.305.777.9598 Fax

www.infrico.us
sales@infrico.com

APPROVALS: _____ AVAILABLE AT: _____