



AERO 42

VACUUM PACKAGING MACHINE



FEATURES

- 1 seal bar (front): 16.5"
- Double seal (two wires).
- Removable seal bar for cleaning and maintenance purposes
- Pump capacity: 16 m³/h Busch vacuum pump
- Pump maintenance and cleaning program
- Machine cycle: 20-40 sec
- Standard Sensor control with a 3-program memory
- Easy control interface
- Soft air Program
- Liquid control sensor, including inclined insert plate(s)
- External Vac
- Read Meat function
- Deep drawn stainless steel vacuum chamber
- Stainless steel exterior and transparent lid
- Insert plate for a faster cycle and product adjustment
- Service kit for standard maintenance

DESCRIPTION

State of the art, innovative, robust machine with a slick design. Easy control interface. 3 adjustable setting programs. Standard Soft-air. Precise vacuum settings with sensor pressure control. This table-top model complies with CE/UL/ETL standards.


ACCESSORIES/OPTIONS

- Optional without extra costs: Cut-off/Wide seal
- Trolley with shelf
- External hose adaptor for GreenVAC
- GreenVAC containers
- GreenVAC vacuum bags



Henkelman offers standard 3 year warranty

SEAL BAR CONFIGURATION

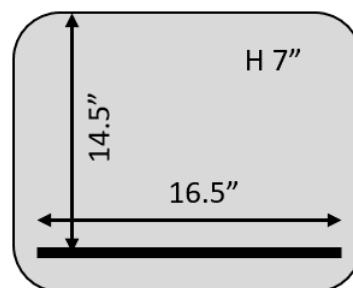

HENKELMAN USA
493 W. Fullerton Ave
Elmhurst, IL 60126
USA


Sales support
P +1 331-979-2013
E info@invacus.com
Service/technical support
P +1 331-979-2013
E info@invacus.com

VACUUM PACAGKING MACHINE

AERO 42 – SPECS

VACUUM PACKAGING MACHINE AERO 42 – SPEC SHEET

DIMENSIONS

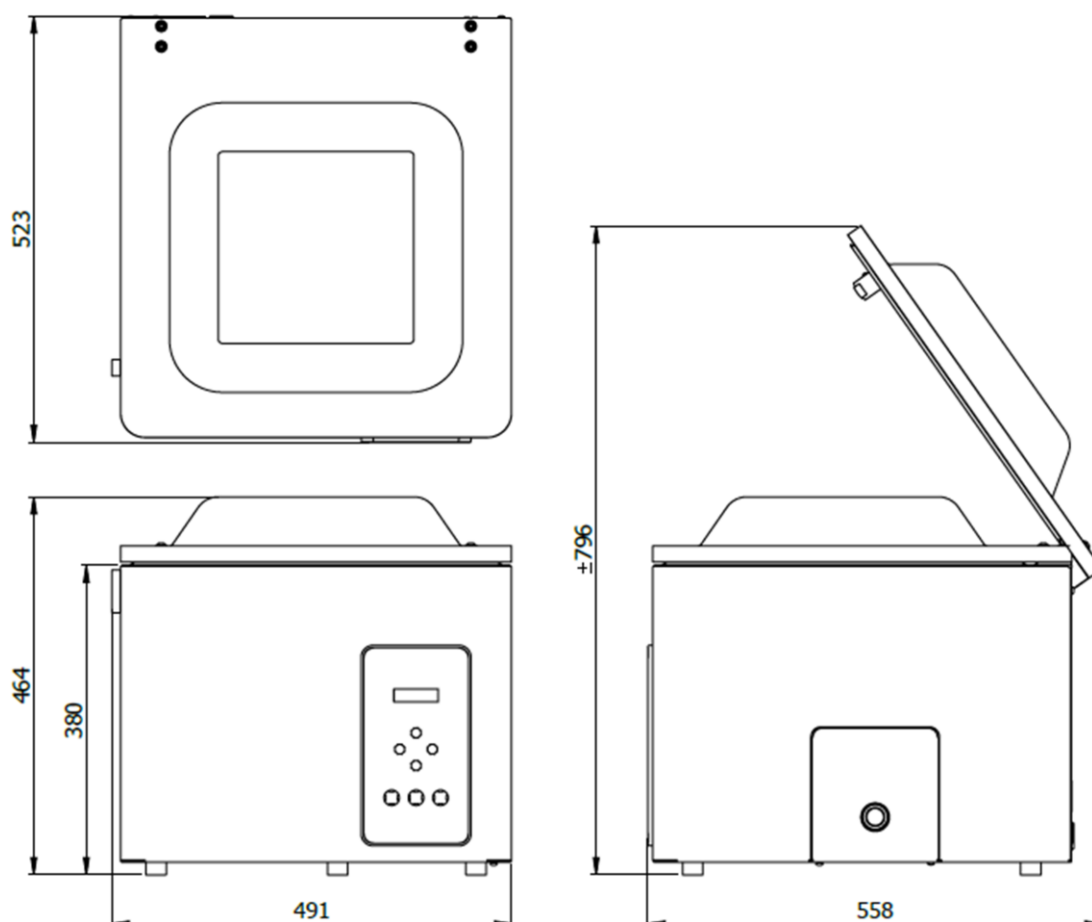

Model	Dimensions (mm)		Voltage* (Hz)	Pump capacity (m³/h)	Power (HP)	Weight (kg)
	Chamber (usable space) L x W x H	Machine L x W x H				
AERO 42	14.5" x 16.5" x 7"	20.6" x 19.3" x 18.2"	110V-1-60	16	0.80	126
8 Amp Plug: NEMA 5-15						



HENKELMAN USA
493 W. Fullerton Ave
Elmhurst, IL 60126
USA

Sales support
P +1 331-979-2013
E info@invacus.com
Service/technical support
P +1 331-979-2013
E info@invacus.com