



CLASSIC

Deli/Pastry Showcase


DELI/PASTRY WITHOUT DRAWERS

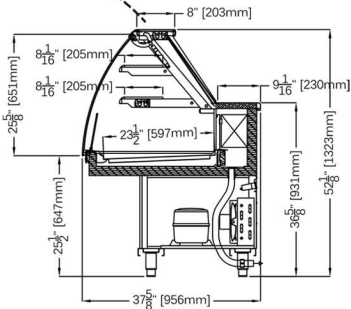

DELI/PASTRY WITH DRAWERS

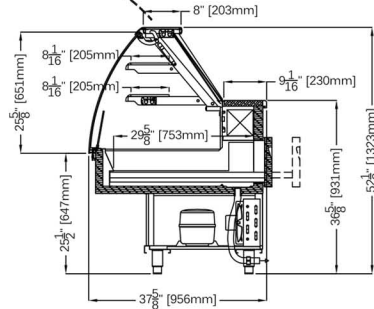

OPTIONAL: COLD STORAGE

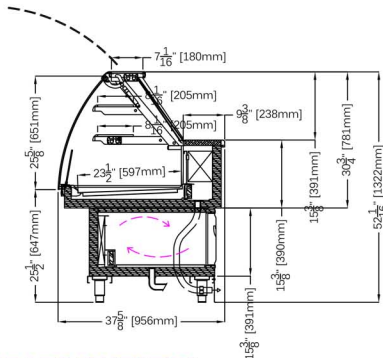

FULLY REFRIGERATED AVAILABLE IN LINEAR MODELS ONLY (PULL OUT DRAWERS NOT AVAILABLE)




Photo shown is with optional front finish and champagne trim finish. Standard cases are silver trim finish, unfinished front, and stainless steel skin sides




STANDARD FEATURES

- Stainless steel insulated body with tubular painted galvanized chassis
- Silver trim finish
- Non-refrigerated shelves
- Dixell digital controller
- Air cooled condensing unit
- Temperature front and side glass single pane with anti-fog serigraph
- Lift up hydraulic front glass
- LED lighting
- Plexiglass sliding doors
- Stainless steel work bench
- Pastry with drawer (static refrigeration)
- Cases ship standard unfinished front and stainless steel skin sides

OPTIONS

- Fully refrigerated shelves (linear models only)
- Marble/Granite work counter
- RAL color finish/wood laminate
- Champagne trim finish
- Roll down curtain
- Remote/water cooled unit
- Matching front cabinetry counters with top glass
- Stainless steel step up deck shelf
- Cold storage option with static refrigeration and separate control
- Casters



90° Open Corner

CLASSIC DELI/PASTRY							
TECHNICAL FEATURES		MODELS					
		CLASSIC CDP1000	CLASSIC CDP1500	CLASSIC CDP2000	CLASSIC CDP2500	CLASSIC CDP3000	CLASSIC CDP490
External Dimensions (L-D-H)	Inches	39 1/2" - 37 3/4" - 52 1/8"	59 1/8" - 37 3/4" - 52 1/8"	78 3/4" - 37 3/4" - 52 1/8"	98 1/2" - 37 3/4" - 52 1/8"	118 1/4" - 37 3/4" - 52 1/8"	80 1/16" - 37 3/4" - 52 1/8"
	Inches-MM	1000 - 956 - 1323	1500 - 956 - 1323	2000 - 956 - 1323	2500 - 956 - 1323	3000 - 956 - 1323	2034 - 956 - 1323
Crated Dimensions (L-D-H)	Inches	44" - 42 1/2" - 57"	65" - 42 1/4" - 57"	84 3/4" - 42 1/4" - 57"	102 3/4" - 42 1/4" - 57"	122 3/4" - 42 1/4" - 57"	86" - 42 1/4" - 57"
	Inches-MM	1100 - 1056 - 1447	1600 - 1056 - 1447	2100 - 1056 - 1447	2600 - 1056 - 1447	3100 - 1056 - 1447	2184 - 1056 - 1447
Power Supply	(V)	120V	120V	120V	120V	120V	120V
BTU'S @ +14°F Evap							
Temperature	BTU'S	1600 BTU'S	2016 BTU'S	2560 BTU'S	3072 BTU'S	3072 BTU'S	2400 BTU'S
Amperage	(A)	5A	5.5A	8.5A	8.6A	11A	5A
Deck Operating Temperature*	°F	39°F	39°F	39°F	39°F	39°F	39°F
Net Weights	Kg/Lb	147Kgs / 323Lbs	186Kgs / 410Lbs	224Kgs / 492Lbs	271Kgs / 596Lbs	314Kgs / 722Lbs	186Kgs / 410Lbs
Crated Weights	Kg/Lb	157Kgs / 297Lbs	200Kgs / 440Lbs	239Kgs / 526Lbs	291Kgs / 640Lbs	334Kb / 734Lbs	200Kgs / 440Lbs

* Dimensions are without side panels

* Any and all shelves above the deck will NOT be refrigerated on these models

* Manufacturer reserves the right to change specifications without notice. Not responsible for error and omissions.



512 South Airport Blvd., South San Francisco, CA 94080
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
sales@oscartek.com | www.oscartek.com

