



RF-4

Project: _____	AIA# _____
Item #: _____ Qty: _____	SIS# _____
Model #: _____	

Rinser Faucet

RF

RF-4, RF-6

Standard Features

- Stainless steel construction

Specifications

Plumbing

- Accepts 3/8" cold water lead
- 1.2 gallons per minute
- NSF/ANSI 372 listed for low lead compliance

03012383
Rinser Faucet
Assembly




Intertek
4004503
Conforms to NSF/ANSI STD 372

Rinser Faucet Installation Notes


- Unit does not provide a 1" air gap
- Must be installed with external backflow prevention to meet applicable federal, state, and local plumbing code requirements.
- Install in-line water pressure regulator (included)
- A separate shut-off valve is recommended (not included)

Drawings

RF-4

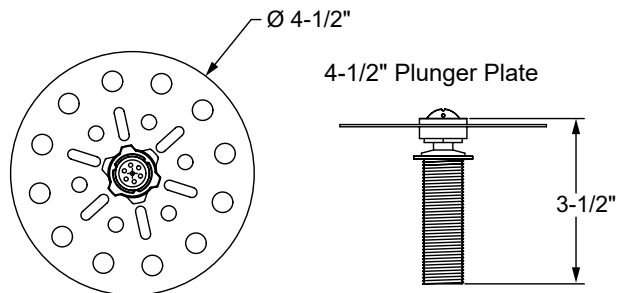

RF-6

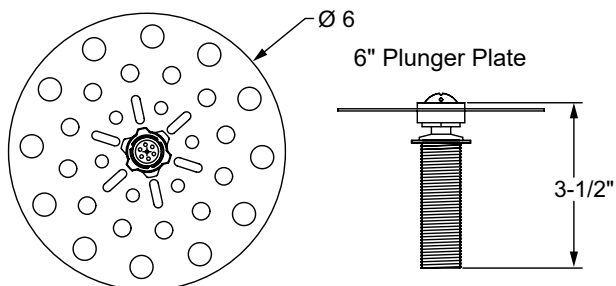

Glastender, Inc. • 5400 N Michigan Rd • Saginaw, MI • 48604-9780
 989.752.4275 • 800.748.0423 • Fax 989.752.4444
www.glastender.com

Specifications subject to change without notice. For current specifications please visit our website.

Approval/Notes: