

# AWR Series Economic Reach-ins

SOLID DOOR REFRIGERATOR  
SOLID DOOR FREEZER



Asber AWR series reach-in's are designed for the price conscious customer without sacrificing its strength and durability. At 23 cubic foot (nominal), 19.1 cu. ft. (actual), it is the most effective way to maximize your storage needs.

**All Stainless-steel front** with resistant gray side panels and galvanized back. Interior walls with NSF approved white coated steel finish, easy to clean with a sturdy stainless-steel floor. Always one step above to ensure the highest standard in safety and sanitation for your establishment.

Insulation in any Refrigerator and Freezer unit is one of the most important factors for thermal efficiency. Asber only uses the **world's leading brand "Ecomate" (GWP) (ODP) insulation, 2" thick** for the highest R value efficiency for your environments.

Asber Economic Reach-ins come with an ergonomically designed **full-length door handle**. In-step interior for a better seal and prevent sweating. Magnetic one-piece door gasket, removable without tools for ease of cleaning and replacement. **Stainless Steel hinges** for a durable long-lasting door.

With innovative and eco-friendly technology, Asber utilizes **R-290 Hydrocarbon** designed to meet DOE's Energy Conservation standards with very low contribution to global warming (ODP-0) (GWP-3).

Additional features to include:

- Door lock with universal key.
- Hermetic compressors with epoxy coated evaporator.
- **Accepts 18" x 26" sheet pans.**
- Field reversible door.
- Automatic evaporator: Paper fins not utilized in the evaporation process.
- Electronic controller with digital display.
- Refrigerator temperature: 32 °F to 38 °F based on an external environment of 90 °F and 65% RH.
- Freezer temperature: -4 °F to -8 °F based on an external environment of 90 °F and 65% RH.
- Standard with 2.5" castors, front with brakes.
- Meets the NSF-7 standard for food safety.



AWRR-23-HC / AWRF-23-HC

## OPTIONS & ACCESORIES

Additional 2nd year warranty.  
Voltage: 220V. - 1 - 50Hz.  
Additional epoxy coated shelves.  
6" adjustable stainless-steel legs.



MODEL	DOORS	SHELVES	CAPACITY (Cu. Ft.)	AMPS	HP	VOLTS	Width	DIMENSIONS Depth	Height	SHIPPING WEIGHT (lbs)
REFRIGERATOR										
AWRR-23-HC	1	3	19.1	2.5	1/4	115/60	30 1/2"	28 3/8"	77 5/8"	293
FREEZER										
AWRF-23-HC	1	3	19.1	5.0	1/2	115/60	30 1/2"	28 3/8"	77 5/8"	298


1. Height includes 2.5" diameter castors. 2. Specifications are subject to change without prior notice.

# AWR Series Economic Reach-ins


SOLID DOOR REFRIGERATOR  
SOLID DOOR FREEZER




COMMON FRONT VIEW

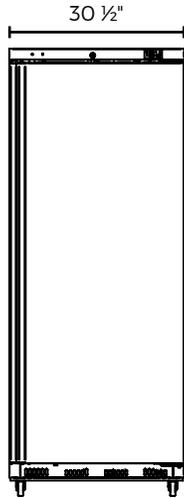

COMMON SIDE VIEW

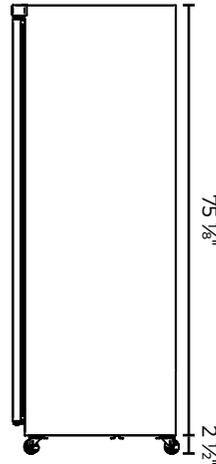

COMMON TOP VIEW



AWRR-23-HC / AWRF-23-HC

ELECTRICAL DATA	Refrigerator	Freezer
Voltage	115/60	
Plug Type	Nema 5-15P	
Full Amp. Loads	2.5	5.0
Compressor HP	1/4	1/2
Cord Length (ft)	10	10
Refrigerant	R-290	
DIMENSIONAL DATA		
# of Doors	1	
Capacity (cu. ft.)	19.1	
Ext. Width Overall	30 1/2"	
Ext. Depth Overall <sup>2</sup>	28 3/8"	
Ext. Height Overall	77 5/8"	
Int. Width Overall	26 3/8"	
Int. Depth Overall	23 1/8"	
Int. Height Overall	66 5/8"	
# of Shelves - Std.	3	
Shelf Size (L x D)	3 plus (1) bottom shelf: (3) 25 3/4" x 18 3/4" (1) 25 3/4" x 10 7/8"	
Shipping Weight (lbs.)	293	298

## Standard Features

- Stainless steel exterior front.
- 2" Ecomate CFC Free foam in place insulation.
- Accepts full size 18" x 26" sheet pans.
- Electronic controller with digital display.
- Self-contained Refrigeration with epoxy coated evaporator.
- Field reversible doors on solid single door units.
- One-piece magnetic door gasket, removable without tools.
- Door lock with universal key.
- In step door design and full-length handle.

## Options & Accesories Warranty

- Additional 2<sup>nd</sup> year warranty.
- Voltage: 220V. - I - 50Hz.
- Additional epoxy coated shelves.
- 6" adjustable stainless-steel legs.

- 1-year parts & labor.
- 5-year compressor.

\*RESIDENTIAL APPLICATIONS: Asber assumes no liability for parts or labor coverage for component failure, factory defect or any other damages for units installed in non-commercial foodservice or residential applications.

1. Height does not include 4" diameter castors (5" overall) or 6" legs.  
2. Depth includes door handle.