



METRO 2 - 54 5/16"H

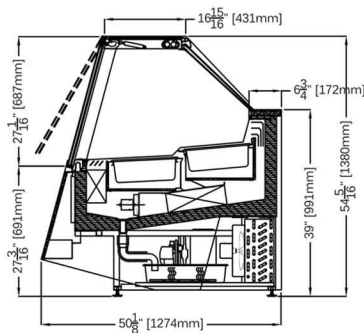

METRO 3 - 61 3/16"H

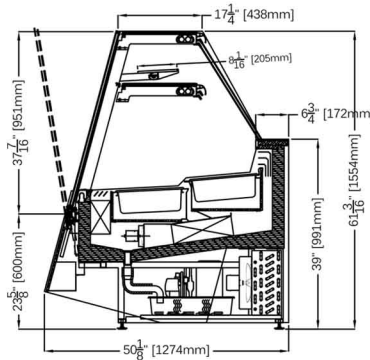


STANDARD FEATURES

Double LED lighting system
Front, top, and side double glasses
Double air flow refrigeration system
Reverse cycle defrost system
Semi-hermetic compressor
Cases ship standard unfinished

OPTIONS

S/s display tray for cakes
Dual temperature switch (-18°C/+5°C) (-0.4°F/+41°F)
Stainless steel or acrylic pans
Round tubs
Night curtain self rolling
Remote condensing unit
Dipper well
Cone holder
Casters
Available heights: 54"H, 61"H with one shelf
Popsicle display tray (stainless steel & plastic. Plastic available in color options (see images on the right))

Round Tubs Layouts (optional):

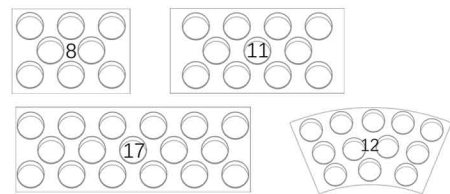


METRO GELATO						
TECHNICAL FEATURES		MODELS				
		METRO 2 G1150	METRO 2 G1650	METRO 2 G2150	METRO 2 G2150 Dual Temp	METRO 2 GA45
External Dimensions (L-D-H)	Inches	45 1/4" - 50 1/8" - 54 5/16"	64 15/16" - 50 1/8" - 54 5/16"	84 5/8" - 50 1/8" - 54 5/16"	84 5/8" - 50 1/8" - 54 5/16"	80 1/4" - 50 1/8" - 54 5/16"
	MM	1150 - 1274 - 1380	1650 - 1274 - 1380	2150 - 1274 - 1380	2150 - 1274 - 1380	2038 - 1274 - 1380
Crated Dimensions (L-D-H)	Inches	51 1/4" - 55 1/4" - 60"	70" - 55 1/4" - 60"	90" - 55 1/4" - 60"	90" - 55 1/4" - 60"	86" - 55 1/4" - 60"
	MM	1301 - 1403 - 1524	1778 - 1403 - 1524	2286 - 1403 - 1524	2286 - 1403 - 1524	2184 - 1403 - 1524
5 Liter Pan Capacity* 14 3/16" x 6 1/2" x 4 3/4" (360mm x 165mm x 120mm)	Pan Configuration	12	18	24	24 (12 + 12)	13
8 Liter Pan Capacity* 14 3/16" x 9 13/16" x 4 3/4" (360mm x 250mm x 120mm)	Pan Configuration	8	12	16	16 (8 + 8)	9
Refrigeration	Type	Fan Ventilated	Fan Ventilated	Fan Ventilated	Fan Ventilated	Fan Ventilated
Refrigeration Display Area	Type	Deck	Deck	Deck	Deck	Deck
Operating Temperature	°C / °F	-18°C / -0.4°F	-18°C / -0.4°F	-18°C / -0.4°F	(2) -18°C / -0.4°F	-18°C / -0.4°F
Compressor	Nr./Type	1 / Semi-Hermetic	1 / Semi-Hermetic	1 / Semi-Hermetic	2 / Semi-Hermetic	1 Hermetic
BTU'S @ -25°F Evap Temperature	BTU'S	2450 BTU'S 400/3/50 (EU)	3580 BTU'S 400/3/50 (EU)	4550 BTU'S 400/3/50 (EU)	11,200 BTU'S 400/3/50 (EU)	2850 BTU'S 400/3/50 (EU)
Electric Supply	(V/Ph/Hz)	208-220/3/60Hz (USA)	208-220/3/60Hz (USA)	208-220/3/60Hz (USA)	208-220/3/60Hz (USA)	208-220/1/60Hz (USA)
Power Consumption	(W/A)	1860W / 4.3A	2850W / 7A	3400W / 7.8A	3660W / 7.6A	2660W / 5.6A
Defrost	Mode/Type	Reverse Cycle	Reverse Cycle	Reverse Cycle	Reverse Cycle	Reverse Cycle
Climatic Class	N°/°C/°F/H.R.	4+/35/95/70%	4+/35/95/70%	4+/35/95/70%	4+/35/95/70%	4+/35/95/70%
Refrigerant Gas	Type	R404A	R404A	R404A	R404A	R404A
Net Weights	Kg/Lb	290Kgs / 639Lbs	360Kgs / 793Lbs	460Kgs / 1014Lbs	460Kgs / 1014Lbs	360Kgs / 793Lbs
Crated Weights	Kg/Lb	415Kgs / 914Lbs	535Kgs / 1179Lbs	680Kgs / 1499Lbs	680Kgs / 1499Lbs	360Kgs / 793Lbs

* Dimensions are without side panels & with Metro 2 information

* Pans not Included

**45° Open
(5 Liter)**



**45° Open
(8.5 Liter)**

