



F18SCV

F18SCV

31.5" (80cm) Deep Self-Contained Refrigerated Salad Top Tables

Project _____
 Item _____
 Quantity _____
 CSI Section 11400
 Approved _____
 Date _____

Models

- | | |
|------------------------------------------------|-------------------------------------------------|
| • F18SC39AV 39" length, six 1/6 pan capacity | • F18SC52DV 52" length, twelve 1/6 pan capacity |
| • F18SC39BV 39" length, eight 1/6 pan capacity | • F18SC60AV 60" length, six 1/6 pan capacity |
| • F18SC52AV 52" length, six 1/6 pan capacity | • F18SC60BV 60" length, eight 1/6 pan capacity |
| • F18SC52BV 52" length, eight 1/6 pan capacity | • F18SC60CV 60" length, ten 1/6 pan capacity |
| • F18SC52CV 52" length, ten 1/6 pan capacity | • F18SC60DV 60" length, twelve 1/6 pan capacity |



F18SC60AV

Standard Features

- 16-gauge stainless steel top construction
- Unfinished ends,
- Interior sub-top is made of ABS plastic
- 2BF stainless steel refrigerated base interior back and bottom
- High density environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane foam insulation throughout unit
- Refrigerated base fronts are made of .095" thick ABS plastic backed by rigid polyurethane water blown injection molded frames. (NO WOOD)
- Exterior drawer fronts are stainless steel with ABS plastic liner
- Snap-in dart style vinyl magnetic gasket
- Recessed black plastic handles held in with a positive lock system
- 14-gauge leg rails that run the entire length
- 6.12" adjustable stainless steel legs and bullet feet
- 8' cord and plug on self
- Environmentally friendly HFC-404A refrigerant
- Cold pan to have 2BF stainless steel interior with pans recessed 2.00"
- Cold pan is sized for two 1/6-size pans deep. Pans and adapter bars by others
- Cold pan has a on/off switch and maintains

- NSF7 temperatures utilizing a pressure control
- Interior base cabinet is cooled with mullion style evaporator blower coils (coated) mounted between each door/drawer section for very even air and temperature control
- Refrigerator interior maintains 36° to 40° at 100° ambient room temperature
- One year parts and 90 day labor standard warranty

Options & Accessories

- Available with LiquiTec cooling pan
- Remote refrigeration (contact factory) Stainless steel end or back
- Laminate facing (full front)
- Laminate end or back
- Polyethylene or composite cutting board
- Tray rack
- Drawers in lieu of one door, 19", 27" or 32"
- Locks
- Cold pan drain
- 220V/50 cycle*
- Fixed or adjustable height casters
- Celsius readout for electronic control
- Fan assist package for rail
- Temp control viewing lens on mechanical housing

*Inclusion of this option will alter the electrical specifications

Specifications

Exterior Top: Constructed of one-piece 16-gauge stainless steel, with integral 2.12" (5.4cm) square nosing at the front, and 4.00" (10.2cm) high by 2" (5.1cm) deep backsplash at the rear. Top has an opening for use with 1/6 size pans. Pans and adapter bars supplied by others. Pans are recessed 2" (5cm) and rest on pan supports. Pan opening has a 20-gauge stainless steel removable cover. Temperature in top opening to maintain 33°F (1°C) to 41°F (5°C), with pans recessed 2" (5cm), at 86°F ambient room temperature, meeting NSF7 requirements.

Unit has a stainless steel plate shelf 8.4" [21.3cm] above the doors.

Exterior back and bottom to be 24-gauge galvanized steel. Exterior ends are 18-gauge galvanized steel.

Base interior has a 22-gauge stainless steel back and bottom. Interior ends and door frames are thermoformed ABS plastic. Base is insulated with 1.5" (3.8cm) of high-density foamed-in-place polyurethane.

Door(s) have a 22-gauge stainless steel exterior front,

with a thermoformed ABS plastic interior liner. Door(s) have a black recessed handle and a snap-in magnetic gasket which is easily replaceable.

Base has a machine compartment, standard on the right, with condensing unit, condensate evaporator and an electrical junction box installed. Machine compartment has a louver for access to condensing unit. Blower coil(s) are located behind the door mullions and refrigerate the cabinet. HFC-404A refrigerant and maintains 36°F (2°C) to 40°F (4°C) interior cabinet temperature in the base.


Legs: Unit is mounted on 6.13" (15.6cm) high adjustable stainless steel legs.

Electronic control for base reads air temperature. Electronic control for rail displays temperature for set point purposes only. Display does not reflect air or product temps in unit. On/Off switches for rail and base are located behind the louvered panel.


Electrical Connections: 115 volts, 60 Hertz, single phase. Unit has an 8' (2.4m) long cord and plug.



F18SCV




F18SC52AV

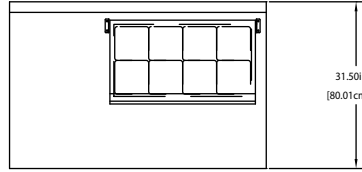


31.50in
(80.01cm)



F18SC52BV





F18SC52CV




F18SC52DV

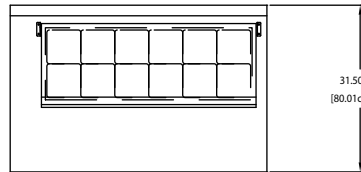


31.50in
(80.01cm)




F18SCV




F18SC60AV




F18SC60BV




F18SC60CV








F18SC60DV




F18SC39AV

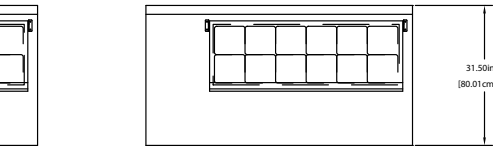


F18SC39BV

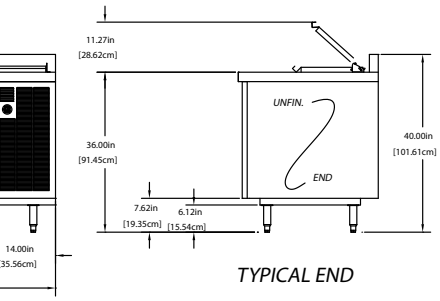


Mechanical Data




SELF CONTAINED




REMOTE



Door Swing

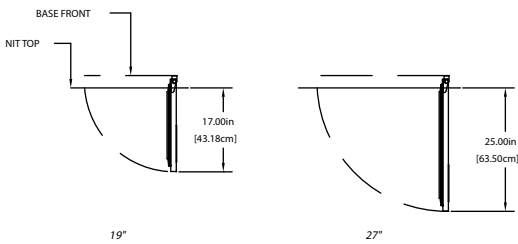

Remote Appearance



F18SCV

Model	Number of Doors	1/6 Size Pans	Volume	BTU Load @ 86F Base/Rail	BTU Sys. Cap 86F Base/Rail	H.P.	V/Hz/Ph	Amps	Nema Plug	Ship Weight	KWH
F18SC39AV	(1)19"	6	4.11	241/152	2149/793	1/4	115/60/1	7	5-15P	400lbs/181kg	0.83
F18SC39BV	(1)19"	8	4.11	241/203	2149/914	1/4	115/50/1	7	5-15P	390lbs/177kg	0.83
F18SC52AV	(2)19"	6	6.94	309/152	2149/793	1/4	115/60/1	7	5-15P	460lbs/208kg	1
F18SC52BV	(2)19"	8	6.94	309/203	2149/914	1/4	115/60/1	7	5-15P	450lbs/204kg	1
F18SC52CV	(2)19"	10	6.94	309/253	2149/1023	1/4	115/60/1	7	5-15P	440lbs/199kg	1
F18SC52DV	(2)19"	12	6.94	309/304	2149/1123	1/4	115/60/1	7	5-15P	480lbs/195kg	1
F18SC60AV	(1)19" & (1)27"	6	8.69	241/152	2149/793	1/4	115/60/1	7	5-15P	500lbs/227kg	1.11
F18SC60BV	(1)19" & (1)27"	8	8.69	241/203	2149/914	1/4	115/60/1	7	5-15P	490lbs/222kg	1.11
F18SC50CV	(1)19" & (1)27"	10	8.69	241/253	2149/1023	1/4	115/60/1	7	5-15P	480lbs/217kg	1.11
F18SC60DV	(1)19" & (1)27"	12	8.69	241/304	2149/1123	1/4	115/60/1	7	5-15P	470lbs/213kg	1.11

Model	Number of Doors	1/6 Size Pans	Volume	BTU Load @ 86F Base/Rail	Evap Caop. BTU Base 15° TD/Rail 25° TD	V/Hz/Ph	Amps	Nema Plug	Ship Weight
18SR31AV	(1)19"	6	4.11	241/152	1350/793	115/60/1	3	5-15P	340lbs/154kg
18SR44AV	(2)19"	6	6.94	309/152	1350/793	115/60/1	3	5-15P	380lbs/172kg
18SR44BV	(2)19"	8	6.94	309/203	1350/904	115/60/1	3	5-15P	370lbs/168kg
18SR44CV	(2)19"	10	6.94	309/253	1350/1023	115/60/1	3	5-15P	360lbs/163kg
18SR52AV	(1)19" & (1)27"	6	8.69	241/152	1350/793	115/60/1	3	5-15P	430lbs/195kg
18SR52BV	(1)19" & (1)27"	8	8.69	241/203	1350/904	115/60/1	3	5-15P	420lbs/190kg
18SR52CV	(1)19" & (1)27"	10	8.69	241/253	1350/1023	115/60/1	3	5-15P	410lbs/186kg
18SR52DV	(1)19" & (1)27"	12	8.69	241/304	1350/1123	115/60/1	3	5-15P	400lbs/181kg

Welbilt reserves the right to make changes to the design or specifications without prior notice.

980 S. Isabella Rd.
Mt. Pleasant, Michigan 48858

Phone: 800-733-8948 or 989-773-7981
Fax: 800-669-0619
www.delfield.com

Printed in the U.S.A.
5920A_DEL_F18SCV
03/17

