



Item: _____
 Quantity: _____
 Project: _____

60" Electric Restaurant Range

Royal Series

Models: ☐ RRE-10 ☐ RRE-8GT12 ☐ RRE-6GT24 ☐ RRE-4GT36
☐ RRE-2GT48 ☐ RRE-GT60



RRE-6GT24 Shown with optional casters

Voltage: ☐ 208V ☐ 240V
 Phase: ☐ 1 Phase ☐ 3 Phase

Options and Accessories

- ☐ 6" high S/S stub back in lieu of high shelf
- ☐ 1" thick griddle plate
- ☐ Griddle on right (Left hand side standard)
- ☐ Chrome griddle plate
- ☐ Grooved griddle (specify width: _____")
- ☐ 9" deep S/S front landing ledge, with or without sauce pan cutouts
- ☐ One Convection Oven and one Standard Oven
 Convection oven: ☐ Left ☐ Right add suffix "-C"
- ☐ Two 26½" Convection Ovens - add suffix "-CC"
- ☐ One 26½" Convection Oven - add suffix "-126C"
 Cabinet space: ☐ Left ☐ Right
- ☐ Additional oven racks
- ☐ Open storage cabinet base - add suffix "-XB"
- ☐ Cabinet doors
- ☐ Intermediate shelf
- ☐ 5" swivel casters (set of four - 2 locking)


Standard Features

- Stainless steel front, sides, control panel and kick plate including backguard and high shelf
- Stainless steel full width drip tray
- Oven - total 5 KW with low wattage "broiler" element
- Oven thermostat controls, 200°-500°F
- Five position heavy gauge chrome rack guides
- One chrome rack per oven
- Five surface porcelain oven interior
- 9" solid hot plate elements, 2KW each
- 3/4 thick polished steel griddle plate
- Standard with thermostat every 12"



2 YEAR LIMITED, PARTS AND LABOR WARRANTY

60" Electric Restaurant Range

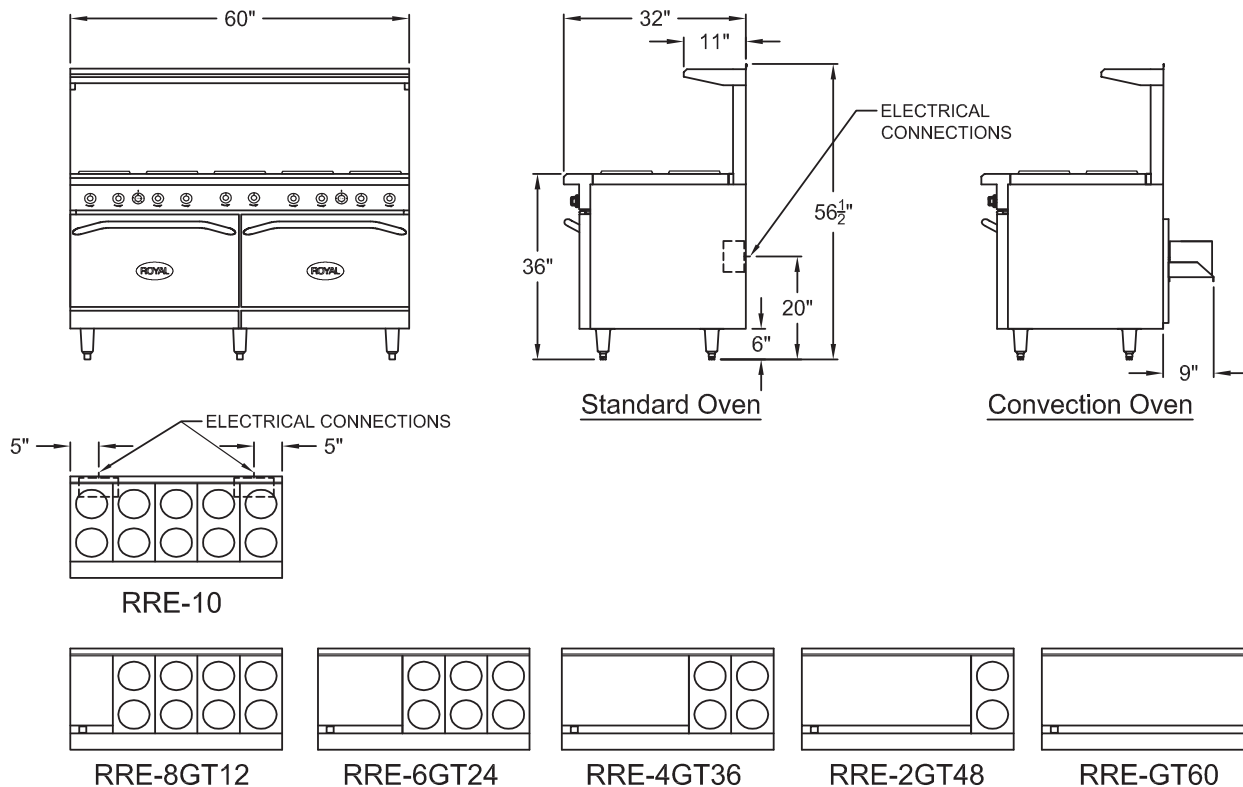

Model	Total KW	Voltage	A M P S					
			1 Phase		3 Phase			
			L1	L3	L1	L2	L3	Ship Wt.
RRE-10	30	208	145	145	92	94	94	1005
		240	125	125	75	78	75	
RRE-8GT12	29.4	208	142	142	92	90	88	1035
		240	123	123	75	74	73	
RRE-6GT24	28.8	208	139	139	88	86	88	1085
		240	120	120	73	72	73	
RRE-4GT36	28.2	208	136	136	94	92	90	1110
		240	118	118	78	75	74	
RRE-2GT48	27.6	208	133	133	90	88	90	1120
		240	115	115	74	73	74	
RRE-GT60	27	208	130	130	80	85	97	1160
		240	113	113	70	71	84	

60" Electric Range units have two electrical connections

To be installed only in noncombustible surroundings. See installation instructions.

For convection ovens: add 4 amps plus 75# shipping weight per convection oven

Due to continuing product development to ensure best possible performance, these specifications are subject to change without prior notification.

Royal Range of California, Inc.

3245 Corridor Dr. • Eastvale, CA 91752 • (800) 769-2414 • (951) 360-1600

Fax: (951) 360-7500 • www.royalranges.com • sales@royalranges.com