



SINMAG
Company

LBC Kitchen Series Electric Rotisserie

Item No. _____
Project _____
Quantity _____

Models: LCR5 & LCR7



	LCR5	LCR7
Angle Spits (sold separately)	5	7
Fork Spits (sold separately)	5	7
Baskets (sold separately)	5	7
Chicken Capacity / Oven	15 - 20	28 - 35

Short Bid Specification

Rotisserie shall be an LBC model LCR_ (insert 5 or 7) electrically heated rotary oven with a digital control capable of storing up to 20 recipes. Control shall have 6 quick set buttons for most popular recipes and large LED displays for time, temperature and recipe number. Control shall have a 3-event cooking capability for sear, roast and hold. Control shall have a jog feature to manually rotate the carousel. Oven doors shall have tempered full view glass with a hinged inner pane for easy cleaning. Complete rotisserie shall also include all features listed and options checked.

Standard Product Warranty

1 Year Parts and Labor (Contiguous US, Alaska, Hawaii & Canada)

Construction Features

- Stainless steel interior and exterior
- LCR5: 208/240VAC, single phase only
- LCR7: 208/240VAC, single or three phase
- LCR7 stackable with other LCR7 or LHC7 Holding Cabinet
- Full view double pane loading door(s)
- Low-energy reflective coating on door windows
- Hinged inner pane for easy cleaning
- Bright interior lighting
- Easily removable spits, forks and baskets (sold separately)
- Removable stainless steel drip pan with drain valve

Performance Features

- Fast acting heater elements
- Top mounted fans to thoroughly circulate convection air
- Even browning on all sides of cooked product
- Chicken Capacity: 15-20 (LCR5) and 28-35 (LCR7)

Control Features

- Temperature Range: 145-480 deg F [63-250 deg C]
- Simple and intuitive layout
- Large displays for time, temperature and recipe number
- 3-event cooking capability with storage capacity for 20 recipes
- 6 quick select buttons for most frequently used recipes
- Jog button to start/stop carousel for loading and unloading
- Buzzer alarm to indicate end of cook cycle
- Temperature displays in deg F or deg C
- 99 hour 59 minute timer

Options and Accessories

- Loading door frontside only or doors front and back
- Customer-side loading door handle
- 4" [102mm] countertop legs, 6" [152mm] floor legs or low-profile swivel casters
- Stainless steel or non-stick carousel, angle spits, fork spits and baskets
- Hand-held temperature probe with probe hanger bracket
- Stand with casters
- LHC7 Holding Cabinet (for LCR7 only)
- Chain restraint kit



Meets UL 197 and NSF 4 Standards

Sheet Number LCR-001 (Rev K - 1/12)

LBC Kitchen Series Electric Rotisserie



Models: LCR5 & LCR7

INSTALLATION REQUIREMENT

Each unit ships separately. Stacking or placing on legs, casters or stand is required.

OPTIONS & ACCESSORIES (Check as Required)

- | | | |
|---|--|---|
| <input type="checkbox"/> Front Door only | <input type="checkbox"/> Stainless Carousel | <input type="checkbox"/> Stainless Baskets |
| <input type="checkbox"/> Front & Rear Doors | <input type="checkbox"/> Non-stick Carousel | <input type="checkbox"/> Non-Stick Baskets |
| <input type="checkbox"/> Rear Door Handle | <input type="checkbox"/> Stainless Angle Spits | <input type="checkbox"/> Hand-Held Temperature Probe w/Hanger Bracket |
| <input type="checkbox"/> 4" [102mm] Legs | <input type="checkbox"/> Non-Stick Angle Spits | <input type="checkbox"/> LST5 Stand with Casters (for LCR5 only) |
| <input type="checkbox"/> 6" [152mm] Legs | <input type="checkbox"/> Stainless Fork Spits | <input type="checkbox"/> LST7 Stand with Casters (for LCR7 only) |
| <input type="checkbox"/> Swivel Casters | <input type="checkbox"/> Non-Stick Fork Spits | <input type="checkbox"/> LHC7 Holding Cabinet (for LCR7 only) |
| | | <input type="checkbox"/> Chain Restraint Kit |

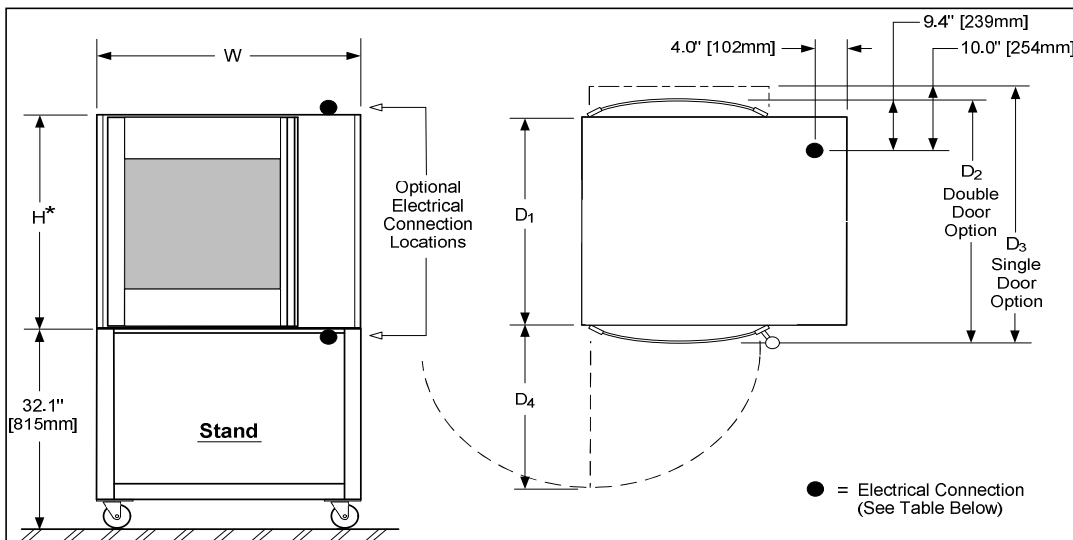

* Appliance height does not include legs, casters or stand. Add 4.0" [102mm] for countertop legs, 6.0" [152mm] for floor legs or 4.5" [114mm] for casters. Add 32.1" [815mm] for stand with casters.

Model	H*	W	D ₁	D ₂	D ₃	D ₄	Actual Weight	Shipping Weight	Freight Class
LCR5	32.5" [826mm]	31.5" [800mm]	21.7" [551mm]	26.3" [668mm]	27.1" [688mm]	24.3" [617mm]	320 lbs [145kg]	450 lbs [204kg]	85
LCR7	38.4" [975mm]	38.9" [988mm]	26.5" [673mm]	32.6" [828mm]	32.6" [828mm]	31.6" [803mm]	460 lbs [209kg]	610 lbs [277kg]	85
LHC7 (Reference)	38.4" [975mm]	38.9" [988mm]	26.5" [673mm]	32.6" [828mm]	32.6" [828mm]	31.6" [803mm]	430 lbs [195kg]	580 lbs [263kg]	85

Model	Voltage	kW	Min Circuit Ampacity		Max Breaker Size	
			1 Phase	3 Phase	1 Phase	3 Phase
LCR5	208 VAC	4.0	40	N/A	60	N/A
	240 VAC	4.0	35	N/A	60	N/A
LCR7	208 VAC	8.0	55	N/A	60	N/A
	240 VAC	8.0	50	N/A	60	N/A
	208 VAC	9.0	N/A	40	N/A	60
	240 VAC	9.0	N/A	35	N/A	60
LHC7 (Reference)	208 VAC	2.0	20	N/A	60	N/A
	240 VAC	2.0	20	N/A	60	N/A

Installation, Start-up and Training are Not Included