

RC SERIES FRONT & BACK COUNTERS

REFRIGERATED COUNTERS

ALL METAL CONSTRUCTION

SOLID DOORS & DRAWERS



GLASS DOORS & DRAWERS



STANDARD FEATURES

ETL approval for UL safety and NSF sanitation
Patented access system for electrical plumbing and refrigeration
Stainless steel adjustable feet
Aisi 304 stainless steel module with BA external finish and 2B internal stainless steel
Round corners inside the model
Ecological CFC free polyurethane foam
Stainless steel intermediate and adjustable shelf
High capacity evaporator with fan system
Digital Dixell control with safe housing
Stainless steel counter bar
Stainless steel doors
Ventilated refrigerated
Self contained
Steel frame

OPTIONS

Stainless steel sliding drawers
Glass doors
Glass sliding drawers
Stone top
Casters
Work top options:

-  Flat
-  Back splash 8"H (199mm)
-  Pre-arrangement for service top
-  Round per "Compact Round"

REFRIGERATED COUNTERS SPECIFICATIONS

CODES	MODELS	LENGTHS	DEPTHS	HEIGHT	# OF DOORS	WEIGHTS (LBS)	VOLTAGES	AMPS
BRPVFP58H75	500A	20" (500mm)	25 3/4" (655mm)	44 1/2" (1130mm)	1	84	120	2
BRPVFP65H75	500B	20" (500mm)	29 1/2" (750mm)	44 1/2" (1130mm)	1	88	120	2
BRPVFP2P58H75	1000A	40" (1000mm)	25 3/4" (655mm)	44 1/2" (1130mm)	2	156	120	6
BRPVFP2P65H75	1000B	40" (1000mm)	29 1/2" (750mm)	44 1/2" (1130mm)	2	201	120	6
BRPVFP5P58H75	1000TA	40" (1000mm)	25 3/4" (655mm)	44 1/2" (1130mm)	1	220	120	7
BRPVFP6P58H75	1000TB	40" (1000mm)	29 1/2" (750mm)	44 1/2" (1130mm)	1	230	120	7
BRPVFP3P58H75	1500A	60" (1500mm)	25 3/4" (655mm)	44 1/2" (1130mm)	3	242	120	4
BRPVFP3P65H75	1500B	60" (1500mm)	29 1/2" (750mm)	44 1/2" (1130mm)	3	251	120	4
BRPVFP2P58H75	1500TA	60" (1500mm)	25 3/4" (655mm)	44 1/2" (1130mm)	2	240	120	8
BRPVFP2P65H75	1500TB	60" (1500mm)	29 1/2" (750mm)	44 1/2" (1130mm)	2	251	120	8
BRPVFP4P58H75	2000A	80" (2000mm)	25 3/4" (655mm)	44 1/2" (1130mm)	4	306	120	5
BRPVFP4P65H75	2000B	80" (2000mm)	29 1/2" (750mm)	44 1/2" (1130mm)	4	317	120	5
BRPVFP3P58H75	2000TA	80" (2000mm)	25 3/4" (655mm)	44 1/2" (1130mm)	3	316	120	8
BRPVFP3P65H75	2000TB	80" (2000mm)	29 1/2" (750mm)	44 1/2" (1130mm)	3	330	120	8
BRPVFP5P58H75	2500A	98" (2500mm)	25 3/4" (655mm)	44 1/2" (1130mm)	5	383	120	7
BRPVFP5P65H75	2500B	98" (2500mm)	29 1/2" (750mm)	44 1/2" (1130mm)	5	418	120	7
BRPVFP4P58H75	2500TA	98" (2500mm)	25 3/4" (655mm)	44 1/2" (1130mm)	4	380	120	9
BRPVFP4P65H75	2500TB	98" (2500mm)	29 1/2" (750mm)	44 1/2" (1130mm)	4	394	120	9
BRPVFP6P58H75	3000A	118" (3000mm)	25 3/4" (655mm)	44 1/2" (1130mm)	6	380	120	7
BRPVFP6P65H75	3000B	118" (3000mm)	29 1/2" (750mm)	44 1/2" (1130mm)	6	395	120	7
BRPVFP5P58H75	3000TA	118" (3000mm)	25 3/4" (655mm)	44 1/2" (1130mm)	5	308	120	10
BRPVFP5P65H75	3000TB	118" (3000mm)	29 1/2" (750mm)	44 1/2" (1130mm)	5	318	120	10

T= Self Contain | Without T= Remote

A= 25 3/4" (655mm) | B= 29 1/2" (750mm)



1441 Rollins Roads, Burlingame, CA 94010
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
sales@oscartek.com | www.oscartek.com




RC SERIES FRONT & BACK COUNTERS


REFRIGERATED COUNTERS

OPTIONAL BACK SPLASH 8" H (199mm) SHOWN

A - 25 3/4" D (655mm)
SIDE VIEW



B - 29 1/2" D (750mm)
SIDE VIEW

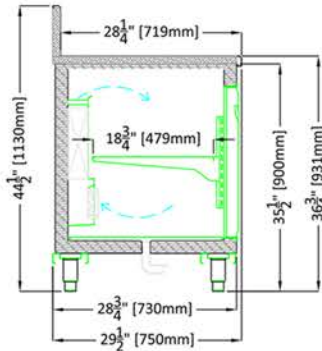

500



1000T



1000



1500T



1500



2000T



2000



2500T



2500



3000T



3000



T = Self Contain | Without T = Remote

PLAN VIEWS

A - 25 3/4" D (655mm)

500



1000T



1000




1500T




1500





2000T




2000




B - 29 1/2" D (750mm)




2500T




2500







3000T



3000



A - 25 3/4" D (655mm)




B - 29 1/2" D (750mm)




T = Self Contain | Without T = Remote

REAR ELEVATIONS (OPERATOR SIDE)


500




1000T




1000




1500T




1500




2000T




2000




2500T




2500



3000T



3000



T = Self Contain | Without T = Remote



1441 Rollins Roads, Burlingame, CA 94010
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
sales@oscartek.com | www.oscartek.com

