DISPLAY FREEZER (0°F)

Model: 1FXSNGDHD

Natural Refrigerant R-290 Model

1-Section Extra-Wide Display Reach-In Freezer with Half Hinged Glass Doors - Shallow Depth

1FXSNGDHD - Stainless steel front, aluminum end panels and interior

1FXSNSAGDHD - Stainless steel exterior, aluminum interior

1FXSNSSGDHD - Stainless steel exterior and interior



Options and Accessories

(upcharge and lead times may apply)

3 11 37
Full door
Adjustable legs
Solid door (consult factory)
Special electrical req. (consult factory)
Standard depth (consult factory)

Consult factory for other model configurations, options and accessories.

Project Name:		
Model Specified:		
Location:		
Essention:		
Item No:	Quantity:	
AIA #:	SIS #:	

Standard Model Features

REFRIGERATION SYSTEM

Self contained, performance rated refrigeration system

Natural, environmentally safe, high efficiency R-290 refrigerant¹

Automatic, electric condensate evaporator

Expansion valve system

Standard operating temperature is 0 to -5°F and can be adjusted to operate as low as -10°F in a 90°F ambient.

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation

Triple-pane, tempered hinged glass doors

Chrome plated door handles

Cam action, lift-off hinges

Self-closing doors

Magnetic snap in door gaskets

Cylinder lock in each door

Heavy duty, epoxy coated steel shelves

5" casters

MODEL FEATURES

LED interior lighting

Electronic controller with digital display & hi-low alarm

Automatic electric defrost

¹ R-290 refrigerant meets all federal and state regulatory requirements.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

Model Specifications

DIMENSIONAL DATA	
Net Capacity (cubic feet)	26 (736 cu I)
Width, Overall (inches)	36 1/4 (921 mm)
Depth, Overall (inches) (including handle)	29 ½ (743 mm)
Depth (inches) (less door)	25 % (657 mm)
Depth (inches) (door open 90°)	60 ¾ (1543 mm)
Clear Door Width (inches)	29 % (752 mm)
Clear Half Door Height (inches)	27 ½ (699 mm)
Height, Overall (inches) (including 5" casters)	82 ½ (2089 mm)
Number of Doors	2
Number of Shelves	4
Shelf Area (square feet)	24.4 (2.3 sq m)

REFRIGERANT DATA

Condensing Unit Size (H.P.)	1/2
Capacity (BTU per hour)*	2720

ELECTRICAL DATA

Voltage (International)	115/60/1 (220/50/1)
Feed Wires (including ground)	3
Total Amps (International)	9.4 (8.9)
Defrost Amps (International)	6.5 (3.3)
10 ft. Cord/Plug [attached] (International)	Yes (No)

SHIPPING DATA

Height - Crated (inches)	85 ½ (2172 mm)
Width - Crated (inches)	42 (1067 mm)
Depth - Crated (inches)	42 (1067 mm)
Volume - Crated (cubic feet)	87 (2464 cu I)
Weight Std - Crated (pounds)	455 (206 kg)
Weight SS - Crated (pounds)	465 (211 kg)

* Rating @ -15°F evaporator, 90°F ambient Figures in parentheses reflect metric equivalents rounded to the nearest

whole unit.

Equipped with one NEMA-5-15P Plug (varies by country)

Continental® Refrigerator

Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.









© Copyright 2021. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

Model Plan Views

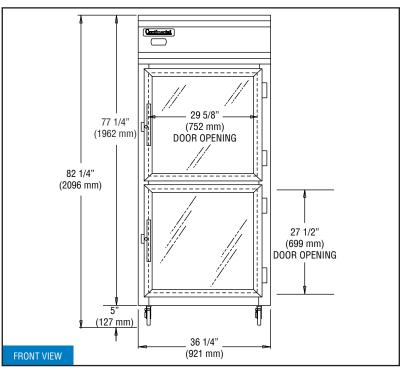

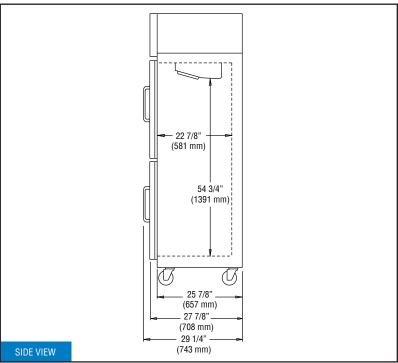

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a <u>minimum</u> clearance of 12" is required on top and 3" on sides and rear.