



Broaster[®] Perfect Hold™ Deli Case

Standard Features



- *User-friendly design* – available in countertop and stand-alone versions.
- *Unique front glass design* – pivots down for easy cleaning.
- *Rollerless sliding glass doors* – easy to clean.
- *Mechanical timers* – track holding time for each row of pans to maintain optimum holding times.
- *Rheostats* – allow full range of light control for each zone.
- *Simplified controls* – offer uniform warming of foods.
- *Euro-look design* – provides excellent visual presentation and appeal.
- *Waterless system* – eliminates plumbing requirements and expense.
- *Recessed electrical upper controls* – reduce potential damage risks.
- *Single main power switch* – allows for easy start-up and shut-down.
- *Attractive Broaster color scheme* – reinforces brand image of quality with Broaster Express[®] or Genuine Broaster Chicken[®] logo (on complete deli cases).
- *Optional built-in backlit graphics* – standard Broaster Express[®] or Genuine Broaster Chicken[®] graphics panel on complete deli cases can be backlit with optional 3-bulb fluorescent light unit.



Specifications

Model HDM-4 deli case with single shelf display area is stainless steel and tempered glass construction. Includes bottom-hinged drop-down front access glass display panel for easy loading and cleaning. Upper housing is air-cooled and includes 3 lighted 12" x 26" display zones. Each zone has recessed rheostats for full-range adjustment of display lighting and 3 individual timers to maintain optimum holding times. Model HDM-6 includes 5 display zones.


Rear access doors are of tempered glass and lightweight aluminum channel construction. There are rollerless upper and lower nylon guides for lift-out loading and cleaning.

A master power supply switch and zoned temperature control systems help maintain safe product temperature. Primary heat is provided below the food display by a recessed serpentine tubular metal sheathed element with dedicated thermostatic control. Lower heat system is water free with no plumbing required.

Additional specification for "Complete Deli Case":

Deli Case is fixed to free-standing metal module of equal width. It includes rear cutting board and front graphic insert.

Broaster® Perfect Hold™ Deli Case

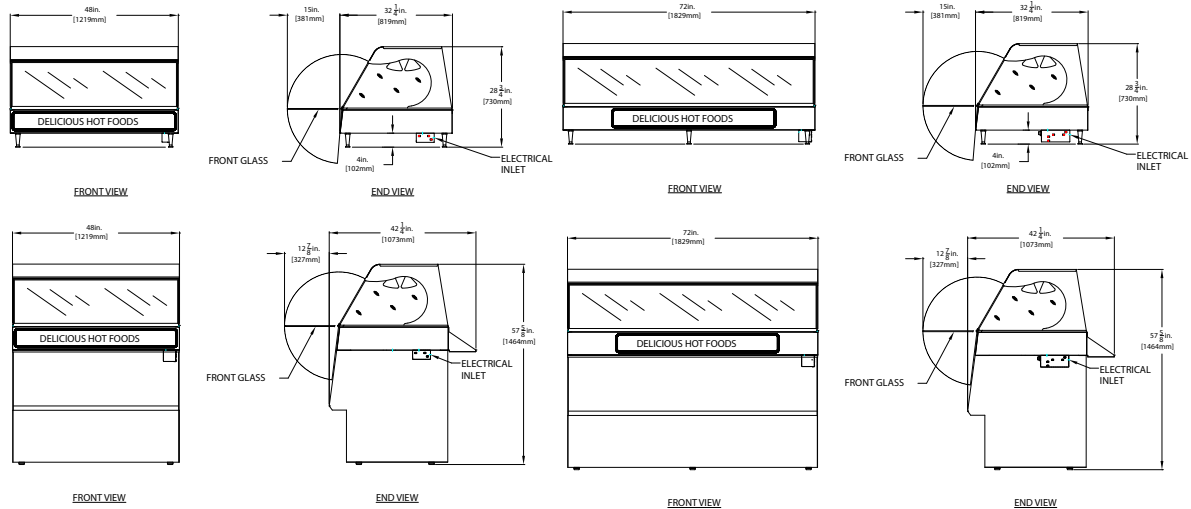

Specifications

| Model | W x D x H includes 4" (102 mm) legs | Pan Capacity | Volts | Hz | Watts | Amps | Wiring/ Phase | Net/Ship Weight lbs. (kg) |
|---|--|--|-------------|----|--------------|----------|----------------------------|------------------------------|
| HDM-4 • 4 Foot Complete Deli Case | | | | | | | | |
| 85918 85919 (backlit)* | 48" x 42-1/4" x 57-5/8" (1219 mm x 1073 mm x 1464 mm) | (3) 12" x 20" pans plus (3) 12" x 6" pans | 120/240 | 60 | 2900 2975 | 15 16 | 4-wire grounded, 1PH | 510/550 lbs. (231/250 kg) |
| 85916 85917 (backlit)* | 48" x 42-1/4" x 57-5/8" (1219 mm x 1073 mm x 1464 mm) | (3) 12" x 20" pans plus (3) 12" x 6" pans | 120/208 | 60 | 2900 2975 | 16 17 | 4-wire grounded, 1PH | 510/550 lbs. (231/250 kg) |
| HDM-6 • 6 Foot Complete Deli Case | | | | | | | | |
| 85923 85924 (backlit)* | 72" x 42-1/4" x 57-5/8" (1829 mm x 1073 mm x 1464 mm) | (5) 12" x 20" pans plus (5) 12" x 6" pans | 120/208 | 60 | 4500 4575 | 16 17 | 5-wire grounded, 3PH | 700/750 lbs. (318/340 kg) |
| 85925 85926 (backlit)* | 72" x 42-1/4" x 57-5/8" (1829 mm x 1073 mm x 1464 mm) | (5) 12" x 20" pans plus (5) 12" x 6" pans | 120/240 | 60 | 4500 4575 | 15 16 | 5-wire grounded, 3PH | 700/750 lbs. (318/340 kg) |
| 85921 85922 (backlit)* | 72" x 42-1/4" x 57-5/8" (1829 mm x 1073 mm x 1464 mm) | (5) 12" x 20" pans plus (5) 12" x 6" pans | 120/208/240 | 60 | 4500 4575 | 26 27 | 4-wire grounded, 1PH | 700/750 lbs. (318/340 kg) |
| HDM-4 • 4 Foot Counter Top Deli Case | | | | | | | | |
| 85703 | 48" x 32-1/4" x 28-3/4" (1219 mm x 819 mm x 730 mm) | (3) 12" x 20" pans plus (3) 12" x 6" pans | 120/240 | 60 | 2900 | 15 | 4-wire grounded, 1PH | 310/350 lbs. (141/159 kg) |
| 85709 | 48" x 32-1/4" x 28-3/4" (1219 mm x 819 mm x 730 mm) | (3) 12" x 20" pans plus (3) 12" x 6" pans | 120/208 | 60 | 2900 | 16 | 4-wire grounded, 1PH | 310/350 lbs. (141/159 kg) |
| HDM-6 • 6 Foot Counter Top Deli Case | | | | | | | | |
| 85754 | 72" x 32-1/4" x 28-3/4" (1829 mm x 819 mm x 730 mm) | (5) 12" x 20" pans plus (5) 12" x 6" pans | 120/208 | 60 | 4500 | 16 | 5-wire grounded, 3PH | 510/550 lbs. (231/250 kg) |
| 85756 | 72" x 32-1/4" x 28-3/4" (1829 mm x 819 mm x 730 mm) | (5) 12" x 20" pans plus (5) 12" x 6" pans | 120/240 | 60 | 4500 | 15 | 5-wire grounded, 3PH | 510/550 lbs. (231/250 kg) |
| 85758 | 72" x 32-1/4" x 28-3/4" (1829 mm x 819 mm x 730 mm) | (5) 12" x 20" pans plus (5) 12" x 6" pans | 120/208/240 | 60 | 4500 | 26 | 4-wire grounded, 1PH | 510/550 lbs. (231/250 kg) |

* includes 3-bulb fluorescent light unit (for backlighting the graphics panel on complete deli cases)

All units are supplied without power cords.

Accessories & Options Available

- Protective light guards - 3 guards for 4' and 5 guards for 6' cases
- Decorative branded insert trays
- Half and full-length middle storage shelves
- Durable black plastic or stainless steel pans in 12" x 6" x 2", 12" x 10" x 2", 12" x 20" x 2", 12" x 6" x 4", 12" x 10" x 4", and 12" x 20" x 4" sizes