

ITALIA PRO HIGH HUMIDITY COLD SHOWCASE

STANDARD FEATURES

- Maxi display refrigerated top
- Diffused LED light 3000°K
- Sliding double pane glass drawers
- Double glazed tempered front, sides, and top glass
- Electronic temperature control
- Perfect visibility on all 4 sides
- Glass frame gray
- Cases ship standard unfinished front and stainless steel skin sides

OPTIONS

- Glass frame colors: black, white, and gold
- Remote condensing unit
- RAL color finish/wood laminate front and side panels
- Heated pan for evaporator
- Casters



Photos shown with custom finish and RAL color finish. Standard cases are unfinished front with stainless steel skin sides.



Visit our website for more finishing options and RAL colors
www.oscartek.com

ITALIA PRO HIGH HUMIDITY COLD SHOWCASE				
DELI/PASTRY / CHEESE / RED MEAT / CHARCUTERIE				
TECHNICAL FEATURES		MODELS		
		ITALIA PRO 900 (ITL35PRDP)	ITALIA PRO 1200 (ITL47PRDP)	ITALIA PRO 1500 (ITL59PRDP)
External Dimensions (L-D-H)	Inches	*35 5/8" - 32 5/8" - 37 3/8"	*47 3/8" - 32 5/8" - 37 3/8"	*59 1/4" - 32 5/8" - 37 3/8"
Inches-MM	MM	*904 - 829 - 950	*1204 - 829 - 950	*1504 - 829 - 950
Crated Dimensions (L-D-H)	Inches	43 3/8" - 39 3/8" - 43"	55 1/8" - 39 3/8" - 43"	66 7/8" - 39 3/8" - 43"
Inches-MM	MM	1100 - 1000 - 1092	1400 - 1000 - 1092	1700 - 1000 - 1092
Refrigeration	Type	Ventilated	Ventilated	Ventilated
Refrigeration Display Area	Type	Deck	Deck	Deck
Operating Temperature	°F	39.2°F	39.2°F	39.2°F
Compressor	Nr./Type	1 / Hermetic	1 / Hermetic	1 / Hermetic
BTU'S @ +14°F Expansion Temperature	BTU's	1980 (Deli/Pastry/Cheese) 2200 (Meat/Charcuterie)	2660 (Deli/Pastry/Cheese) 2900 (Meat/Charcuterie)	3380 (Deli/Pastry/Cheese) 3900 (Meat/Charcuterie)
Electric Supply	V/Ph/Hz	115/1/60	115/1/60	115/1/60
Power Consumption	W/A	580/5.5 (Deli/Pastry/Cheese) 680/6.1 (Meat/Charcuterie)	650/6.2 (Deli/Pastry/Cheese) 850/7.9 (Meat/Charcuterie)	850/8.0 (Deli/Pastry/Cheese) 1100/10.2 (Meat/Charcuterie)
Defrost	Mode/Type	Automatic	Automatic	Automatic
Climatic Class	°F/H.R.	75°F-55%RH	75°F-55%RH	75°F-55%RH
Refrigerant Gas	Type	R404A / R452A	R404A / R452A	R404A / R452A
Pipe Size (Inches)	Suction, Liquid	3/8" Suction, 1/4" Liquid	3/8" Suction, 1/4" Liquid	1/2" Suction, 1/4" Liquid
Net Weights	Lb	330	400	510
Crated Weights	Lb	380	450	585

* DIMENSIONS ARE WITHOUT SIDE PANELS

*Factory in its effort to upgrade and improve our products, has the right to change, modify, discontinue or change any feature, size or capacity on any model without prior notice.




512 South Airport Blvd., South San Francisco, CA 94080
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
sales@oscartek.com | www.oscartek.com






ITALIA PRO HIGH HUMIDITY COLD SHOWCASE

SECTION VIEW: ITALIA PRO 900, 1200, 1500



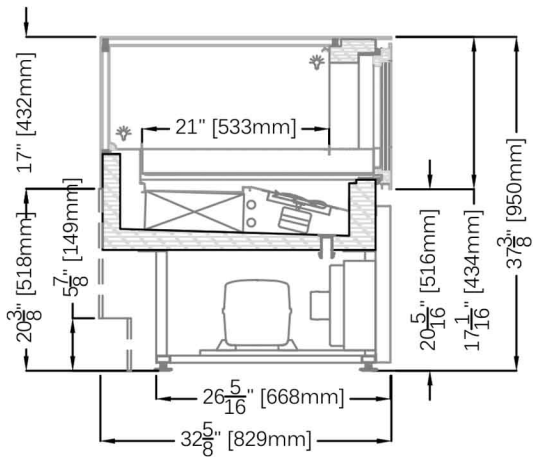


ELECTRICAL LEGEND	
	REFRIGERATED LINES
	DRAIN
	POWER

PLAN VIEWS: ITALIA PRO 900, 1200, 1500

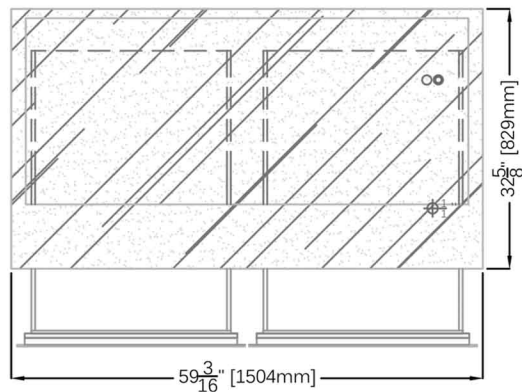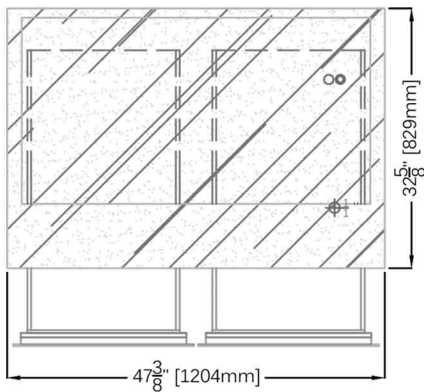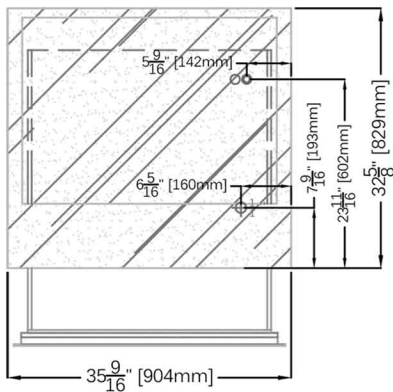

REAR ELEVATIONS (OPERATOR SIDE): ITALIA PRO 900, 1200, 1500

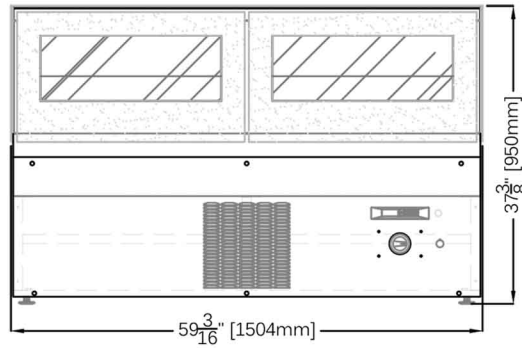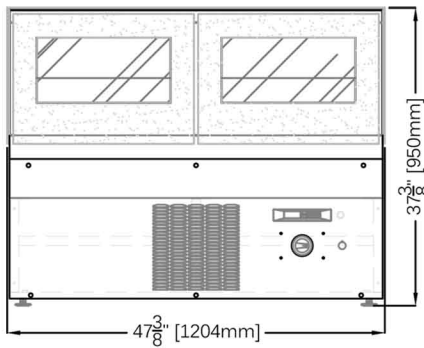

*Factory in its effort to upgrade and improve our products, has the right to change, modify, discontinue or change any feature, size or capacity on any model without prior notice.