

DESIGNER LINE ROLL-THRU FREEZER (0°F)

Model: D2FINRT
Natural Refrigerant R-290 Model

Designer Line

2-Section Roll-Thru Freezer with 66¼" Cart Capacity

D2FINRT - Stainless steel front, aluminum end panels and interior
D2FINS-RT - Stainless steel exterior, aluminum interior
D2FINSS-RT - Stainless steel exterior and interior



Options and Accessories

(upcharge and lead times may apply)

Epoxy coated steel shelves	Special electrical req. (consult factory)
Chrome or stainless steel shelves	Correctional Facility Options
Rehinging of doors (consult factory)	• One way security screws
Custom laminates	• Locking hasp (lock not included)
Half doors	• Stainless steel mesh cover
Roll-In (consult factory)	• Coverless hinges

Consult factory for other model configurations, options and accessories.

Continental
Refrigerator

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

539 Dunksferry Road
Bensalem, PA 19020
www.continentalrefrigerator.com

Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

Standard Model Features

REFRIGERATION SYSTEM

Self contained, performance rated
"plug" refrigeration system

Natural, environmentally safe,
high efficiency R-290 refrigerant¹

Refrigeration system is readily accessible on
top of cabinet, separate from the "food zone"

Automatic, hot gas condensate evaporator

Expansion valve system

Standard operating temperature is 0 to -5°F and can be adjusted to operate
as low as -10°F in a 90°F ambient.

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation

Smooth, polished chrome workflow door handles

Cam action, lift off hinges

Magnetic snap in Santoprene™ door gaskets

Cylinder lock in each door

Self-closing doors

66 ½" high door opening (66 ¼"H rack capacity*)

MODEL FEATURES

Electronic controller with digital display & hi-low alarm

LED interior lighting

Top and side air distribution ducts

Off-cycle defrost

Cabinet upper side panels and refrigeration "plug"
system can be removed and reinstalled at job site

Removable stainless steel rack guides

Removable stainless steel ramps

Reinforced stainless steel floor

* Rack not supplied

IMPORTANT NOTE: ¹ R-290 refrigerant meets all federal and state
regulatory requirements.

APPROVAL:

Model Specifications

DIMENSIONAL DATA

Net Capacity (cubic feet)	64 (1812 cu l)
Width, Overall (inches)	68 1/2 (1740 mm)
Depth, Overall (inches) (including handles)	38 3/4 (984 mm)
Depth (inches) (less doors)	32 (813 mm)
Depth (inches) (doors open 90°)	98 (2489 mm)
Clear Door Width (inches)	27 3/8 (695 mm)
Clear Full Door Height (inches)	66 1/2 (1676 mm)
Height, Overall (inches)	86 (2184 mm)
Number of Door(s)	4
Rack Capacity**	2

REFRIGERANT DATA

Condensing Unit Size (H.P.)	1 1/4
Capacity (BTU per hour)*	4150

* Rating @ -15°F evaporator, 90°F ambient

ELECTRICAL DATA

Voltage (International)	115/208-230/60/1 (220/50/1)
Feed Wires (including ground)	4
Total Amps (International)	13.8 (7.7)
Defrost Amps (International)	5.2 (2.6)
10 ft. Cord/Plug (International)	No (No)


SHIPPING DATA

Height - Crated (inches)	94 (2288 mm)
Width - Crated (inches)	77 (1956 mm)
Depth - Crated (inches)	42 (1067 mm)
Volume - Crated (cubic feet)	168 (4757 cu l)
Weight Std - Crated (pounds)	863 (391 kg)
Weight SS - Crated (pounds)	1047 (475 kg)


* Rating @ +25°F evaporator, 90°F ambient

** Maximum rack size including wheels - 27"W x 29"D x 66 1/4"H
Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.

Model Plan Views

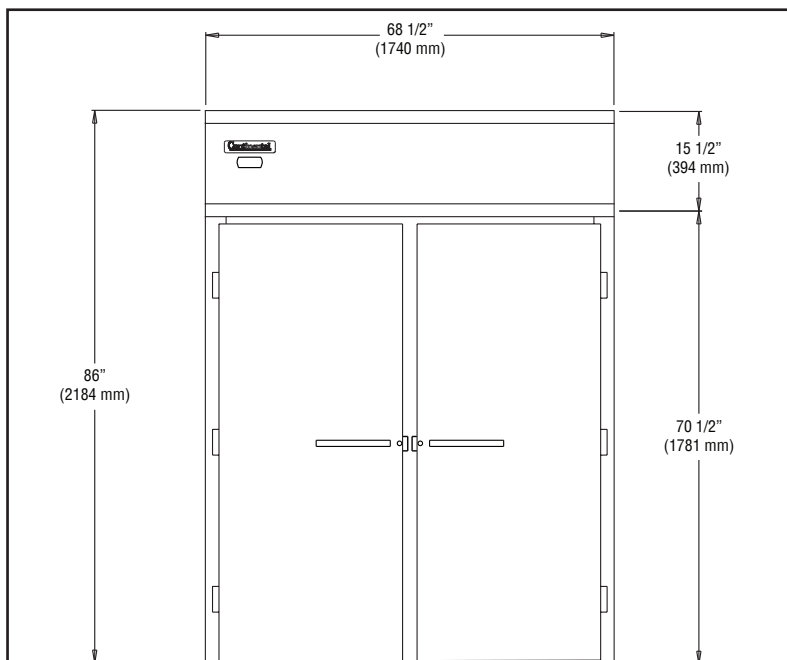

FRONT VIEW

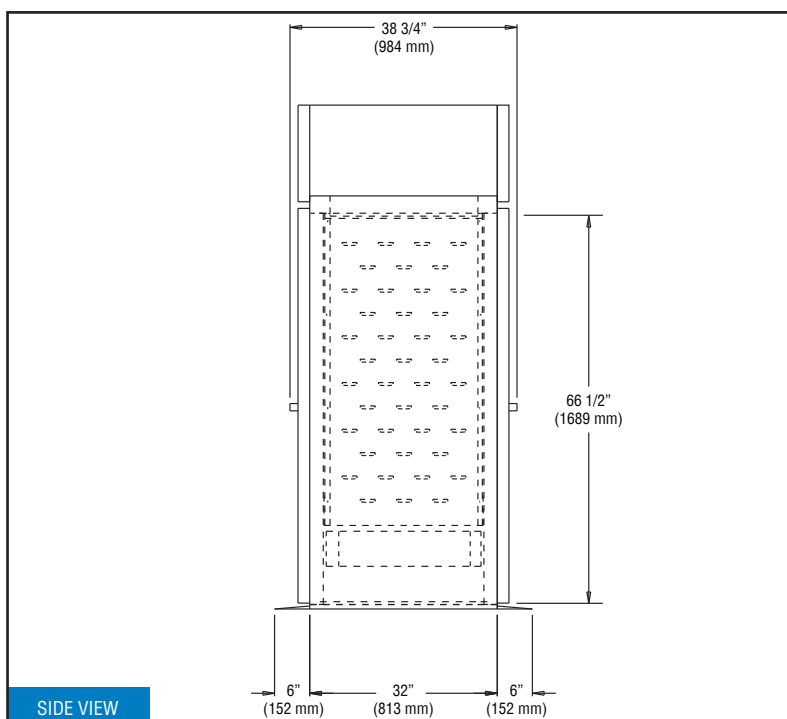

SIDE VIEW

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required on top and 3" on sides and rear.

Continental
Refrigerator

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

539 Dunksferry Road
Bensalem, PA 19020
www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.



© Copyright 2021. Continental Refrigerator.
A Division of National Refrigeration & Air Conditioning Products, Inc.

REVISED: 5/04/2022