



LEGEND™ Heavy-Duty Gas 18" (457mm) Counter-Top Range Series

Item No. _____

Project _____

Quantity _____



Model C18-5A shown

SHORT/BID SPECIFICATION

Counter-top Range shall be a Montague *Legend* Add-A-Unit Model [Specify one]:

- C18-5A**, one 18" x 31" (457 x 787mm) heavy-duty cast iron, precision ground open top grate, over two 30,000 BTU/hr lift off star burners; with an individual burner controls and automatic standing pilots;
- C18-9A**, with one 18" x 31" (457 x 787mm) French top with ring and cover in front of cast iron plate with one 35,000 BTU/hr burner;
- C18-9ASE**, with one 18" x 31" (457 x 787mm) solid cast iron precision ground hot top with EVEN-HEAT 20,000 BTU/hr burner with individual burner controls and automatic standing pilots;
- C18-S**, with 16 gauge stainless steel work top:

...an 18" (457mm) wide heavy-duty gas-fired unit with a stainless steel front, 4" (102mm) high flue riser, 3" (76mm) deep front rail and 4" (102mm) height-adjustable nickel finish legs standard; plus all the features listed and options/accessories checked:

MODEL C18-5A TOPSIDE FEATURES:

One 18" wide x 31" deep (457 x 787mm) open burner top, with:

- Heavily ribbed cast iron, surface-ground top grate over:
- Two large-diameter 30,000 BTU/hr lift off star burners with raised ports.
- Automatic, standing pilots
- Drip pan positioned under open burners

MODEL C18-9A TOPSIDE FEATURES:

One 18" wide x 31" deep (457 x 787mm) French Top with:

- Heavy cast iron precision ground plate with:
- Front-positioned removable ring & cover
- Front fired, banjo-type 35,000 BTU/hr burner
- Heat transfer studs cast in plate bottom
- 2" (51mm) side and front flanges isolate heat under plate
- Sloped, brick-lined flue for better heat transfer
- Drip pan positioned under burners

MODEL GUIDE

✓	Model No.	Overall Width	Range Top Configuration
	C18-5A	18" (457mm)	One 18" Open Top
	C18-9A	18" (457mm)	One French Top
	C18-9ASE	18" (457mm)	One 18" EVEN HEAT Hot Top
	C18-S	18" (457mm)	One piece Stainless Work Surface

MODEL C18-9ASE TOPSIDE FEATURES:

One 18" wide x 31" deep (457 x 787mm) Hot Top, with:

- Heavy cast iron precision ground plate
- Two front fired EVEN HEAT 20,000 BTU/hr burners
- Heat transfer studs cast on plate bottoms
- 2" (51mm) side and front flanges isolate heat under plate

MODEL C18-S TOPSIDE FEATURES:

- 18" x 34" (457 x 864mm) 16 gauge stainless steel work surface

STANDARD BASE CONSTRUCTION:

- Satin finish stainless steel front, with 3" (76mm) deep front rail
- Stainless steel exterior bottom
- Stainless steel 4" (102mm) rear flue riser
- 4" (102mm) adjustable nickel finish legs
- 1-1/4" front gas manifold with 1/2 union on each end

AGENCY APPROVALS

- NSF Listed
- ETL Design Certified to ANSI Z83.11 • CSA 1.8
- CE Approved • EN 203-1



HDCS-2 [Rev. 1/13]


LEGEND™ Heavy-Duty Gas 18" (457mm) Counter-Top Range Series

Item No. _____

Project _____

Quantity _____

Dimensions in brackets are millimeters

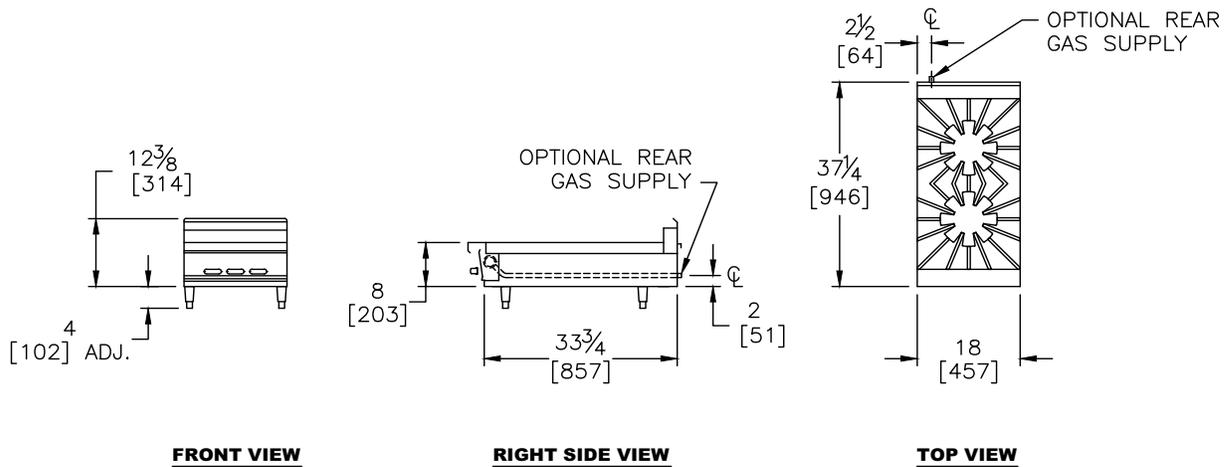

OPTIONS GUIDE:

Open Top Section:

- 304 stainless steel burner box assembly
- Ribbon Grate (C18-5 models only)[20,000 BTU burners required]
- 20,000 BTU/hr lift off Star Burner

General:

- 42" (1067mm) Range Depth [Add to Suffix: -40]
- Equipment Stand [Consult Factory]

Flex Connector Kit [1" NPT]:

- 3' (914mm) 4' (1219mm)

Security Options/Prison Package

[Consult Factory]

Panels & Shelves:

- Stainless steel back
- 18" (457mm) high riser
- 6" (152mm) wide stainless steel plate shelf

Manifolds: [Left rear with pressure regulator]:

- 1" NPT up to 400,000 BTU/hr

Manifold Cap:

- left side right side

Stainless Manifold Cover:

- left side right side

Controls: [see Heavy Duty option page HDS-44]

- Electronic rangetop pilot ignition
- Flame failure rangetop safety valves
- Electronic rangetop pilot ignition & flame failure rangetop safety valves

Finish:

- Stainless steel back panel
- Stainless steel side panels:
 - left side right side

Special Finish

[Consult Factory]

International Approvals:

- CE - Conformance Européenne - EN203-1
Includes flame failure valve option
- AGA - Australian Gas Association - AS 4563
Includes flame failure valve option
- Canadian Approval

INSTALLATION REQUIREMENTS & SHIPPING INFORMATION

1. Counter-Top Unit must be installed in accordance with local codes or in their absence with the National Fuel Gas Code: ANSI Z223.1; Natural Fuel Gas Code: CAN/CGA-B149.1 or Propane Installation Code: CAN/CGA-B149.2, as applicable. Compliance with codes is the responsibility of the Owner and Installer.
2. An adequate ventilation system is required. Refer to National Fire Protection Association Standard No. 96, "Vapor Removal from Cooking Equipment."
3. This appliance is intended for commercial use by professionally trained personnel. NOT intended for Residential Use.
4. Specify installation elevation: _____ if above 2000 feet (610m).
5. GAS INLET SIZE (All Models): 1-1/4" (32mm) front manifold with 1/2" union on each end provided for battery connection. A properly sized gas pressure regulator must be furnished by the Installer.
6. The incoming gas line pressure into the regulator should be 8"-14" w.c. for natural gas, and 12"-14" w.c. for propane gas.

Minimum Clearances	Combustible Construction	Noncombustible Construction
From Back Wall	2" (51mm)	0"
Left & Right Side	6" (152mm)*	0"
With or without 4" (102mm) legs	Suitable for installation on non-combustible counters ONLY	
*15" side clearance with open tops		

Specify Type of Gas:		<input type="checkbox"/> Natural	<input type="checkbox"/> Propane	Shipping Weight	Shipping Class	Cube (Crated) ft ³ /m ³
Manifold Pressure:		6.0" WC	10.0" WC			
Models:	Burners	BTU/hr (kW)	BTU/hr (kW)			
C18-5	2	60,000 (17.6)	60,000 (17.6)	158 lbs (72 kg)	85	5/.14
C18-9A	1	35,000 (10.3)	35,000 (10.3)	220 lbs (100 kg)	85	5/.14
C18-9ASE	2	40,000 (11.7)	40,000 (11.7)	192 lbs (87 kg)	85	5/.14
C18-S	none			110 lbs (50 kg)	85	5/.14



THE MONTAGUE COMPANY

1830 Stearman Avenue, Hayward, CA 94545
 800 345-1830 • Fax: 510 785-3342
 www.montaguecompany.com

Due to continuous product improvements, specifications are subject to change without notice.

