

PASS-THRU REFRIGERATOR

Model: 2RNPTHD

Natural Refrigerant R-290 Model

2-Section Pass-Thru Refrigerator with Half Doors



ENERGY STAR® Qualified Commercial Refrigerator

2RNPTHD - Stainless steel front, aluminum end panels and interior

2RNSAPTHD - Stainless steel exterior, aluminum interior

2RNSSPTHD - Stainless steel exterior and interior



Options and Accessories

(upcharge and lead times may apply)

| | |
|---------------------------------------|--|
| Additional epoxy coated steel shelves | Hinged glass doors (consult factory) |
| Chrome or stainless steel shelves | Special electrical req. (consult factory) |
| Rehinging of doors (consult factory) | Correctional Facility Options |
| Pan slide assemblies | <ul style="list-style-type: none">One way security screws |
| Wine rack | <ul style="list-style-type: none">Locking hasp (lock not included) |
| Adjustable legs | <ul style="list-style-type: none">Stainless steel mesh cover |
| Custom laminates | <ul style="list-style-type: none">Coverless hinges |
| Full doors | |

Consult factory for other model configurations, options and accessories.

Continental
Refrigerator

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

539 Dunksferry Road
Bensalem, PA 19020
www.continentalrefrigerator.com

Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

Standard Model Features

REFRIGERATION SYSTEM

Self contained, performance rated
“plug” refrigeration system

Natural, environmentally safe,
high efficiency R-290 refrigerant¹

Refrigeration system is readily accessible on
top of cabinet, separate from the “food zone”

Automatic, hot gas condensate evaporator

Expansion valve system

CABINET ARCHITECTURE

3” non-CFC polyurethane foam insulation

Smooth, polished chrome workflow door handles

Cam action, lift off hinges

Self-closing doors

Magnetic snap in Santoprene™ door gaskets

Cylinder lock in each door

Heavy duty, epoxy coated steel shelves

Heavy duty pilaster strips

5” casters

MODEL FEATURES

LED interior lighting

Electronic controller with digital display & hi-low alarm

Top and side air distribution ducts

Off-cycle defrost

Cabinet upper side panels and refrigeration “plug”
system can be removed and reinstalled at job site

¹ R-290 refrigerant meets all federal and state regulatory requirements.

APPROVAL:

Model Specifications

DIMENSIONAL DATA

| | |
|--|------------------|
| Net Capacity (cubic feet) | 50 (1416 cu l) |
| Width, Overall (inches) | 52 (1321 mm) |
| Depth, Overall (inches) (including handles) | 38 3/4 (984 mm) |
| Depth (inches) (less doors) | 32 (813 mm) |
| Depth (inches) (doors open 90°) | 79 (2007 mm) |
| Clear Door Width (inches) | 19 3/8 (492 mm) |
| Clear Half Door Height (inches) | 27 1/2 (699 mm) |
| Height, Overall (inches) (including 5" casters) | 82 1/4 (2089 mm) |
| Number of Doors | 8 |
| Number of Shelves | 6 |
| Shelf Area (square feet) | 40.8 (3.8 sq m) |
| Tray Slide Capacity (per half section) | 11 |

REFRIGERANT DATA

| | |
|-----------------------------|------|
| Condensing Unit Size (H.P.) | 1/3+ |
| Capacity (BTU per hour)* | 2560 |

ELECTRICAL DATA

| | |
|--|---------------------|
| Voltage (International) | 115/60/1 (220/50/1) |
| Feed Wires (including ground) | 3 |
| Total Amps (International) | 6.4 (4.7) |
| 10 ft. Cord/Plug [attached] (International) | Yes (No) |

SHIPPING DATA



| | |
|------------------------------|------------------|
| Height - Crated (inches) | 85 1/2 (2172 mm) |
| Width - Crated (inches) | 64 (1626 mm) |
| Depth - Crated (inches) | 42 (1067 mm) |
| Volume - Crated (cubic feet) | 133 (3766 cu l) |
| Weight Std - Crated (pounds) | 580 (263 kg) |
| Weight SS - Crated (pounds) | 610 (277 kg) |

* Rating @ +25°F evaporator, 90°F ambient
Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug
(varies by country)

Model Plan Views

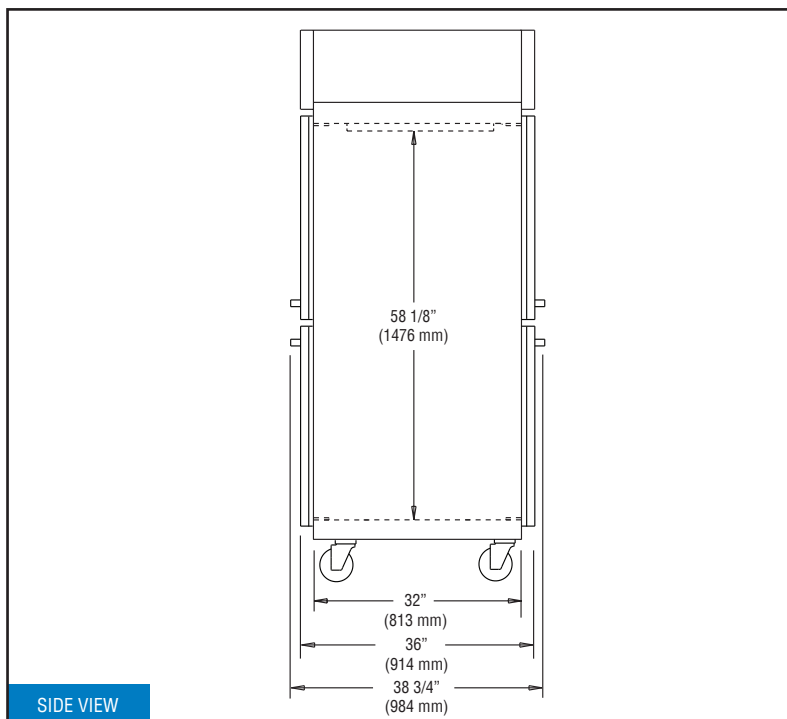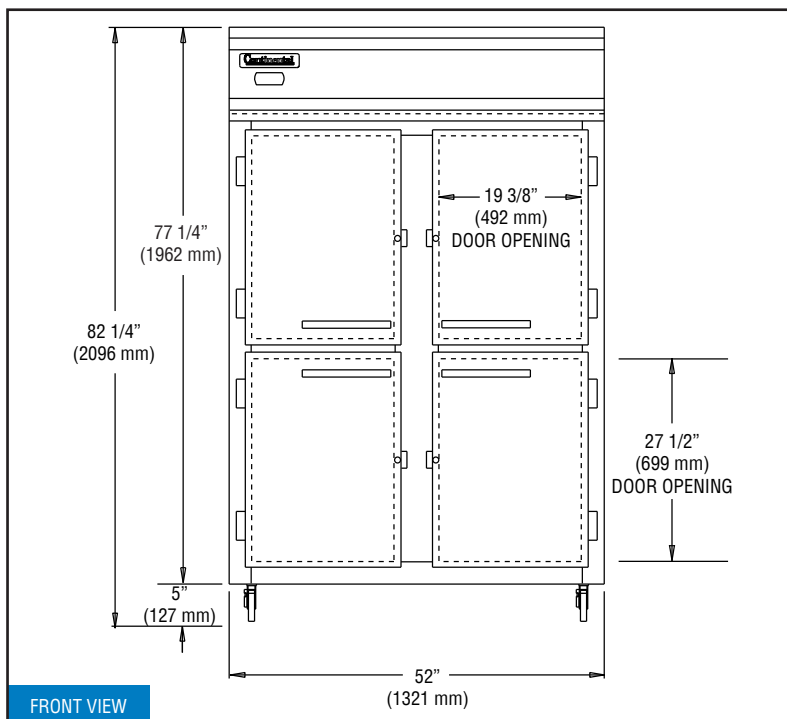

IMPORTANT NOTE: If the cabinet is located under a low ceiling, a minimum clearance of 12" is required on top and 3" on sides.

Continental
Refrigerator

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

539 Dunksferry Road
Bensalem, PA 19020
www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.



© Copyright 2021. Continental Refrigerator.
A Division of National Refrigeration & Air Conditioning Products, Inc.

REVISED: 5/18/2022