DESIGNER LINE REFRIGERATOR/FREEZER

Model: D3RRFESN Natural Refrigerant R-290 Model

3-Section Dual Temp Extra-Wide Reach-In Refrigerator/Freezer (0°F) -Shallow Depth

D3RRFESN - Stainless steel front, aluminum end panels and interior D3RRFESNSA - Stainless steel exterior, aluminum interior D3RRFESNSS - Stainless steel exterior and interior



Options and Accessories

(upcharge and lead times may apply)	
Stainless steel case back	Custom laminates
Additional epoxy coated steel shelves	Special electrical req. (consult factory)
Chrome or stainless steel shelves	Correctional Facility Options
Rehinging of doors (consult factory)	One way security screws
Pan slide assemblies	Locking hasp (lock not included)
Wine rack (refrigerator section)	Stainless steel mesh cover
Casters	Coverless hinges
Half doors	

Consult factory for other model configurations, options and accessories.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Project Name:		
Model Specified:		
Location:		
Item No:	Quantity:	
AIA #:	SIS #:	

Standard Model Features

REFRIGERATION SYSTEM

Separate, self contained, performance rated refrigeration systems (coil housing in cabinet zones) Natural, environmentally safe, high efficiency R-290 refrigerant¹

Expansion valve system

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation Smooth, polished chrome workflow door handles Cam action, lift off hinges Self-closing doors Magnetic snap in Santoprene[™] door gaskets Cylinder lock in each door Heavy duty, epoxy coated steel shelves Heavy duty pilaster strips Adjustable 6" stainless steel legs

MODEL FEATURES

LED interior lighting Electronic controllers with digital display & hi-low alarm Off-cycle defrost (refrigerator section) Automatic electric defrost (freezer section)

¹ R-290 refrigerant meets all federal and state regulatory requirements.

APPROVAL:

Model Specifications

DIMENSIONAL DATA Net Capacity (cubic feet) 50/21 (1416/595 cu I) Width, Overall (inches) 85 ½ (2172 mm) Depth, Overall (inches) 29 1/4 (743 mm) (including handles) Depth (inches) (less doors) 25 7/8 (657 mm) Depth (inches) (doors open 90°) 51 ¹/₈ (1299 mm) Clear Door Width (inches) 21 7/8 (556 mm) Clear Half Door Height (inches) 27 ¹/₂ (699 mm) Height, Overall (inches) 82 1/4 (2089 mm) (including 5" casters) Number of Doors 3 Number of Shelves 9 Shelf Area (square feet) (per section) 20.4 (1.9 sq m) **REFRIGERANT DATA** Condensing Unit Size (H.P.) 1/3+, 1/2 Capacity (BTU per hour)* 2560 / 1590 **ELECTRICAL DATA** Voltage (International) 115/60/1 (220/50/1) Feed Wires (including ground) 3/3 Total Amps (International) 8.1 (4.9) / 7.6 (4.2) Defrost Amps (International) 3.7 (2.0) (2) 10 ft. Cord/Plug [attach.] Yes (International) (No) **SHIPPING DATA** Height - Crated (inches) 85 ½ (2172 mm) Width - Crated (inches) 90 (2286 mm) Depth - Crated (inches) 42 (1067 mm) Volume - Crated (cubic feet) 181 (5125 cu l) Weight Std - Crated (pounds) 885 (401 kg) Weight SS - Crated (pounds) 995 (451 kg) * Rating @ +25°F evaporator, 90°F ambient (refrigerator)

* Rating @ -15°F evaporator, 90°F ambient (freezer)

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with two NEMA-5-15P Plugs (varies by country)



Due to our continued efforts in developing innovative products, specifications subject to change without notice.





Toll-Free: 800-523-7138

Phone: 215-244-1400


Fax: 215-244-9579


539 Dunksferry Road

Bensalem, PA 19020 www.continentalrefrigerator.com

© Copyright 2021. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc

Model Plan Views

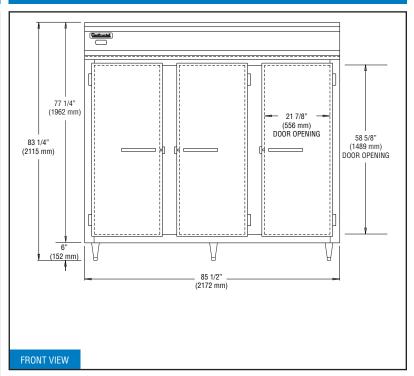

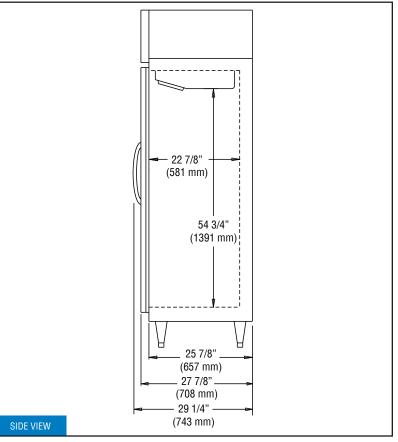

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a <u>minimum</u> clearance of 12" is required on top and 3" on sides and rear.
