



Your Solutions Partner

Specifications

F.O.B. Sedalia, Missouri 65301



Model: ADI-4M-N7

OPTIONS:

- ☐ Condensate Evaporator
- ☐ Stainless steel louvered grille
- ☐ Compressor Left side
- ☐ Adapter bars

Certifications:



DUKE MANUFACTURING CO.

2305 N. Broadway

St. Louis, MO 63102

800.735.3853 Toll Free

314.231.5074 Fax

www.dukemfg.com

SS-1089 Drop In Mechanical 8in Deep NSF7

Specification subject to change



Approval Stamp(s):

PRODUCT INFORMATION:

PROJECT: _____

ITEM: _____

QUANTITY: _____

MODEL:

Drop-Ins - Cold Pan

Mechanical - 8" Deep Liner Meets NSF Standard 7

- ☐ ADI-1M-N7 (1) 4" Deep 12" x 20" pan
- ☐ ADI-2M-N7 (2) 4" Deep 12" x 20" pan
- ☐ ADI-3M-N7 (3) 4" Deep 12" x 20" pan
- ☐ ADI-4M-N7 (4) 4" Deep 12" x 20" pan
- ☐ ADI-5M-N7 (5) 4" Deep 12" x 20" pan
- ☐ ADI-6M-N7 (6) 4" Deep 12" x 20" pan

BODY:

- Heavy gauge, 300 Series stainless steel
- Overhang on front, back and ends w/locking tabs
- Vinyl foam gasket as sealant
- 300 Series stainless steel cold pan liner
- Product recessed 3" below top
- Insulated all four sides and bottom
- 1" cast brass drain and plug
- Adapter bars furnished for full size pans
- Removable stainless brackets 3" below top


REFRIGERATION:

- Copper coils attached to all sides of liner - R448a refrigerant
- Open angle-iron suspended compressor compartment
- Remote mounted on/off switch with stainless steel face plate
- 120V condensing unit
- 6' cord and plug - NEMA 5-15
- Five year warranty on compressor motor

EXTERIOR HOUSING

- Heavy gauge paint grip steel

Drop In Mechanical 8" Deep NSF7

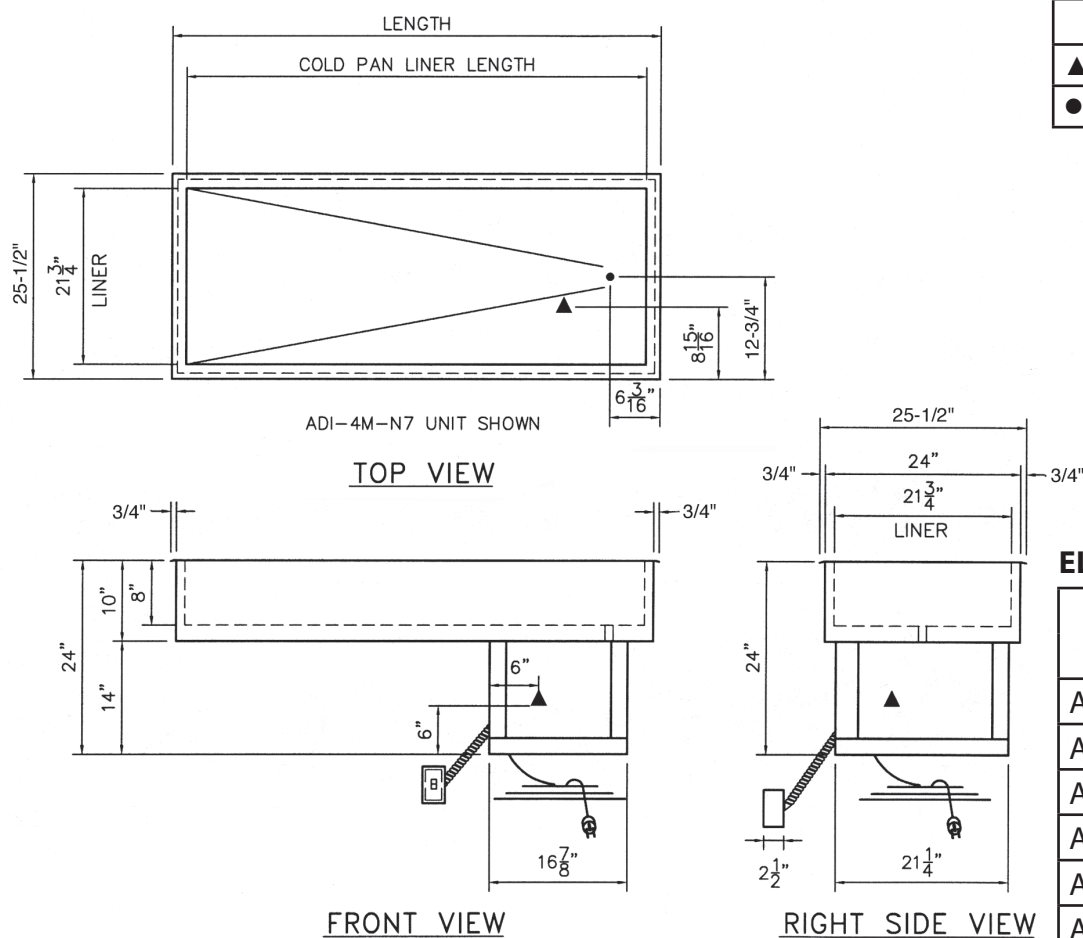

ELECTRICAL SPECS:

Model	120 Volt	
	Amps	HP
ADI-1M-N7	6.14	.33
ADI-2M-N7	6.14	.33
ADI-3M-N7	6.78	.5
ADI-4M-N7	6.78	.5
ADI-5M-N7	6.78	.5
ADI-6M-N7	6.78	.5

DIMENSIONS - Liners are 21-3/4" (55.3 cm) W; cutouts 24-5/8" (62.6cm) W

FREIGHT CLASS: 100

Model	Overall Length		Cold Pan - L		Cutout - L		Width		Height		Adapter Bars	Cube ft. Crated	Weight	
	in	cm	in	cm	in	cm	in	cm	in	cm			lbs	kg
ADI-1M-N7	18 7/8	45.7	14 1/2	36.8	17 1/2	44.5	25 1/2	64.8	24	61.0	0	13.2	150	68.2
ADI-2M-N7	32 7/8	81.3	28 1/2	72.4	31 1/2	80.0	25 1/2	64.8	24	61.0	1	20.8	160	72.3
ADI-3M-N7	46 7/8	116.8	42 1/2	108.0	45 1/2	115.6	25 1/2	64.8	24	61.0	2	28.5	175	90.9
ADI-4M-N7	60 7/8	152.4	56 1/2	143.5	59 1/2	151.1	25 1/2	68.4	24	61.0	3	36.1	200	113.6
ADI-5M-N7	74 7/8	188.0	70 1/2	179.1	73 1/2	186.7	25 1/2	68.4	24	61.0	4	46.8	230	138.6
ADI-6M-N7	88 7/8	223.5	84 1/2	214.6	87 1/2	222.3	25 1/2	68.4	24	61.0	5	51.4	280	159.1

24 REMOTE CONTROL CUTOUT IS 4-1/8" H X 2-3/16" W



Duke Manufacturing Co.
2305 N. Broadway
St. Louis, MO 63102

Phone: 314-231-1130
Toll Free: 1-800-735-3853
Fax: 314-231-5074

www.dukemfg.com

Printed in U.S.A
© 2019, Duke Manufacturing Co.