



T30 LSP



T50 LSP



T80 LSP

SOLID-DOOR LOW TEMPERATURE REACH-IN FREEZERS

Solid door vertical low temperature freezers manufactured by Global Refrigeration are unsurpassed in performance, reliability, durability and offer the best return on investment in the industry.

The cabinets are available in one door (T30LSP), two door (T50LSP) and three door (T80LSP) models. The patented Kelvinator design and Global innovations offer interior cabinet temperatures ranging from 0°F to -20°F.



All products are certified for energy , safety and sanitation. NSF/ ANSI 7 Standards

FEATURES

- 20 gauge steel interior and exterior foamed in place with white powder coat paint
- Patented Kelvinator technology guarantees consistent temperature
- Solid high density foamed in place solid doors with heated perimeter and mullion(s)
- Digital temperature controller with programmable defrost options & LED display
- Auto door switch turns off fans when doors open eliminating frost & icing issues
- Top mount compressor
- Heated drain pan dissipates condensation, no plumbing required

ACCESSORIES

- Casters Kit
- Shelf Kits
- Black Color Option
- Stainless Steel Exterior Option

SOLID-DOOR REACH-IN FREEZERS

Refrigerant Type: R290

TECHNICAL DATA


MODEL	T30LSP	T50LSP	T80LSP
Temp Range	0°F to -20°F	0°F to -20°F	0°F to -20°F
Exterior Dimensions			
Length	31"	52"	78"
Depth	36.88"	36.88"	36.88"
Height	83.75"	83.75"	83.75"
Interior Dimensions			
Length	26 1/4"	47 1/4"	73 1/4"
Depth	29 5/8"	29 5/8"	29 5/8"
Height	60 5/8"	60 5/8"	60 5/8"
Number of Doors	1	2	3
Door Construction	Foam-in-place urethane	Foam-in-place urethane	Foam-in-place urethane
Hinge Type	Spring-loaded, cam	Spring-loaded, cam	Spring-loaded, cam
Number of Shelves	4+1 bottom rack	8+1 bottom rack	12+1 bottom rack
Shelf Type	Cantilever, Epoxy Coated Steel Wire	Cantilever, Epoxy Coated Steel Wire	Cantilever, Epoxy Coated Steel Wire
Insulation	Foam-in-place urethane	Foam-in-place urethane	Foam-in-place urethane
Wall Thickness	2 3/8"	2 3/8"	2 3/8"
Capacity (cu. ft.)	27.3	49.1	76.2
Capacity (1/2-gal. pkg.)	161	324	486
Shipping Weight	526 lbs.	755 lbs.	900 lbs.
Amp Draw	10.5	12.0	12.0
Electrical	115/60/1	115/60/1	115V/60/1
Interior Finish	High-quality Powder-coat Finish on Galvanized Steel		
Electrical Information	NEMA 5-15P	NEMA 5-15P	NEMA 115/60/1
Refrigerant Type	R290	R290	R290

SPECIFICATIONS


T30LSP, T50LSP, T80LSP

Solid Door Reach-In freezer, Global model T___LSP. The unit shall consist of white powder coat finished galvanized steel interior & exterior, foamed in place. The unit will be supplied with 4 cantilever shelves and a bottom shelf per door opening.


Cabinet as specified to use R290 refrigerant. Refrigeration control shall be thermostatic control with a temperature range of 0° F to -20° F.




T30LSP, T50LSP, T80LSP
SIDE VIEW

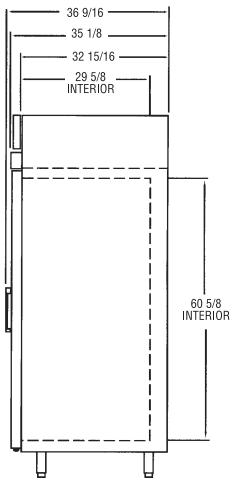


T30LSP
FRONT VIEW

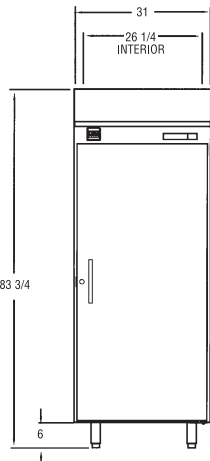

T50LSP
FRONT VIEW

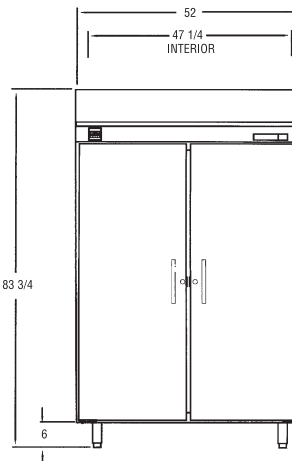

T80LSP
FRONT VIEW

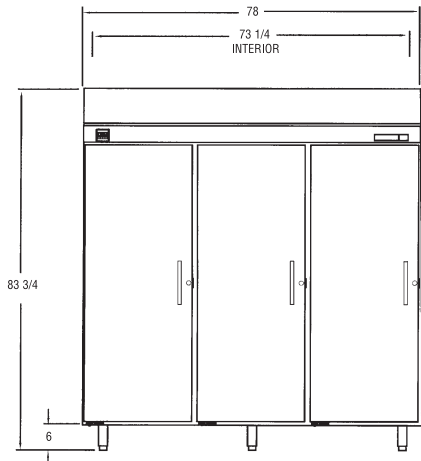

Cabinet designed for optimum performance in air-conditioned area at 70°F to 75°F ambient temperature and 50% to 55% relative humidity.

Global Refrigeration, Inc., reserves the right to change specifications, terms, and prices without notice.

Global Refrigeration, Inc.

5855 Grant Avenue, Cleveland, OH 44105

888.650.9799

www.globalref.com