

VICTORY[®]

ULTRASPEC

PROJECT: _____

ITEM # _____ QTY: _____

MODEL # _____

AIA # _____ SIS # _____

FISH FILE REACH-IN REFRIGERATOR

RS-1D-S1-HC-FF



CABINET CONSTRUCTION

- Stainless Steel Exterior And Interior
- Stay-Open Drawer Feature For Easy Product Loading
- One Piece, Snap-In Magnetic Drawer Gaskets
- Stainless Steel Pans That Drain Independently Into Main Drain Line
- Low Profile Horizontal Drawer Handles
- Hinged Front Shroud Makes Condenser Cleaning Easier
- 6" High Adjustable Stainless Steel Legs
- 8' Cord And Plug (see electrical data for details)

FEATURES

- Exclusive Temperature Monitoring Solution
- Full Electronic Control With Touchpoint Interface
- Manager's Lockout Feature
- Expansion Valve Technology
- Variable Speed Compressor Technology

REFRIGERATION

- Refrigeration System Uses R-290 Refrigerant To Comply With All Environmental Concerns
- Hot Gas Condensate Evaporator
- Adaptive Defrost For Reduced Energy Consumption And More Consistent Product Temperatures
- Epoxy Coated Evaporator Coil, Located Out Of The Food Zone
- Refrigerator Capable Of Maintaining Product Temperature 36°F To 38°F



- ▶ 3 Year Parts & Labor Warranty
Plus An Additional 4 Year Compressor Warranty
- ▶ Exclusive 2 Year Warranty On Magnetic Drawer Gaskets
- ▶ Lifetime Warranty On Handles & Hinges (parts only)



Please Verify Qualifying Units By Visiting:
www.energystar.gov/cfs

OPTIONS & ACCESSORIES

- Secure-Temp™ Technology
- Stainless Steel Rear Grille
- Remote Models* (6" legs only)
(refrigerant must be specified at time of order, see note on back page)
- Drawer locks

3779 Champion Blvd, Winston-Salem, NC 27105


ph: (888) 845-9800 | fax: (800) 253-5168

Sales@VictoryRefrigeration.com | VictoryRefrigeration.com

Rev. 10/7/22 Printed in U.S.A.

APPROVAL: _____ DATE: _____

FISH FILE REACH-IN REFRIGERATOR

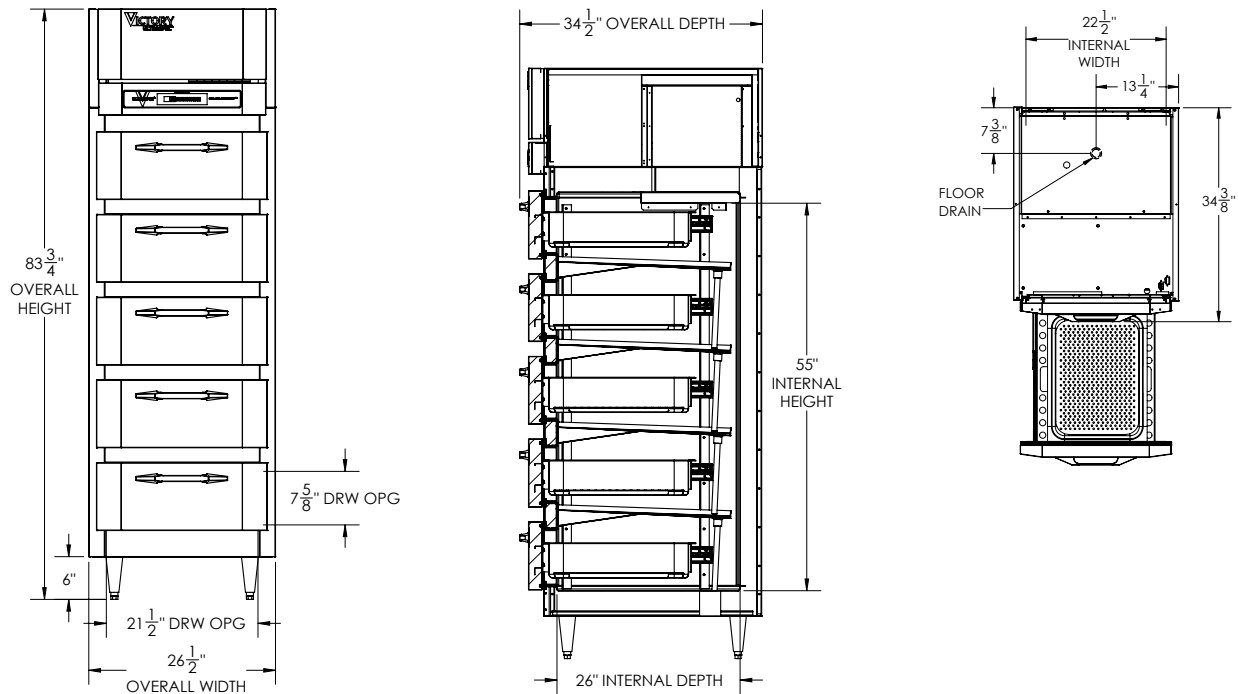

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM)

12" Top and 3" rear clearance is required

CHARACTERISTICS		ELECTRICAL DATA		SHIPPING DETAILS	
Net Capacity (cubic ft.)	20.9	Cabinet Voltage**	115/60/1	Height	88"
Width, Overall (in.)	26 1/2"	Total Amperes	6.5	Width	35"
Depth, Overall (with handle)	34 1/2"	NEMA Plug (8' cord)	5-15P	Depth	41"
Height Overall (6" legs)	83 3/4"	REFRIGERATION DATA		Crated Weight	500 lbs
Depth, Drawer Open 90°	57 1/4"	Condensing Unit Size, HP	1/3	*NOTE: Remote units are field wired and comes with 6" legs. Refrigerant must be specified at time of order.	
Drawer Opening (in.)	21 1/2" x 7 5/8"	Refrigerant	R-290		
No. Of Drawers	5	Capacity (BTU/HR) (100°F/20°F)	2800		
		Heat Rejection (BTU/HR)	4200		
		Charge (lbs/grams)	0.3307/150		

** NOTE: This unit utilizes variable speed compressor technology. The compressor can experience nuisance tripping on Class A GFCI outlets which have a trip limit of 4 mA to 6 mA. To avoid this issue in a location that requires GFCI circuit protection, Victory recommends using a HUBBELL Model Number GFRST83W 20A Heavy Duty Hospital Grade Self-Test GFCI Receptacle.

3779 Champion Blvd, Winston-Salem, NC 27105 | ph: (888) 845-9800 | fax: (800) 253-5168

Sales@VictoryRefrigeration.com | VictoryRefrigeration.com

Rev. 10/7/22 Printed in U.S.A.

an Ali Group Company



The Spirit of Excellence